


All in one PC Widescreen Display

All in one PC Widescreen Display Chassis Mount, 21.5" LCD monitor, 1920 x 1080, 380 nits, Mother Board: Gigabyte B75TN embedded mother board, i5-3470T (3M Cache, up to 3.60 GHz)+Flex wall mount., 8GB Memory and 500GB HDD. VESA 100/100 Included Low profile Wall Mount Bracket. Operating Temperature: -5C ~ +50C, Front IP64. No OS



(Model: BCPCW2150HDI5-PCT-SO1)




FEATURES:

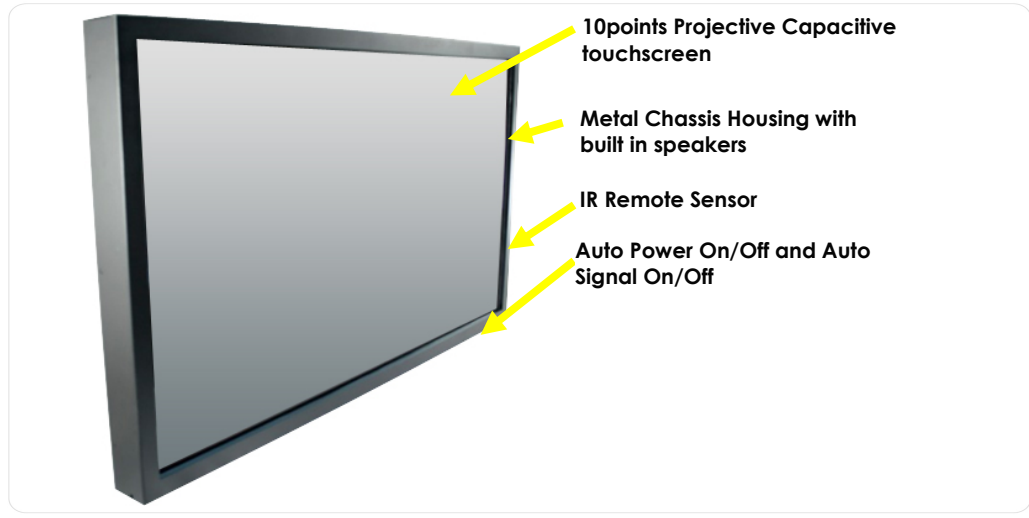

BCPC Series All in one PC with/ without 10points Projective Capacitive Touch Widescreen Display Chassis Mount LCD Monitor (SWOP PC Tray)

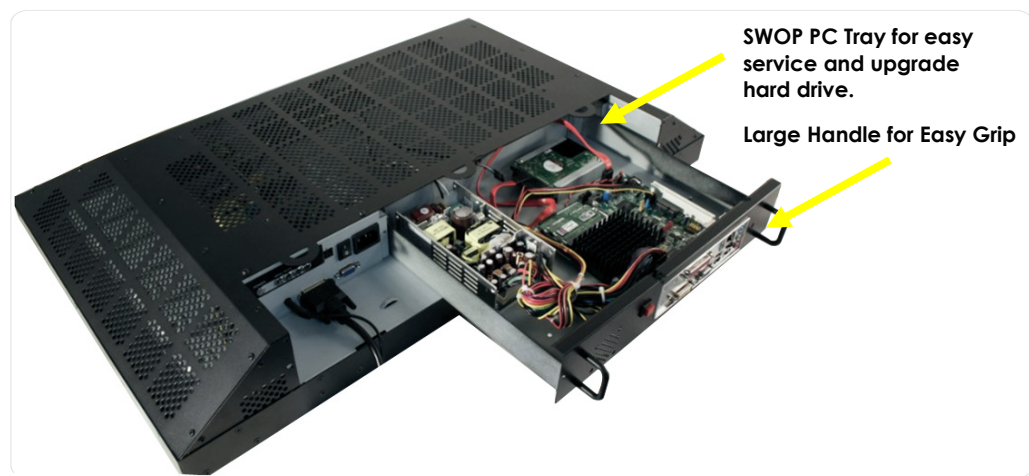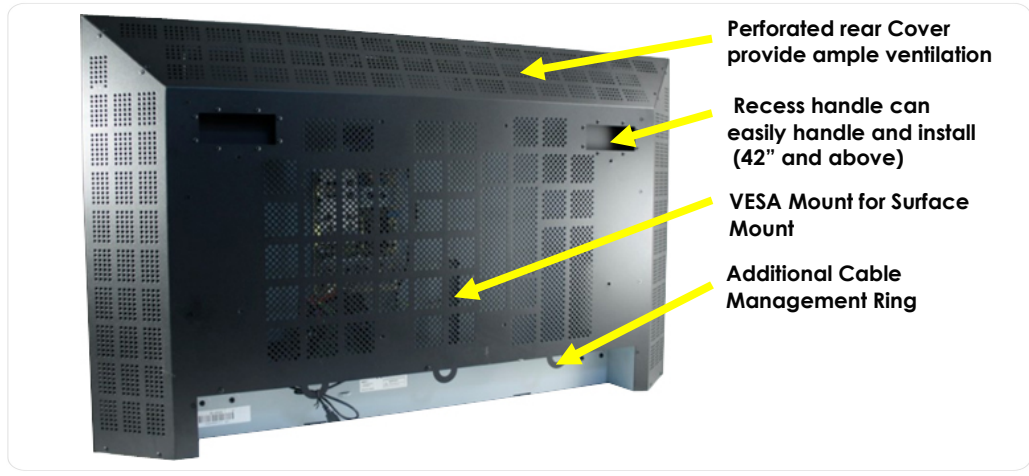

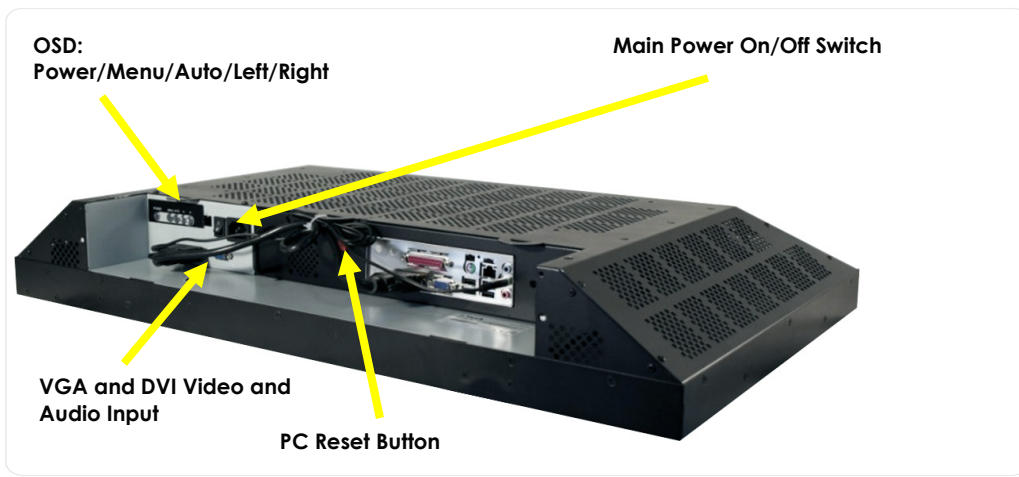

Display Specifications – LED PANEL


Active Screen Size	21.5"(16:9)
Display Area(mm)	476.64(H) x 268.11 (V)
Number of Pixels	1920 x 1080
Contrast Ratio	3000 : 1
Colors	16.7M
Brightness(cd/m ²)	380
View Angle	R/L178° x U/D178°
Recommended Resolution	1920 x 1080 @ 60Hz
Response Time	5 ms
Life Time	30,000/hr
Signal Input	1 x VGA, 1 x DVI

Mechanical Specifications

Operating Temp.	-5°C~50°C
Relative Humidity	20~80% RH
Storage Temp.	-20°~55°C
Dimensions(mm)	558(L)x350(W)x84(D)
Wall Mount (LxW/mm)	100(L)x100(W)
Color	Black

Accessories

DVI Wire x 1
3.5" Audio Wire x 1
Power Core x 1

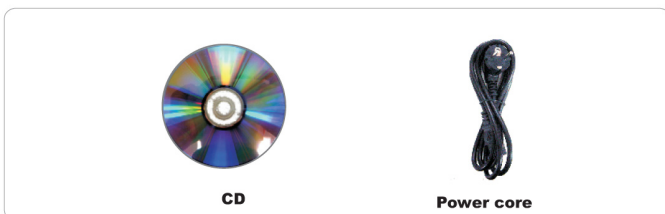

System Specifications

CPU	i5-3470T (3M Cache, up to 3.60 GHz)
Motherboard	Gigabyte B75TN embedded mother board
RAM	DDR3 SDRAM 8G
Storage	500G HDD / 120G SSD
USB Port	4 x USB 3.0 Port
PC Audio output	Realtek ALC662
Speaker Output	2 x 8 w internal speaker
LAN Port	1 x RJ-45 10/100/1000
WIFI	IEEE 802.11b/g/n
Touch Screen	Infrared Touch 6 points

Power



Power Input	110V/220V AC
Power Consumption	80W

PCT Touch (options)

Windows 8/7/Vista /XP, MAC OS X, Linux, Android etc.	
Support panels of flat type for LCD	
Touch Points	10 points touch
Operating Temp.	-20°C ~ 70°C.
Operating Hum.	45%~85% RH
Storage Temp.	-30°C ~ 80°C.
Light-proof Capacity	Resisting lights from all angles
Hardness of surface	6H
Transmission	85% Typ. (By BYK-Gardner at 550nm.)



Included Low Profile Wallmount Bracket

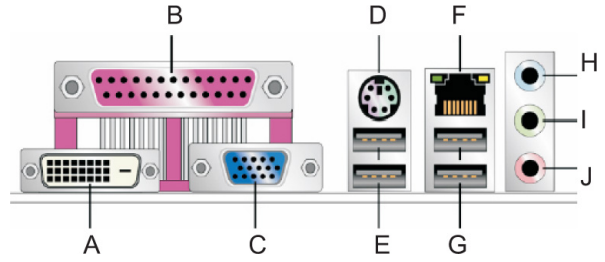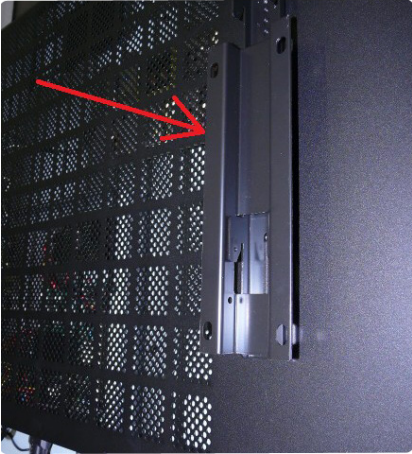

- A - DVI-D port
- B - Parallel port
- C - VGA port
- D - PS/2 keyboard/mouse port
- E - USB ports
- F - LAN port
- G - USB ports
- H - Line in
- I - Line out
- J - Mic in

Mechanical Drawings

