



SPECIFICATION

Model:SE98X



i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

1.Functions

Signal Input (BNC) X 2

Signal Output (BNC) X 2

1080P Resolution (HDMI) X 1


PC VGA X 1

AUDIO Input: R, L

PC AUDIO in

YPbPr X 1 (Option)

2.Dimension: 180mm(L) X 105mm(W) X 20mm(H)

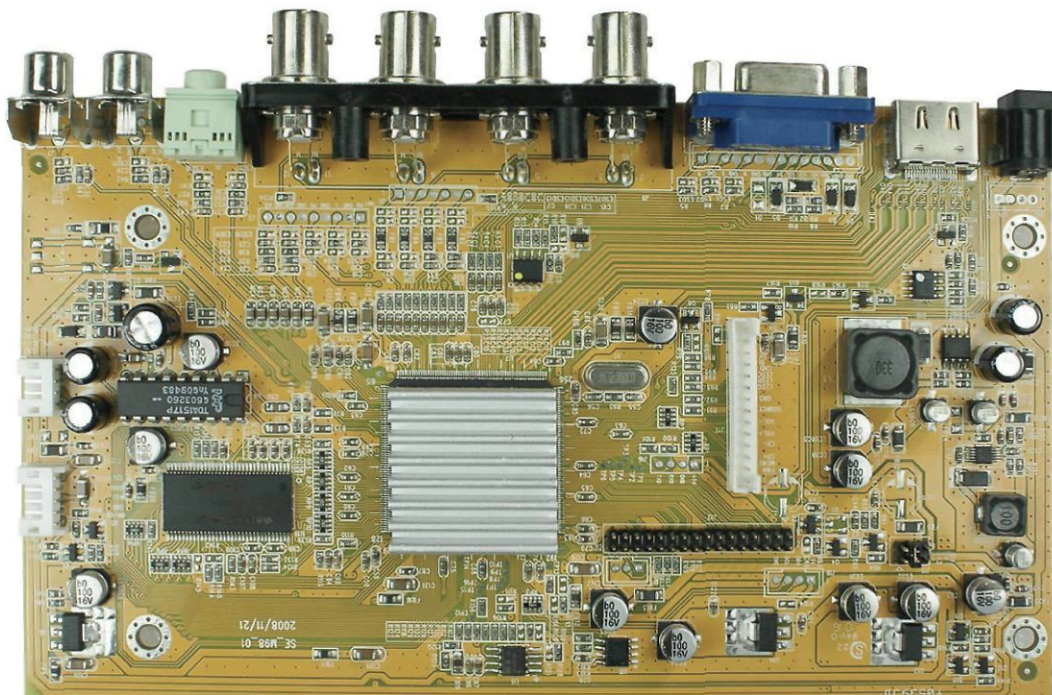

3. Power Consumption

Panel: AU 19" EG01

Inverter: 4 Lamp

Resolution: 1280 X 1024 75Hz

Condition	Audio minimum	Audio maximum
A/D Board + Panel + Inverter	15W	20W
Power saving	0.12W	

4. Connector pin Description

Key Connector (J17)

PIN	SYMBOL	PIN	SYMBOL
1	POWER	8	GND
2	MENU	9	LED_GRN
3	UP	10	LED_RED
4	Down	11	-
5	Right	12	GND
6	Left	13	IR
7	SOURCE	14	5V

Speaker (J15)


PIN	SYMBOL	PIN	SYMBOL
1	SPK_R	3	SPK_L
2	GND	4	GND

LVDS PIN (J3)

PIN	SYMBOL	PIN	SYMBOL
1	VCC	17	RXEIN0-
2	VCC	18	RXEIN0+
3	RXOIN0-	19	RXEIN1-
4	RXOIN0+	20	RXEIN1+
5	RXOIN1-	21	RXEIN2-
6	RXOIN1+	22	RXEIN2+
7	RXOIN2-	23	GND
8	RXOIN2+	24	GND
9	GND	25	RXECKIN-
10	GND	26	RXECKIN+
11	RXOCKIN-	27	RXEIN3-
12	RXOCKIN+	28	RXEIN3+
13	RXOIN3-	29	GND
14	RXOIN3+	30	GND
15	GND	31	NC
16	GND	32	NC

5. Menu Operation


Screen Setting

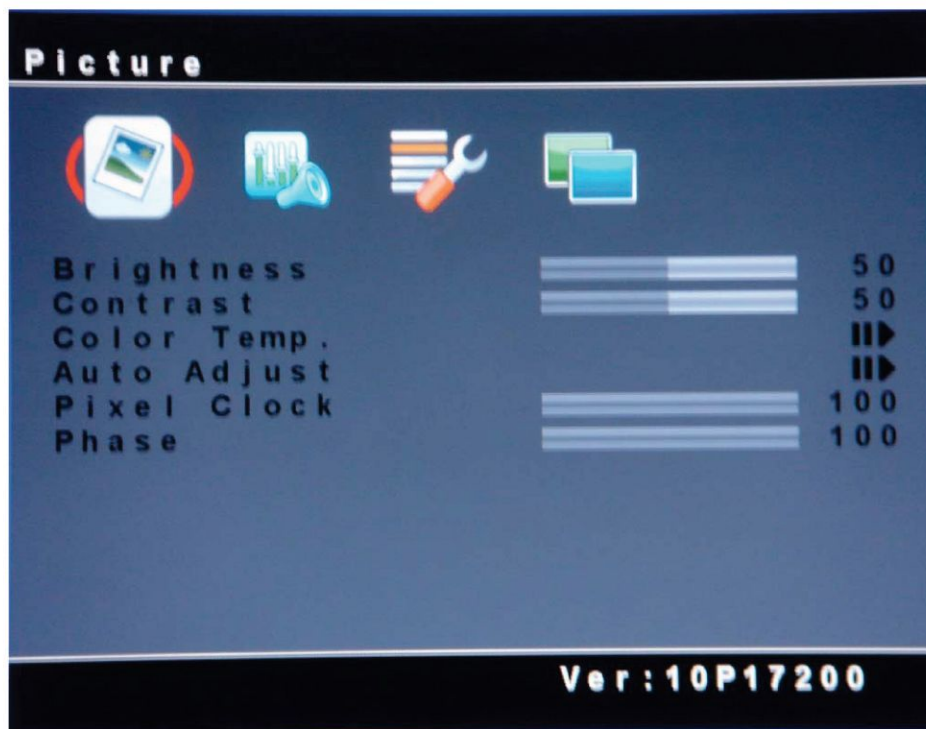

Volume Setting




OSD Function Setting

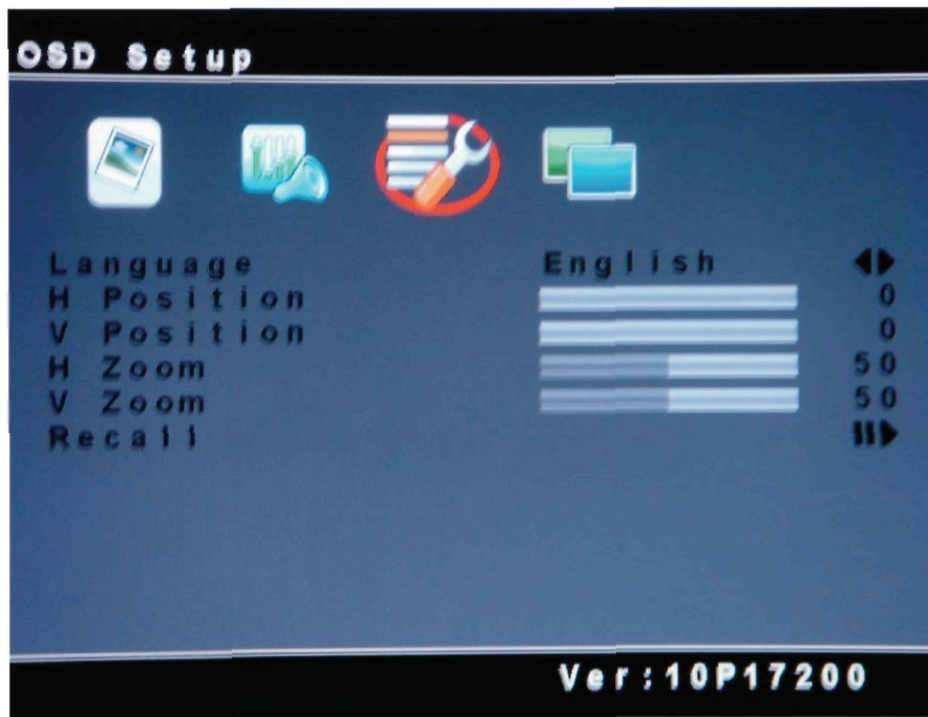

PIP Setting



Source Select

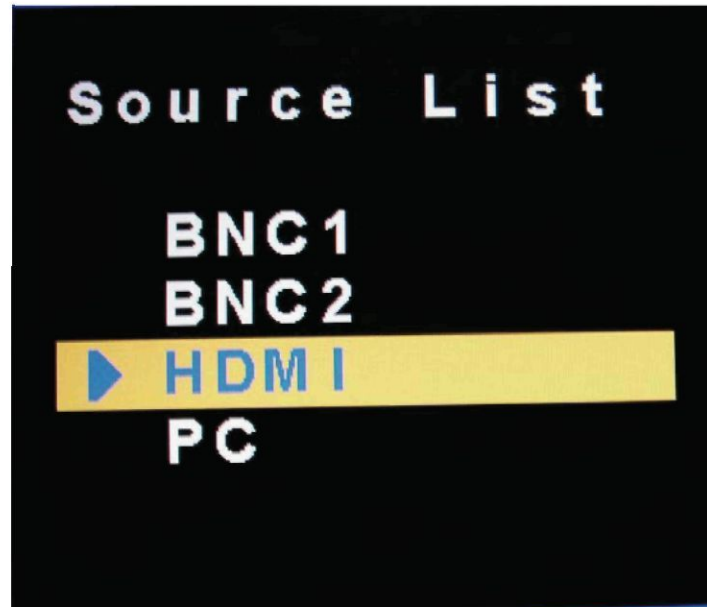

6. Burn in mode

Press MENU + Power Key



i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com