Video Wall Square LCD Display

Video wall 21.5" Square LCD Display
TFT Active Matrix - 22 Inch - 960 x 960
450nit - 4000:1 - 8 Ms - DVI-D
Display Port;HDMI;RJ-45;RS-232C – Black

Model: SMSQ2200

FEATURES:

Dramatic Video Walls

The SMSQ2200 can be configured in video walls up to 10 x 10 for strikingly different and artistic messaging that draws customer attention.
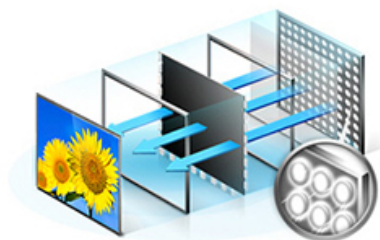
Reduced Operating Expenses

Highly efficient Direct-Lit LED backlighting technology produces high contrast levels for impactful messaging, but also generates less heat. That translates to reduced operating costs.

Easily Manage Content

Smart Scheduling enables video wall content control at all times with up to 3 programmable day/time calendars. The upgraded Multi Display Control allows control of multiple monitors through the embedded RS232C and RJ45 interfaces.

Powerful Optional Features

Provide even greater usability. Create video wall arrangements using the push and pull Wall Mount Kit. Create and control content on up to 100 displays with MagicInfo™ video wall software. Or increase PC functionality with the optional SBB-A PC module.
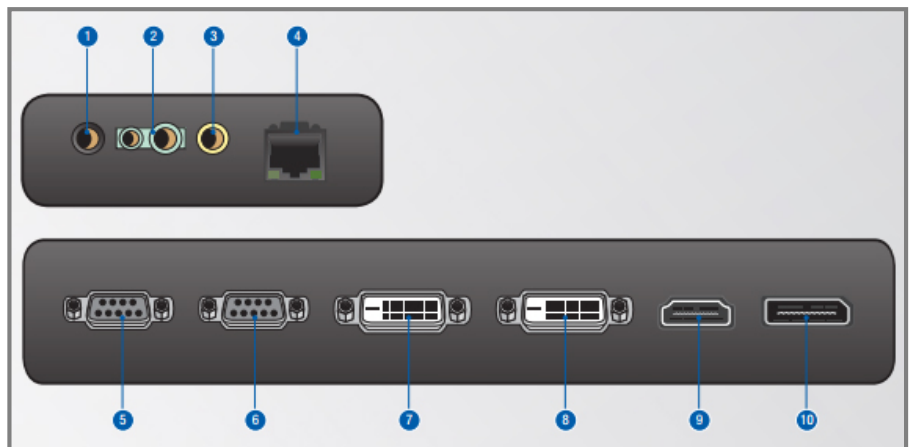
PICTURES:

SPECIFICATIONS:

Display	Screen Size	21.6" LED LCD
	Panel Technology	S-PVA (Direct Lit LED)
	Resolution	960 x 960
	Brightness	450 nits
	Contrast Ratio (Typical)	4000:1
	Viewing Angle Horizontal/Vertical)	178˚/178˚
	Response Time	8ms
	Input	DVI-D, DisplayPort, HDMI
Connectivity	Output	DVI-D (Loop Out), Stereo Mini Jack
	External Control	RS232C (In/Out), RJ45
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power	Power Consumption (Typical/Max)	67W / 72W
	Power Consumption (Standby)	<1W
Environment Conditions	Operating Temperature	0°C - 40°C
	Operating Humidity	10%~80% Non-Condensing
Features	Special	Ultra Narrow Bezel with Square Aspect Ratio, Digital Daisy Chain (up to 100 Displays)
	Integrated Tuner	N/A
	Media Player Type	SBB-A
	VESA Standard Wall Mount Interface	300 x 300mm
	Product Dimensions (without stand)	15.5" x 15.5" x 3.2"
Dimensions	Packaging Dimensions	18.6" x 18.6" x 7.4"
	Bezel Width	3.7mm (U/L), 1.8mm (R/B)
	Product Weight	14.3 lbs.
Weight	Shipping Weight	16.9 lbs.
	Standard Warranty	3-Year Onsite Parts/Backlight/Labor
Service	Included	Quick Setup Guide, Warranty Card, Application CD, Power Cord, DVI Cable, Remote Controller, Batteries, Panel Cover
Accessories	Optional Mount	-
	Optional Stand	N/A
	Emission Standard	EMC
Green Management	Energy Star 5.0 Compliant	Yes
	RoHS Compliant	Yes
	Packaging Recyclability	Packing Materials Recyclable

CONNECTIVITY:

1. **Audio Out**
2. **IR/Ambient Sensor In**
3. **IR Out**
4. **RJ45 LAN**
5. **RS232C Out**
6. **RS232C In**
7. **DVI Out (Loop Out)**
8. **DVI In**
9. **HDMI In**
10. **DisplayPort In**

MECHANICAL DRAWING: