
WOHLER AMP2A-10S

Premium Quality, Analog Self-Powered Speaker System - 10 Stereo Channels



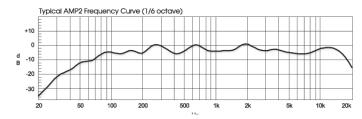

Features:

Premium Quality Drivers for Superior Reproduction 20 Balanced Analog Inputs (10 Stereo, Select I) Balanced Analog Output of Selected Stereo Source Powerful 104dB SPL at 2 feet (0.6m)

Two 20 Segment Tri-Color Level Meters Displaying VU or PPM
Excellent Frequency Response and Low Distortion
Focused Sound, Reduces Adjacent Bay Crosstalk
Audible Indication of Phase/Polarity Problems
Innovative LED Display of Phase/Polarity Relationships
Thorough Magnetic Shielding for Placement next to Video Monitors
Compact & Convenient, all this Power in only 2U of rack space
Headphone Jack, Mutes Speakers
Blowout Proof Speakers
Quick and Simple Installation

The AMP2A-10S provides self-powered, full-fidelity stereo audio monitoring in a compact two rackspace cabinet. A front panel switch allows the operator to select one stereo source for monitoring & output from up to 10 stereo analog inputs (20 channels). The AMP2A-10S features two 20 segment LED level meters showing VU or PPM for accurate level-metering. This unit contains three audiophile-quality drivers and three power amplifiers; two speakers and amplifiers reproduce midrange and high frequency information in stereo, while the third amp/driver combination handles summed LF information below the 500 Hz crossover point.

The unique design provides optimally focused sound for operators in an Ultra Near Field (1 to 3 ft.) working environment and offers performance comparable to that of many separate monitor pairs, yet does so without the installation hassles, awkward speaker placements and "added-on" look. This provides for a higher SPL for the operator while reducing overall ambient sound and adjacent bay crosstalk.


Excellent HF response reveals potential problems with audio whine or hiss and electronic rather than acoustic cancellation of bass frequencies provides positive audible detection of out-of-phase (reversed polarity) audio feeds. A headphone jack is provided on the front panel, usage automatically mutes the speakers. The front panel features an innovative LED Display of Phase/Polarity Relationships. Output limiter circuits are incorporated to protect the speakers, and extensive magnetic shielding allows placement immediately adjacent to video monitors with no color impurities.

The AMP2A-10S is ideally suited for use in VTR bays, mobile production vehicles, teleconferencing installations, multimedia systems, satellite link and cable TV facilities, and on-air radio studios. Built and rigorously, tested in the USA, the AMP2A-10S is backed by a strong warranty and a "Satisfaction Guaranteed" return policy.














WOHLER AMP2A-10S

Premium Quality, Analog Self-Powered Speaker System - 10 Stereo Channels

Rear Panel:

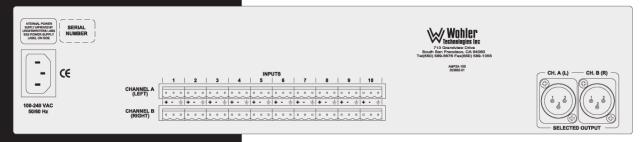

Analog Switches System Diagram: Right Channel Channe HEADPHONE OUTPUT Left Input 5 (Chan. A) Left Speaker Level Metering Channel Input Select Switch (ISS) 3 (Channel 1 Left Left Woofer Analog Amp Right Phase Indiator Left Right (Chan. A) (Chan. B) Right Speaker Right Input 5 Fast Out Fast Selected Source (Chan. B) Power Phase Indication Indication 9 (UL & CE Approved) Analog Switches

Specifications:
Input
Outputbalanced analog output of selected pair - XLR
Level meters 2 x 20 segment bargraphs
Level meter scale +6 to -40 dB
Level meter threshold6, 0, +4, +8 dBv: DIP switch selectable
Level meter dynamics
Midscale resolution I dB
Analog input impedance>40 kOhms balanced
Peak acoustic output @ 2 feet104dB SPL
Frequency response (1/6 octave)80Hz - 16kHz (±5dB) (-10dB @ 40Hz, 20kHz)
Power output RMS each side (4 Ohms) - 10W, 14W peak RMS center WOOFER (4 Ohms) - 25W, 35W peak
Electrical distortion<0.15% at any level below limit threshold
Acoustic distortion
Hum and noise better than -68dB below full output
Magnetic shielding<0.8 gauss any adjacent surface
Power consumption (AVG. MAX.)45W
Dimensions (HxWxD) 3.5 x 19 x 12" (89 x 483 x 305mm)
Weight (approx.)
Power supply

All specifications are subject to improvement

