

# Sunlight Readable Panel Mount High Brightness LCD

Industrial LCD Monitor - with Aluminum Front Bezel

IP65/NEMA4 Panel Mount (Aluminum-6mm), 8.4" 800x600, 1000nits LED  
Sunlight Readable High Brightness Wide Temperature -30C to 85C with VGA  
+ DVI input. Power Consumption 2.16 Watts



**1000 nits**

**Model: YPM0840PWTHB**


## FEATURES:

- Sunlight Readable.
- Suitable LED Backlight.
- SVGA (800x600)
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


## System Specifications

Panel Type	8.4-inch TFT LCD
Screen Diagonal	8.4-inch
Active Display Area (mm)	170.4 (H) x 127.8 (V)
Pixel Pitch (mm)	0.213 x 0.213
Number of Pixels	800 x 600
Contrast Ratio	600:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m <sup>2</sup> )	1000 cd/m <sup>2</sup> *without touch screen
Viewing Angle(Typ.)	80/80/80/60 (R/L/U/D)
Signal Connector	VGA+DVI
Power Source	AC100 ~ 240V, Universal +/- 10%
Power Consumption	2.16watts, normal operation
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ 85°C
Storage Temperature	-20 ~ 60°C
Plug & Play	VESA DDC 1/2B
Touch Type	Resistive Touch Screen
Transparency	> 80% (typ.)
Hardness of surface	3H
Linearity	±1.5%(max.)

## Clamp Mount

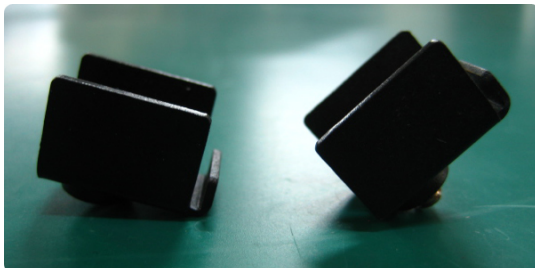


## Mechanical Drawing:

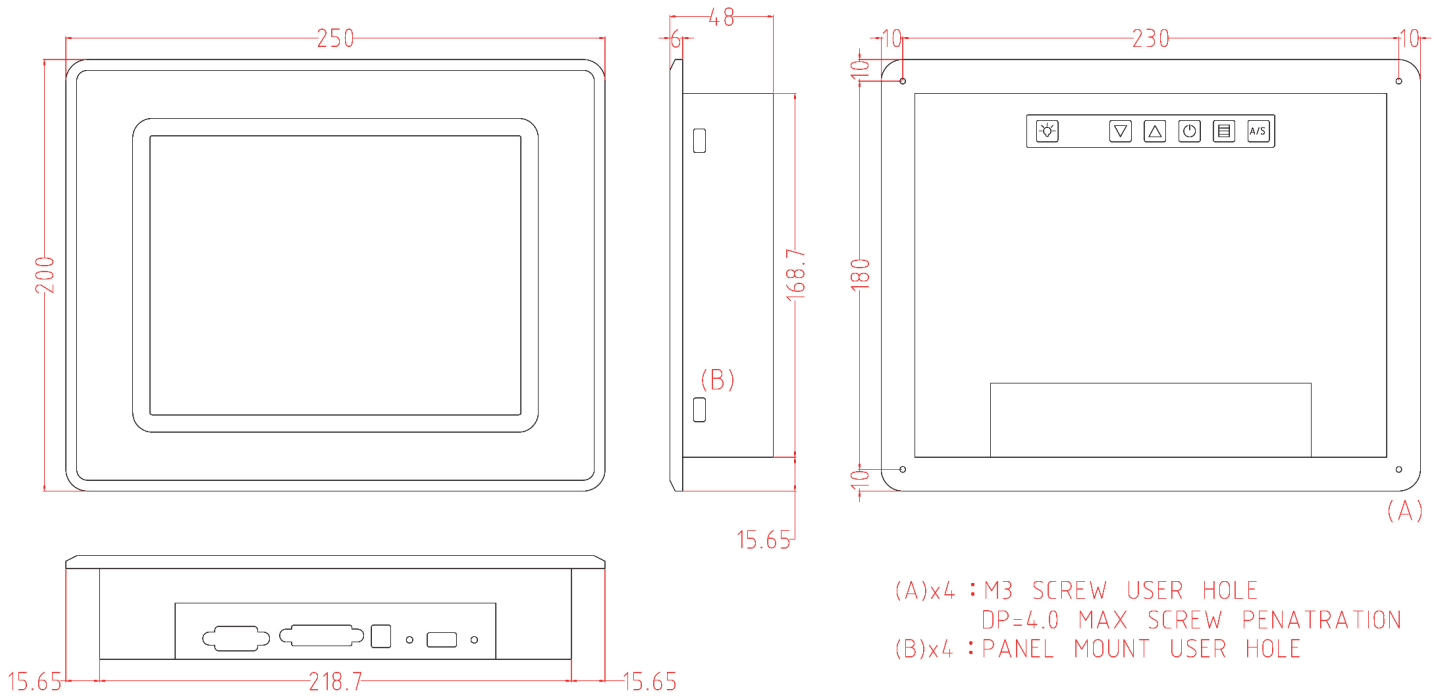

## Installation Guide for Panel Mount Product:

You better have at least 2 people to do the installation. One is at the front side of the mounting wall, another is at the back side of the mounting wall.

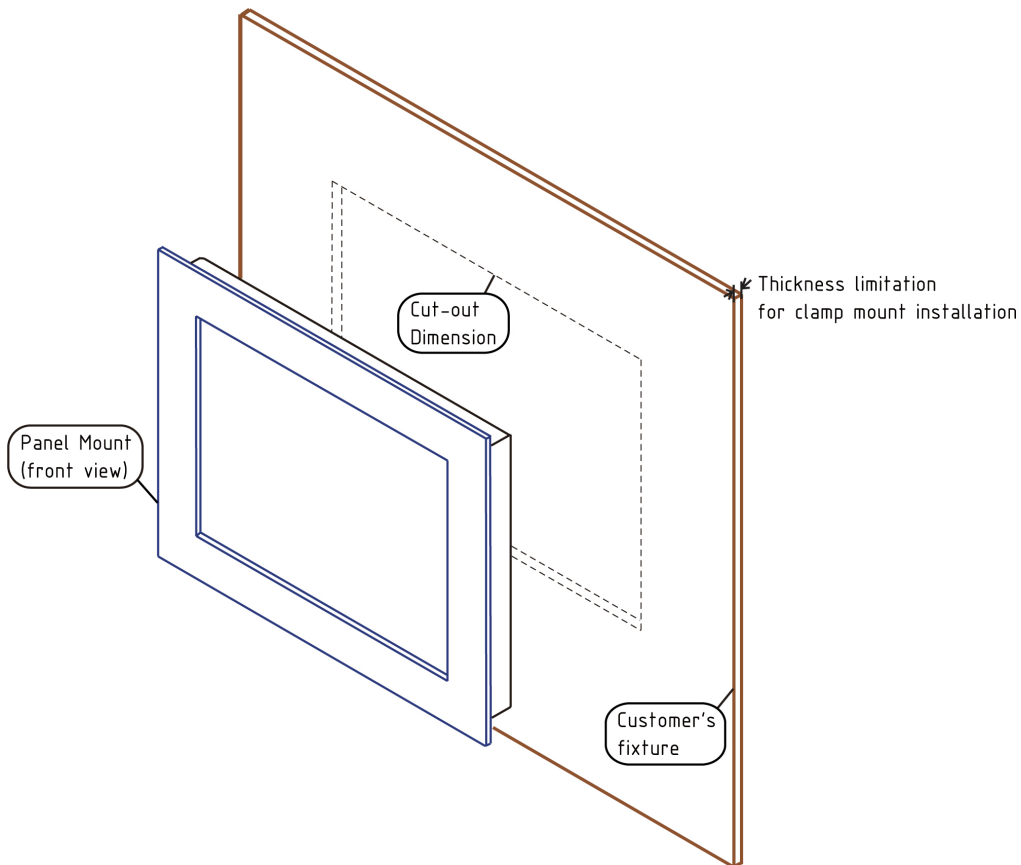

### 1. Get the Mechanical Drawing :

You can get the mechanical drawing of your product model from our web site : [www.itechlcd.com](http://www.itechlcd.com) . If you can't find the correct mechanical drawing, contact your local dealer.

### 2. Make the cut out :


There is the cut out dimension in the Mechanical Drawing. Make sure your cut out meet the cut out dimension requirement. If the cut out is too small, there will be some interference. If the cut out is too big, you can't have the panel mounting securely. Please note that there is thickness limitation of the mounting wall for panel mount installation.

### 3. Prepare the accessory :

For panel mounting kit installation, you will receive mounting kits and screws together with your unit and you have to prepare the screw driver by yourself. There are at least 2 mounting kits for each side of the panel. The mounting kit and the screw is paired.

### 4. Installation :

4-1. Put the monitor in the cut out from the front side of the mounting wall. The best way to mount the panel is to align the bottom of the panel housing with the bottom edge of the cut out. This way can help hold the panel steadily.

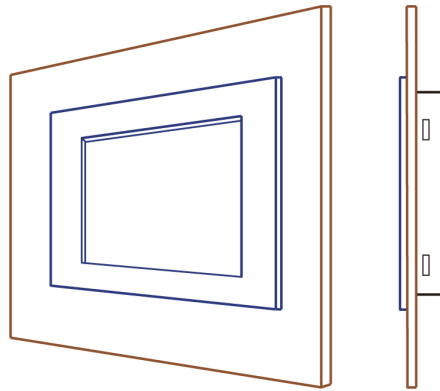

- 4-2. At the back side of the mounting wall, insert the mounting kits into the side hole at the side bracket on the panel.
- 4-3. Put the screw on the mounting kits and screw it tightly.
- 4-4. Finish all the mounting kits one by one then you can have a secure installation for your Panel Mount product.

