

Industrial IP65 Panel Mount LCD

Industrial LCD Monitor - with Aluminum Front Bezel

IP65/NEMA4 Wide Temp Panel Mount (Aluminum-6mm), 17" LCD monitor, 1280 x 1024, 1500 nits LED VGA + DVI Input, Rear OSD, including rear Clamp mount / VESA Mount. Integrated with E107261 6mm Secure touch USB Controller



1500 nits

Model: YPM1700PHB2-ETS

FEATURES:


- High Brightness.
- LED Backlight.
- 17.0" SXGA TFT with resolution up to 1280 x 1024.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.
- Front Bezel IP65 (with glass or touch)
- Construction Front Panel : High quality aluminum bezel (anodic treatment)

System Specifications

Active Display Area (mm)	337.920(H) x 270.336(V)
Display Resolution (pixel)	SXGA (1280 x 1024)
Pixel Pitch (mm)	0.264 x 0.264
Display Color	16.7M (RGB 6-bit + HiFRC data)
Viewing Angles (CR≥10)	85/85/80/80 (R/L/U/D)
Contrast Ratio	1000:1 (typ.)
Brightness (cd/m ²)	1500 (typ.)
Response Time (msec)	5 (typ.)
Backlight Unit	LED
Power Source	AC 100~240V, Universal
Signal Connector	15 pin D-sub, DVI-D
Optional Touch Screen	Resistive


Touch Screen (Optional) N: No touch screen or glass. G: Glass (AR Coating). R: 5-Wires Resistive, RS232. U: 5-Wires Resistive, USB A: 3M Microtouch capacitive, RS232. B: 3M Microtouch capacitive, USB.	Signal Input C: VGA only. D: VGA + DVI-D. E: VGA + DVI-D + Audio. J: VGA + DVI-I + Audio HDMI	Color B: Black S: Silver	Other N: N/A P: Panel mount kits.
---	---	---------------------------------------	--

Clamp Mount

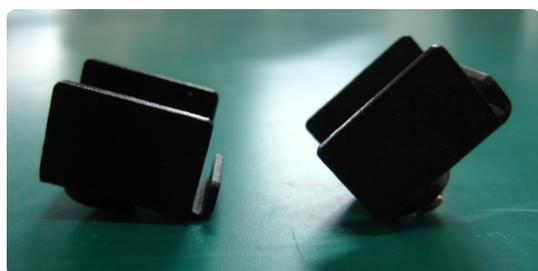


Mechanical Drawing:

Unit: mm

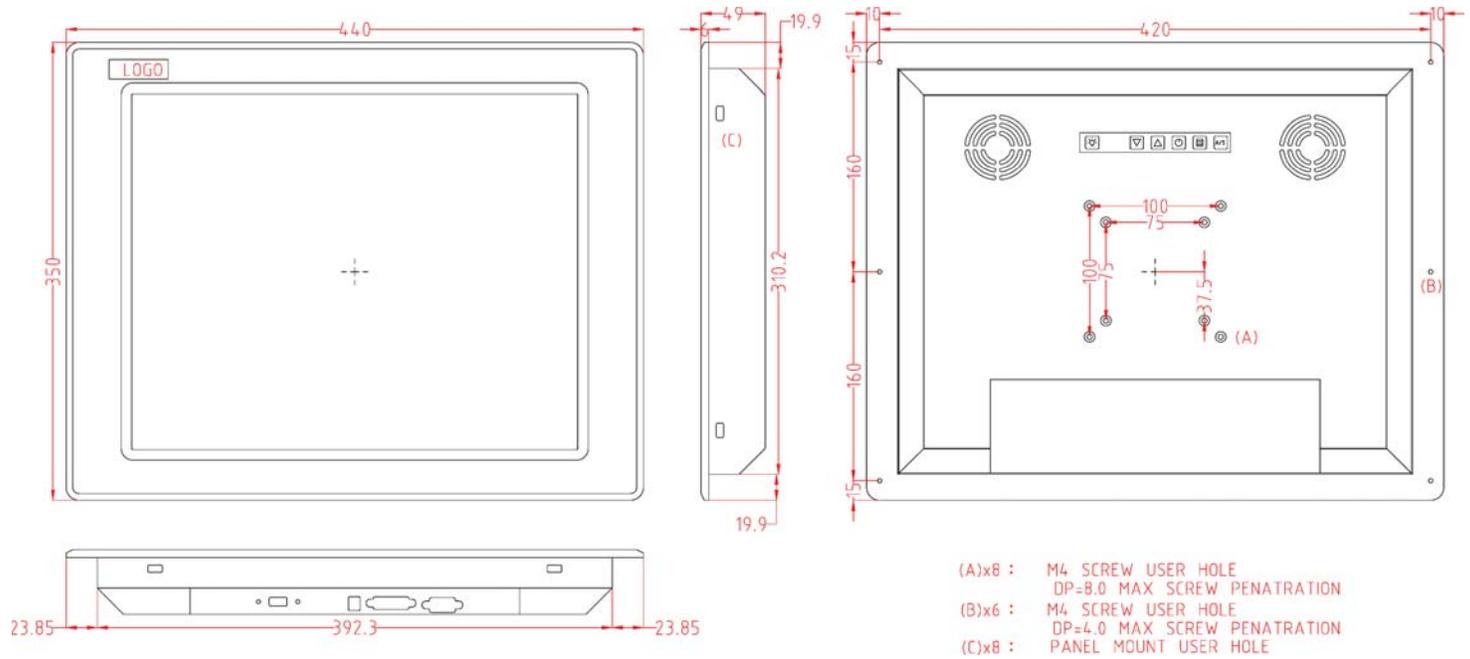

Installation Guide for Panel Mount Product:

You better have at least 2 people to do the installation. One is at the front side of the mounting wall, another is at the back side of the mounting wall.

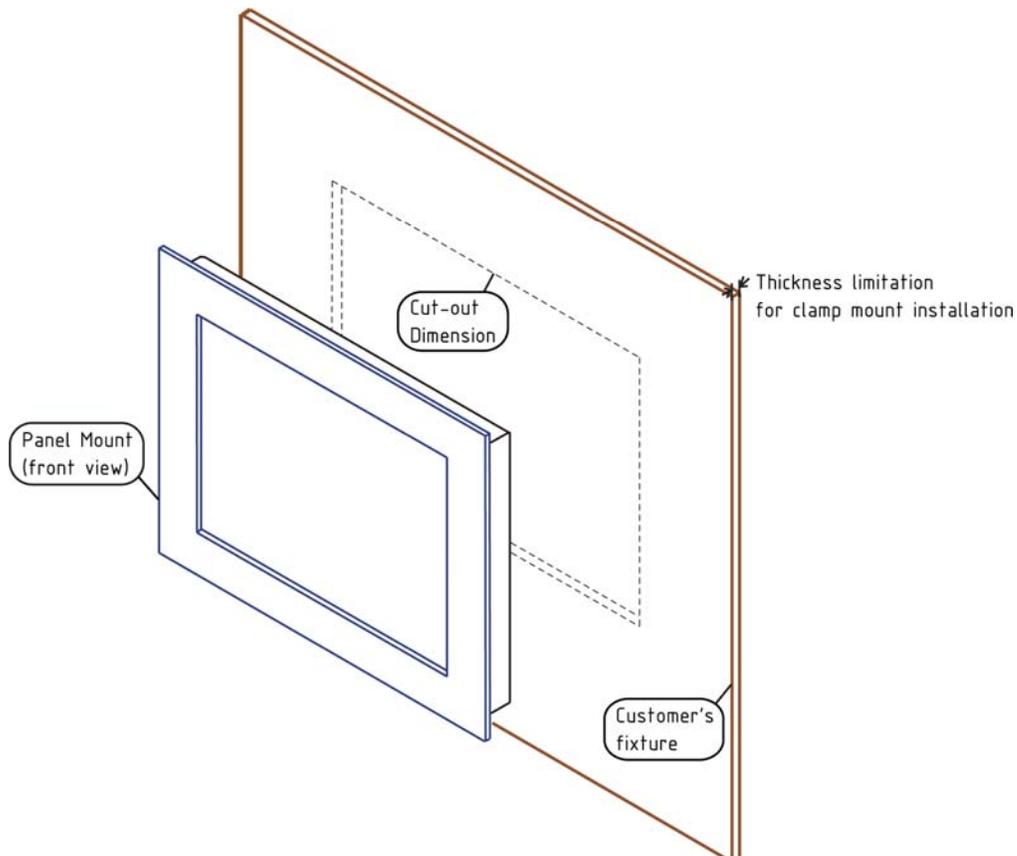

1. Get the Mechanical Drawing :

You can get the mechanical drawing of your product model from our web site : www.itechlcd.com . If you can't find the correct mechanical drawing, contact your local dealer.

2. Make the cut out :


There is the cut out dimension in the Mechanical Drawing. Make sure your cut out meet the cut out dimension requirement. If the cut out is too small, there will be some interference. If the cut out is too big, you can't have the panel mounting securely. Please note that there is thickness limitation of the mounting wall for panel mount installation.

3. Prepare the accessory :

For panel mounting kit installation, you will receive mounting kits and screws together with your unit and you have to prepare the screw driver by yourself. There are at least 2 mounting kits for each side of the panel. The mounting kit and the screw is paired.

4. Installation :

4-1. Put the monitor in the cut out from the front side of the mounting wall. The best way to mount the panel is to align the bottom of the panel housing with the bottom edge of the cut out. This way can help hold the panel steadily.

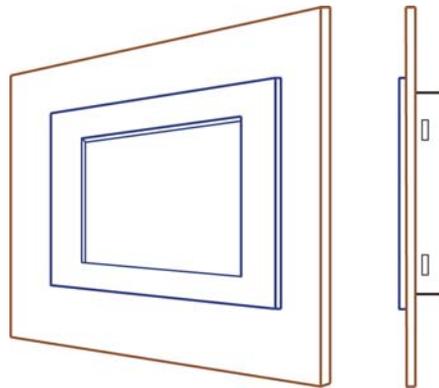

- 4-2. At the back side of the mounting wall, insert the mounting kits into the slide hole at the side bracket on the panel.
4-3. Put the screw on the mounting kits and screw it tightly.
4-4. Finish all the mounting kits one by one then you can have a secure installation for your Panel Mount product.

