

INDUSTRIAL IP66 PANEL MOUNT LCD

Industrial LCD Monitor with Aluminum Front Bezel

19" (5:4) / 1280x1024 / 1500nits/Front 6mm Aluminum bezel / Front IP66 /
VGA+DVI+HDMI input / Panel Mount / VESA Mount / Rear Mount / DC 12V input /
PCAP Touch with USB controller (10 points in Windows7, 10) Consumption is 25W,
Operating temp and storage -30 ~ 85C



Model: YPM1900HB2TF

FEATURES:



- 19.0" SXGA TFT LCD with resolution up to 1280 x 1024.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.
- Front Bezel IP66 (with glass or touch)
- Construction Front Panel : High quality aluminum bezel (anodic treatment)

System Specifications

Display Type	19.0" TFT-LCD
Panel	
Display Color	16.7M colors
Brightness (cd/m ²)	1500nits
Display Resolution (pixel)	SXGA(1280 x 1024)
Viewing Angles (CR≥10)	85/85/80/80
Contrast Ratio	1000 : 1
Backlight Unit	LED
Response Time (msec)	5ms
Environmental	
Temperature	
Operation	-30°C~85°C
Storage	-30°C~85°C
Touch	True Flat PCAP Touch with USB controller (10 points in Windows 7, 10)


Touch Screen (Optional) N: No touch screen or glass. G: Glass (AR Coating). R: 5-Wires Resistive, RS232. U: 5-Wires Resistive, USB A: 3M Microtouch capacitive, RS232. B: 3M Microtouch capacitive, USB.	Signal Input C: VGA only. D: VGA + DVI-D. E: VGA + DVI-D + Audio. J: VGA + DVI-I + Audio HDMI	Color B: Black S: Silver	Other N: N/A P: Panel mount kits.
---	---	---------------------------------------	--

Clamp Mount

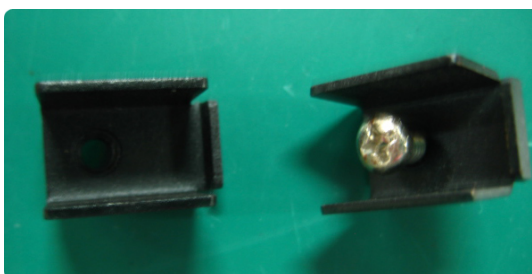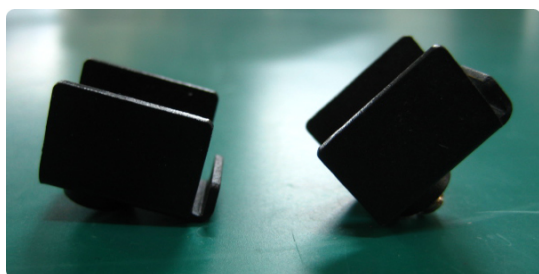


Mechanical Drawing:

Unit:mm

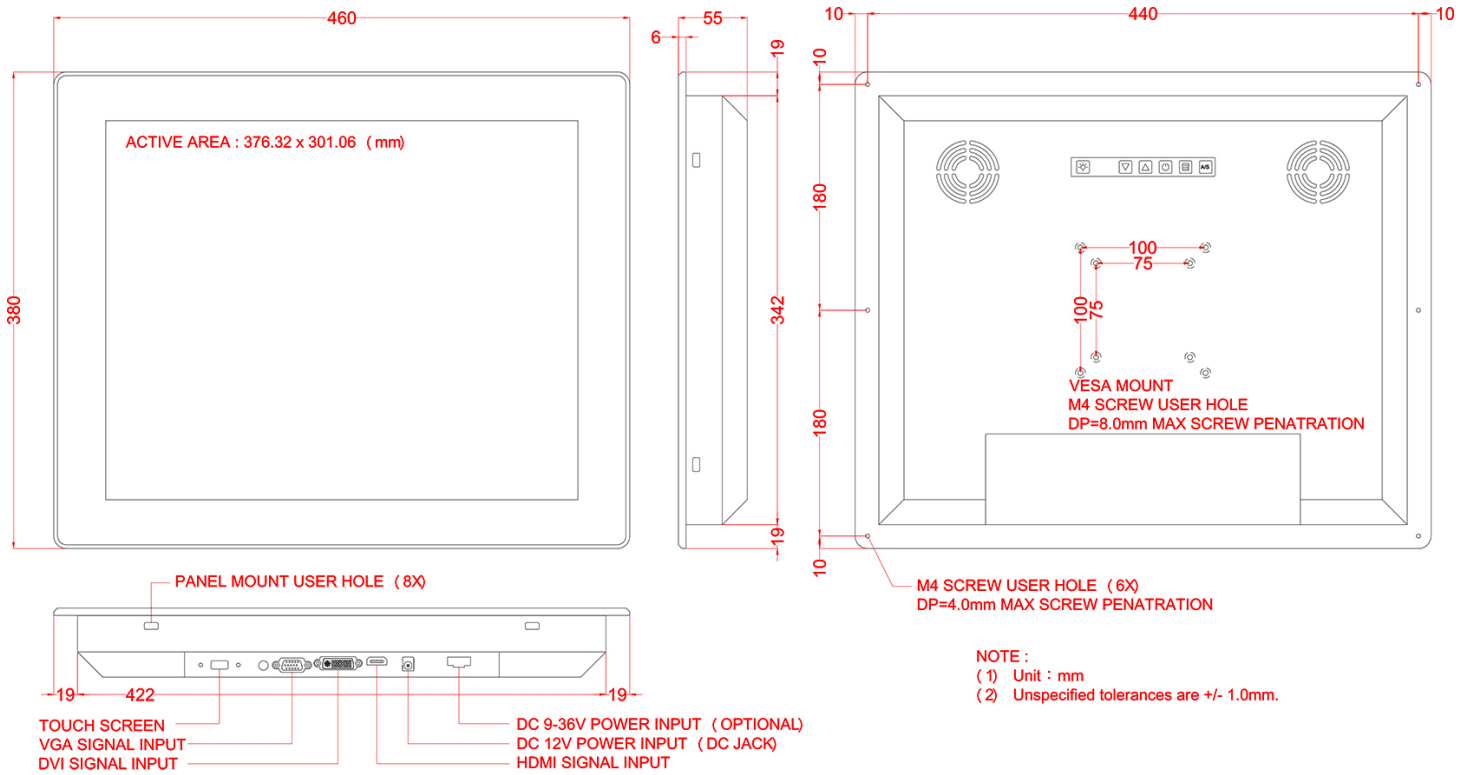

Installation Guide for Panel Mount Product:

You better have at least 2 people to do the installation. One is at the front side of the mounting wall, another is at the back side of the mounting wall.

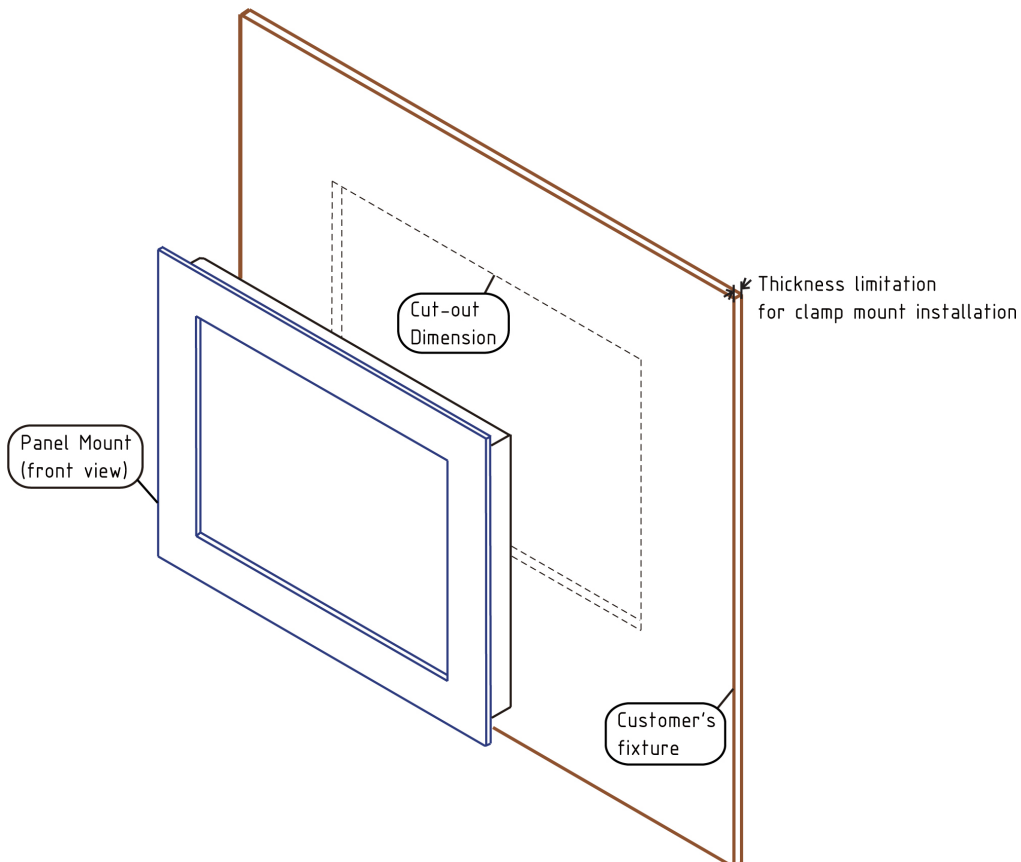

1. Get the Mechanical Drawing :

You can get the mechanical drawing of your product model from our web site : www.itechlcd.com . If you can't find the correct mechanical drawing, contact your local dealer.

2. Make the cut out :


There is the cut out dimension in the Mechanical Drawing. Make sure your cut out meet the cut out dimension requirement. If the cut out is too small, there will be some interference. If the cut out is too big, you can't have the panel mounting securely. Please note that there is thickness limitation of the mounting wall for panel mount installation.

3. Prepare the accessory :

For panel mounting kit installation, you will receive mounting kits and screws together with your unit and you have to prepare the screw driver by yourself. There are at least 2 mounting kits for each side of the panel. The mounting kit and the screw is paired.

4. Installation :

4-1. Put the monitor in the cut out from the front side of the mounting wall. The best way to mount the panel is to align the bottom of the panel housing with the bottom edge of the cut out. This way can help hold the panel steadily.

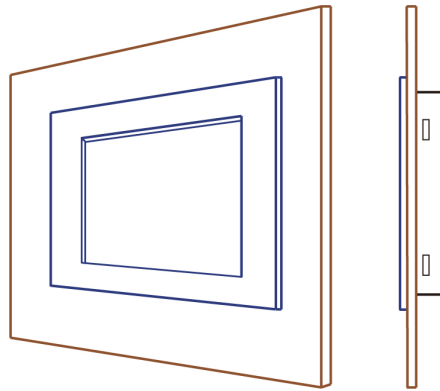

- 4-2. At the back side of the mounting wall, insert the mounting kits into the side hole at the side bracket on the panel.
- 4-3. Put the screw on the mounting kits and screw it tightly.
- 4-4. Finish all the mounting kits one by one then you can have a secure installation for your Panel Mount product.

