

FRONT IP65 MARINE BRIDGE DISPLAY MONITOR



**Front IP65 15" Marine Bridge Display Monitor 1027x768 450nits, VGA+DVI+HDMI+AV
IEC60945 Certificated Front Hyper Dimming Knob Control
Backlight Brightness from nearly 0%-100% Internal Power Adapter, 100-240V AC Input**

Model: AMAR1500

FEATURES:

- Front hyper dimming knob control backlight brightness from nearly 0%-100%.
- Rugged construction, Front bezel NEMA4 / IP65 compliant.
- Front hardness glass protect screen (AR glass & touch for optional).
- Front OSD Control buttons to optimized display.
- Build in 2x 2watts stereo speakers.
- Standard with HDMI, DVI, VGA, Composite Video, Audio input.
- Panel (Flush) mount with clips.
- Meet standard VESA mount and optional robust mounting bracket.
- IEC60945 certificated

SPECIFICATION:

TFT Characteristics	
Screen Size	15 inch TFT LCD
Backlight Type	LED
Resolution	1024x768
Contrast Ratio	700:1
Brightness (cd/m2)	450 (high brightness 1000 cd/m2 for option)
View Angles (H/V)	160/140
Max. Color	16.7M

Input Signals	
HDMI Signal	HDMI (Female)
DVI Signal	DVI-D (Female)
VGA Signal	D-SUB 15P connector (Female)
Composite Video	RCA Phono plug
Audio	3.5" jack
AC Power Input	Standard IEC Inlet
DC Power Input (option)	Screw Terminal Block
Touch Screen (option)	USB-A or D-SUB 9P connector (Female)

User Controls	
Power On/Off via front buttons	
VR Brightness Knob adjustment	
Power Mode Status LED indicator	
On Screen Display control(OSD)	
OSD Remote Control via RS-232 (option)	

***Specifications subject to change without notice, not responsible for typographical errors.**


Power Specifications	
AC Power Input	Standard IEC Type power cord with Internal Power Adapter , 100-240V AC Input
DC Power Input (option)	Screw Type Terminal Block with internal isolate DC 12V/24V/48V/125V power module

Mechanical and Environmental:	
IP Protect	Front IP65 Grade
Mounting	Panel (Flush) Mount, VESA Mount, Robust Bracket, Sun-visor Bracket
Construction	Aluminum Front Bezel + Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	395 x 355 x 70mm
Packing Dimension (WxHxD)	530 x 490 x 220mm
Net Weight / Gross Weight	7.5 / 10 KGs
Certification and Approvals	CE / FCC / RoHs / IEC60945

Available Options	
Touch Screen	Resistive, Projected capacitive touch
AR Hardness Glass	3mm Anti-Reflective Protect Glass
DC Power	Isolate 12V/24V/48V/125V DC Power
Stand & Roof Mounting Bracket	
Rotary Plate Robust Bracket	
Sun-Visor Bracket	

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

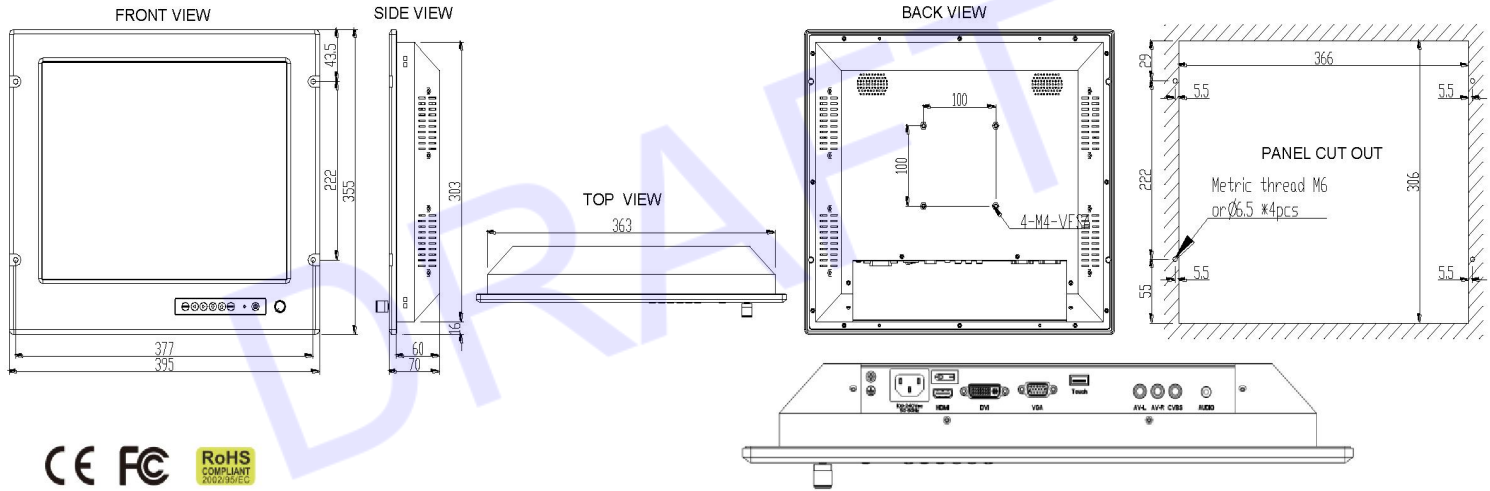

Drawing no.: AMAR1500-09142023-V1