

# Front IP65 Marine Bridge Display Monitor



Front IP65 19" Marine Bridge Display Monitor 1280 x 1024 1000nits, HDMI, VGA, composite video, audio input, IEC60945 certificated Front hyper dimming knob control backlight brightness from nearly 0%-100% Internal Power Adapter , 100-240V AC Input (Model: AMAR1900)

## Features:








- Front hyper dimming knob control backlight brightness from nearly 0%-100%.
- Rugged construction, Front bezel NEMA4 / IP65 compliant.
- Front hardness glass protect screen (AR glass & touch for optional).
- Front osd control buttons to optimized display.
- Build in 2x 2watts stereo speakers.
- Support PIP & POP function.
- Standard with HDMI, VGA, Composite Video, Audio input.
- Panel (Flush) mount with clips.
- Meet standard VESA mount and optional robust mounting bracket.
- IEC60945 certificated

## Specification:

<b>TFT Characteristics</b>	
Screen Size	19 inch TFT LCD
Backlight Type	LED
Resolution	1280x1024
Contrast Ratio	1000:1
Brightness ( cd/m2 )	1000
View Angles ( H/V )	170/160
Max. Color	16.7M
MTBF (Hrs. )	50,000
<b>Input Signals:</b>	
HDMI Signal	HDMI
VGA Signal	D-SUB 15P connector ( Female )
Composite Video	RCA Phono plug
Audio	3.5" jack
AC Power Input	Standard IEC Inlet
DC Power Input ( option )	Screw Terminal Block
Touch Screen ( option )	USB-A or D-SUB 9P connector (Female)
RS-232 Remote (option)	D-SUB 9P connector ( Female )
<b>User Controls</b>	
Power On/Off via front buttons	
VR Brightness Knob adjustment	
Power Mode Status LED indicator	
On Screen Display control(OSD)	
OSD Remote Control via RS-232 ( option )	

<b>Power Specifications</b>	
AC Power Input	Standard IEC Type power cord with Internal Power Adapter , 100-240V AC Input
DC Power Input ( option )	Screw Type Terminal Block with internal isolate DC 12V/24V/48V/125V power module
<b>Mechanical and Environmental</b>	
IP Protect	Front IP65 Grade
Mounting	Panel ( Flush ) Mount, VESA Mount, Robust Bracket, Sun-visor Bracket
Construction	Aluminum Front Bezel + Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension (WxHxD)	483 x 444 x 70mm
Packing Dimension (WxHxD)	620 x 580 x 220mm
Net Weight / Gross Weight	9.5 / 13 KGs
Certification and Approvals	CE / FCC / RoHs / IEC60945
<b>Available Options</b>	
Touch Screen	Resistive, Capacitive, SAW, IR Touch
AR Hardness Glass	3mm Anti-Reflective Protect Glass
DC Power	Isolate 12V/24V/48V/125V DC Power
SR-BKT	Stand & Roof Mounting Bracket
RT-BKT	Rotary Plate Robust Bracket
SV-BKT	Sun-Visor Bracket

**Mechanical Drawing:**

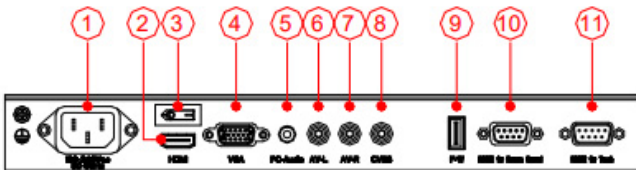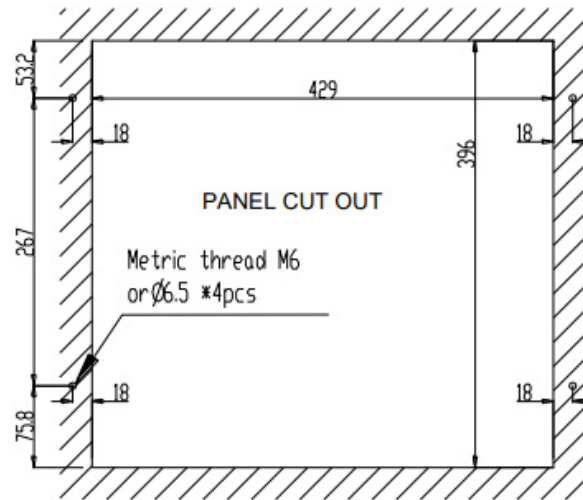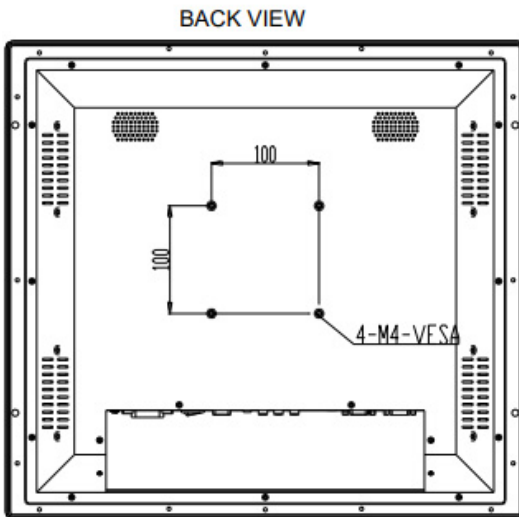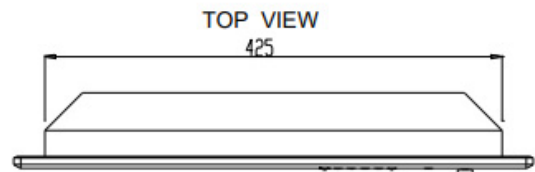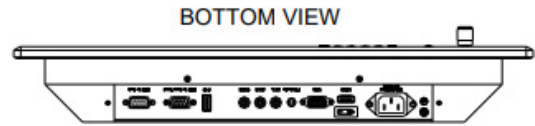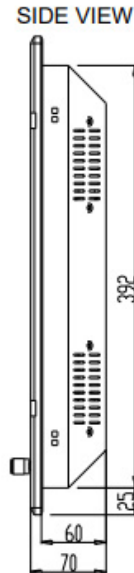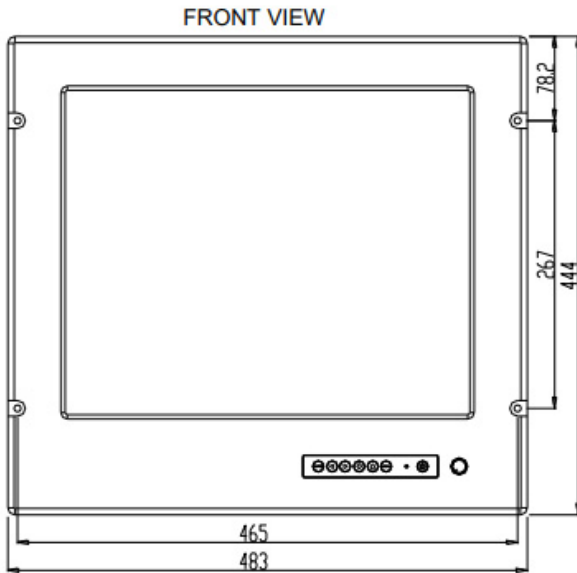

- |              |                               |
|--------------|-------------------------------|
| 1 . AC Inlet | 7 . AV-R                      |
| 2 . HDMI     | 8 . CVBS                      |
| 3 . Power sw | 9 . F/W                       |
| 4 . VGA      | 10 . RS232 for Remote control |
| 5 . PC-Audio | 11 . RS232 for Touch          |
| 6 . AV-L     |                               |