

Touch Panel PC IP65 Dust & Water Proof Display Front

21.5" Chassis/Surface Mount All in One PC Front IP65 Proof Wide LCD Touch Panel (Resistive)

Model: AOPC2150C2D




AOPC series is an advanced metal panel PC. Its ultra slim and exquisite metal enclosure is very eye appealing, especially framing in at 21.5". Equipped with high brightness TFT panel and resistive touch, the AOPC is also NEMA 4/IP 65 dust and water proof – meeting industrial application requirements.

AOPC series also derives multiple variations for cabinet designs – such as whole color, painted sheet, metal housing, complete stainless steel cabinet, and panel mount models. Other options include fanless and ventless or vandal proof designs. The AOPC series fit into various application settings with desktop stand, MSR, laser scanner and camera kits.

Features:

- Ultra slim, 60 mm thickness.
- Rugged metal housing and NEMA 4 / IP 65 dust & water proof display front.
- Intel mobile technology supports high performance Core 2 Duo processor.
- Rich I/O ports provide excellent peripheral connectivity.
- Optional Accessories: MSR
- Slim HDD bay design for easy service

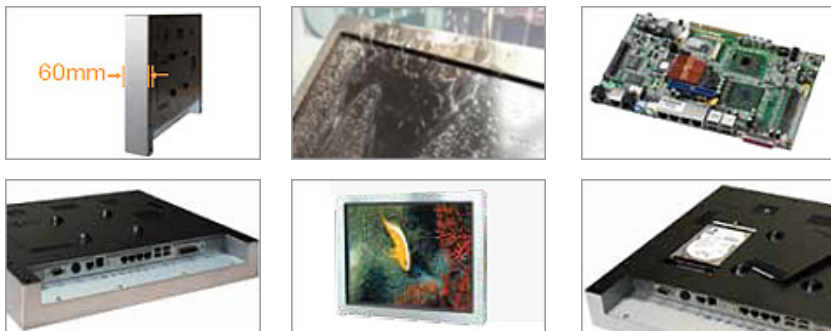

Specifications:

Processor:	Intel® Core 2 Duo 1.66GHz
Chipset:	Intel® 945GME + ICH7M
System Memory:	1GB DDR2-SODIMM
Graphic Memory:	Share system memory up to 224MB
LCD Touch Panel:	LCD Size : 21.5" TFT LCD Resolution : 1920x1080 Brightness (typ.) : 250 nits Touch Screen : Resistive
Audio:	Speaker : 2 x 3W Speaker
Storage Device:	Hard Drive : 2.5" 160 GB, SATA HDD
Expansion:	Mini PCI Slot : 1 x support 802.11 a/b/g WLAN card
Rear I/O:	USB Port : 4 x USB 2.0 Type A Serial Port : RJ-45 (COM1 standard RS-232; COM2 RS-232 / 422 / 485 selectable by jumper; COM3 & COM4 pin 9 with 5V or 12V power by jumper) LAN Port : 1 x RJ-45 (10/100/1000Mbps Giga LAN) VGA output Port : 1 x VGA Cash Drawer Port : Support cash drawer 1 x (12V / 24V) Parallel Port : 1 x D-sub 25F Audio Jack : 1 x Mic-in, 1 x Line-out
Power:	Power : Power Adapter (DC 90W, 19V, 4.7A)
Certificate:	EMC & Safety : FCC Class A / CE Mark / LVD
Environment:	Operating Temperature : 0°C ~ 40°C (32°F ~ 104°F) Storage Temperature : -20° ~ 60°C (-4°F ~ 140°F) Operating Humidity : 5% - 95% RH non-condensing Storage Humidity : 5% - 95% RH non-condensing Dust and Water Proof : NEMA 4 / IP65 (front)
Optional Expansion:	Wireless LAN : Mini PCI-E wireless LAN card 802.11 b/g (optional)
Dimension (W x D x H):	22" x 2.8" x 14.2"
Weight:	N.W. = 28.6 lbs G.W. = 30.8 lbs
Mounting:	100mm x 100mm Standard VESA
OS Supported:	Windows® XP Pro, Linux, POSReady 2009, Windows® Vista, Windows® 7
Notes:	Product specifications are subject to change without prior notice.



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com