

10.1" WXGA fanless HMI with Atom N2600 1.6G CPU, 2GB DDR3 RAM, 32G SSD, Projected Capacitive touch, 9~36VDC input with adapter, Aluminum chassis.

APCW1010P-AT



FEATURES:

- Variety of LCD Panel Size Selections
- Flat Front Panel with IP65 Design
- Solid Aluminum Die-casting Chassis
- Intel Atom N2600 processor, Dual Core Low Power Fanless System

SPECIFICATION:


SYSTEM		TOUCHSCREEN (option)	
Processor	Intel Atom Cedar View N2600 1.6GHz Dual Core Processors / Intel Atom D2550 1.8GHz (Optional)	Type	Resistive Touch / Projected Capacitive Touch (for P model)
System Memory	Onboard DDR3 2GB 800 MHz	Light Transmission	80% / 90% (for P model)
System Chipset	Intel NM10	Interface	RS-232 / USB (for P model)
Power Consumption	11.04W	POWER SUPPLY	
IO Port		Power Input	9~36V DC
USB	2 x USB 2.0 type A, USB4/5	MECHANICAL	
Serial/Parallel	x RS-232/422/485 DB-9, COM1, Default RS-232 1 x RS-232 DB-9, COM2	Construction	Sliver aluminum front bezel and chassis
Audio	1 x Line out phone jack	IP Rating	IP65 front panel
LAN	2 x GbE RJ-45	Mounting	Panel mounting, VESA 100 x 100
Power	3 pins terminal block connector, DC Power input	Dimension	285mm x 189mm x 48.9mm
Storage Space		Net Weight	2
HDD	1 x 2.5" SATA 2	ENVIRONMENTAL	
Movable device	x Internal SD slot	Operating Temperature	0~50 OC
Expansion		Storage Temperature	-20~60 OC
On board expansion bus	1 x Mini-PCIe half size	Storage Humidity	10 to 90% @ 40°C, non-condensing
Display		Certificate	CE / FCC Class A
Display Type	10.1" TFT-LCD	Operating System Support	
Max. Resolution	1280x800	Windows XP pro Windows XP Embedded Windows Embedded CE6.0 Windows 7 pro for Embedded Windows Embedded standard 7 (Win 7 support 3D Graphic function)	
Max. Color	262k		
Brightness	350		
View Angle	H:160° / V:160°		



PHOTO GALLERY:



DIMENSION:

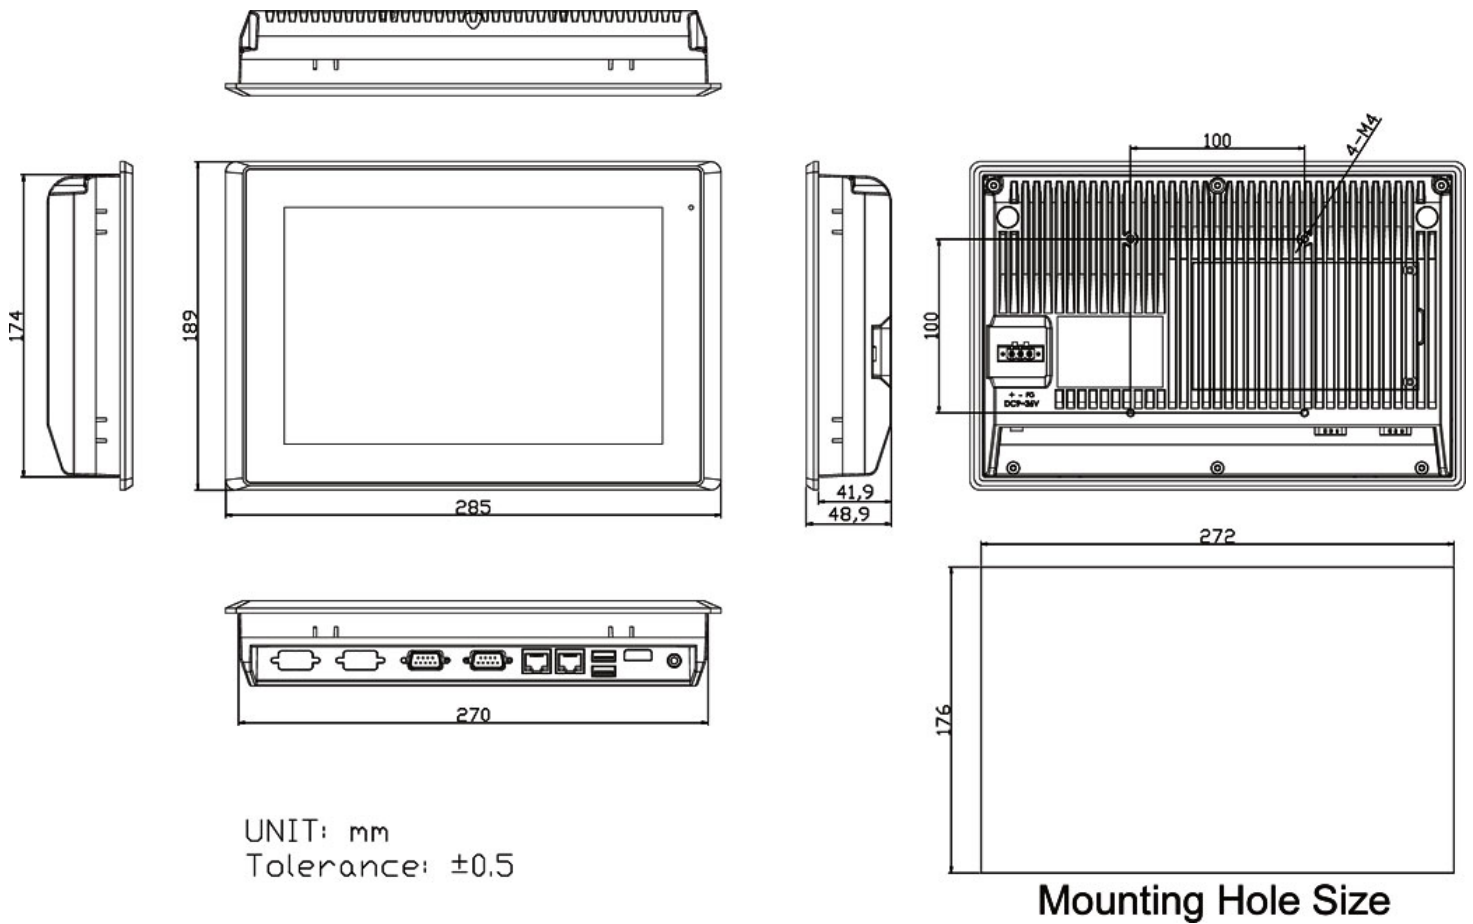

UNIT: mm
Tolerance: $\pm 0,5$