


2U Rackmount Dual LCD Drawer [Screen Pivot]

2U 24" 1920 x 1200 widescreen Dual LCD Rackmount LCD Drawer, 2 x DVI & VGA Port, Self-locking and auto release rails for ultra convenience and built in speakers, 762mm. 30" deep.

Model: ARP2D2400

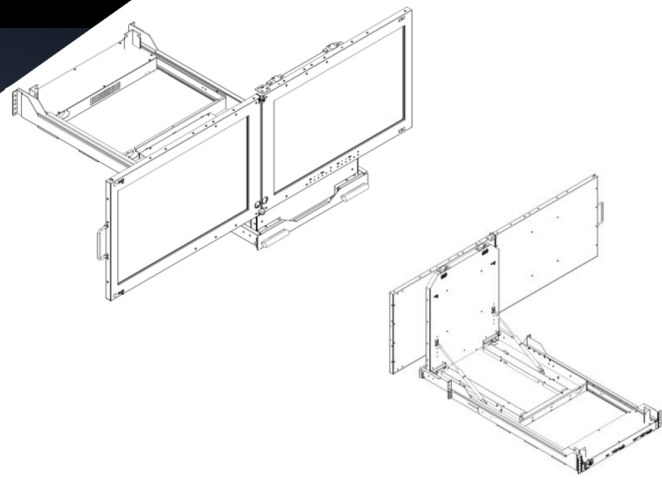

FEATURES:

- 2U foldable dual 24.1" widescreen LCD display Drawer
- Dual DVI & VGA Port
- native 1920 x 1200 WUXGA Ultra high resolution (for 24.1")
- Build in 2x 2 watts speakers
- Independent front osd control buttons to optimized display

OPTIONS:

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

SPECIFICATIONS

Screen Size	Dual 24.1"
Backlight Type	LED
Native Resolution	1920 x 1200
Contrast Ratio	1000:1
Brightness (cd/m2)	300
View Angles (H/V)	178/178
Pixel Size (HxV) mm	0.27x0.27
Max. Color	16.7M

Input Signals


DVI-D	Dual DVI-D 24Pin Connector (Female)
VGA	Dual D-SUB 15Pin Connector (Female)
Audio	1x 3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB (option)	Dual USB A Type connector
Touch-RS232 (option)	Dual D-SUB 9P connector (Female)

Power Specifications

AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC
Wide Range DC PowerInput (option)	Screw Type Terminal Block with internal wide Range DC 9-36V power module

User Control Interface	
Power ON / OFF via Front Button	
Power Mode Status LED indicator	
OSD (On Screen Display) Buttons	

Mechanical and Environment	
Height	2U Foldable
Rack Depth	30" to 40" (cabinet front rear rail)
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	10% - 90% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension	443 x 88 x 762 (mm)
Packing Dimension	(mm)
Net Weight / Gross	(KGs)
Certification and	CE / FCC / RoHs

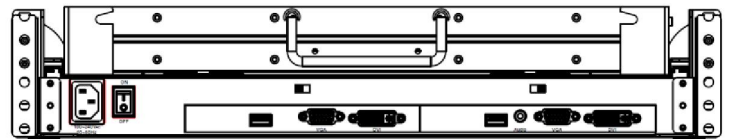

MECHANICAL DRAWINGS

