


# Rack Mount Triple LCD Display Drawer (Screen Pivot)

2.5U 21.5" 1920 x 1080 Widescreen Triple LCD Rackmount LCD Drawer 3 x DVI & VGA Port, Self-locking and auto release rails for ultra convenience and built in speakers, 762mm. 30" deep.

**Model: ARP3DW2150**

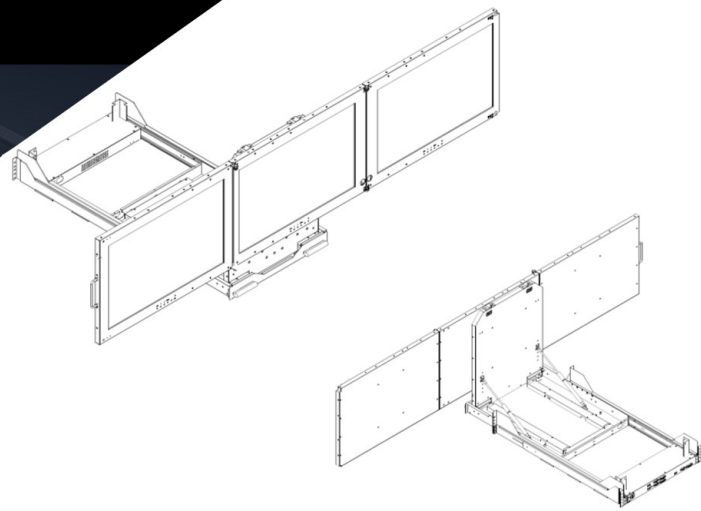

## FEATURES:

- 2.5U foldable triple 21.5" widescreen LCD Display Drawer
- Triple DVI & VGA Port
- native 1920 x 1080 FHD resolution
- Build in 2x 2 watts speakers
- Independent front osd control buttons to optimized display

## OPTION:

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

## SPECIFICATIONS


LCD Characteristics :	
Screen Size	Triple 21.5"
Backlight Type	LED
Resolution	1920*1080
Contrast Ratio	1000:1
Brightness ( cd/m2 )	250
View Angles ( H/V )	178/178
Pixel Size ( HxV ) mm	0.2745x0.2745
Max. Color	16.7M

Input Signals:	
DVI-D	Triple DVI-D 24Pin Connector (Female)
VGA	Triple D-SUB 15Pin Connector (Female)
Audio	1x 3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB ( option )	Triple USB A Type connector
Touch-RS232 ( option )	Triple D-SUB 9P connector ( Female )

Power Specifications :	
AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC
Wide Range DC PowerInput ( option )	Screw Type Terminal Block with internal wide Range DC 9-36V power module

User Controls Interface:	
Power ON / OFF via Front Button	
Power Mode Status LED indicator	
OSD ( On Screen Display ) Buttons	

Mechanical and Environment:	
Height	2.5U Foldable
Rack Depth	30" to 40" ( cabinet front rail to rear rail )
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	10% - 90% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension	443 x 111x 768 (mm)
Packing Dimension	mm
Net Weight / Gross	(KGs)
Certification and	CE / FCC / RoHs

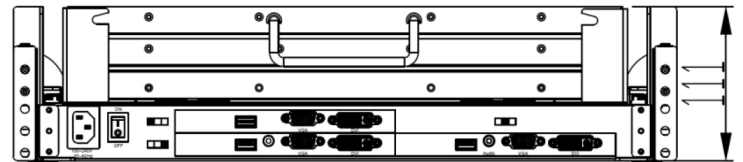

**DRAWINGS:**

