

Combo DB15 LCD Console Drawers

21.5" FHD LCD Console Drawer
with GA-USB and VGA-PS/2 Combo Interface

Model: ASK2150S



i-Tech range of LCD console drawers provides a variety of features that simplify to access servers to making system monitoring, troubleshooting and software upgrades. The self-locking rails when in the fully extended open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle free operation. Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, combo DB15 single, 8 or 16 port integrated KVM switch & with an option remote IP console.

FEATURES:


- Facilitated by screen rotate function.
- Support combo interface, GA-USB & VGA-PS/2.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 240 servers.
- Access Control List (ACL) security function for up to 8 independent user accounts.

Optional Remote IP Access


- An expansion slot allows you to add an optional KVM over IP module to enable remote access to your servers.
- Gain BIOS level access to your servers for system maintenance, support or failure recovery via secure SSL authentication and encryption.



1 port



8 ports



16 ports

SPECIFICATIONS

| | ASK2150S | ASK2150S-S8e | ASK2150S-S16e |
|---|--|---|------------------------------------|
| Direct no. of Computers | 1 | 8 | 16 |
| Maximum no. of Computers | 1 | 232(Daisy Chain) | 240(Daisy chain) |
| LCD | Size | 21.5" | |
| | Backlight | LED | |
| | Resolution | 1920*1080 FULL HD (support up to 1920*1200) | |
| | Max.color | 16.7M | |
| | Luminance | 250cd/m2 | |
| | View Angel (H/V) | 178 / 178 | |
| | Contrast Ratio | 3000 : 1 | |
| Port Selection | N/A | Push Button, OSD or Hotkey | |
| Expansion Slot | N/A | Yes, option for Remote IP Access | |
| KB/Mouse Emulation | USB & PS2 | | |
| Rack Depth | 600mm to 1300mm (rack cabinet front rails to rear rails) | | |
| Power | 100-240V AC 50/60Hz via IEC Type power cord | | |
| Environment | Operation temp: 0 to 50°C Storage temp: -20 to 60°C Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP | | |
| Physical Dimensions / Net Weights | 448 x 44 x 790mm (WxHxD) / 19.5KG | | |
| Packing Dimensions / Gross weights | 580 x 195 x 940mm (WxHxD) / 23KG | | |
| Accessory | 1.8meter IEC Type Power Cord (1.8meter VGA& PS2Cable + 1.8meter USB A Type Cable for ASK2400S) | | |
| Option Relate Item | | | |
| AB-6 | 1.8meter 2-in-1 KVM Cable-USB&VGA | AD-6 | 1.8meter 3-in-1 KVM Cable-PS/2&VGA |
| AB-10 | 3.0meter 2-in-1 KVM Cable-USB&VGA | AD-10 | 3.0meter 3-in-1 KVM Cable-PS/2&VGA |
| AB-15 | 5.0meter 2-in-1 KVM Cable-USB&VGA | AD-15 | 5.0meter 3-in-1 KVM Cable-PS/2&VGA |
| AIP-1000M | KVM over IP module for Remote Bios Level Access | | |



Lift the display




Display rotate to the right



Operating position

DRAWINGS:

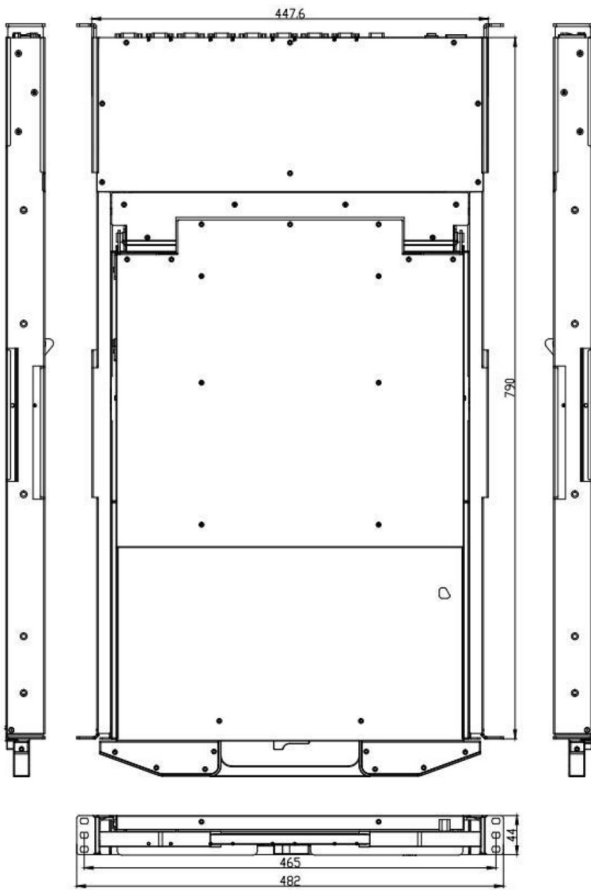

Rear of KVM ASK2150S
(KVM Only)



Rear of KVM ASK2150S-S8e
(KVM Only)



Rear of KVM ASK2150S-S16e
(KVM Only)

