

Combo DB15 LCD Console Drawers

24.1" LCD Console Drawer
with GA-USB and VGA-PS/2 Combo Interface

Model: ASK2400SX



i-Tech range of LCD console drawers provides a variety of features that simplify to access servers to making system monitoring, troubleshooting and software upgrades. The self-locking rails when in the fully extended open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle free operation. Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, combo DB15 single, 8 or 16 port integrated KVM switch & with an option remote IP console.

FEATURES:


- Facilitated by screen rotate function.
- Support combo interface, GA-USB & VGA-PS/2.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 240 servers.
- Access Control List (ACL) security function for up to 8 independent user accounts.

Optional Remote IP Access


- An expansion slot allows you to add an optional KVM over IP module to enable remote access to your servers.
- Gain BIOS level access to your servers for system maintenance, support or failure recovery via secure SSL authentication and encryption.



1 port



8 ports



16 ports

SPECIFICATIONS

		ASK2400SX	ASK2400SX-S8e	ASK2400SX-S16e
Direct no. of Computers		1	8	16
Maximum no. of Computers		1	232(Daisy Chain)	240(Daisy chain)
LCD	Size	24.1"		
	Backlight	LED		
	Resolution	1920 x 1200 Native Resolution		
	Max.color	16.7M		
	Luminance	250cd/m2		
	View Angel (H/V)	178 / 178		
	Contrast Ratio	1000 : 1		
Port Selection		N/A	Push Button, OSD or Hotkey	
Expansion Slot		N/A	Yes, option for Remote IP Access	
KB/Mouse Emulation		USB & PS2		
Rack Depth		600mm to 1300mm (rack cabinet front rails to rear rails)		
Power		100-240V AC 50/60Hz via IEC Type power cord		
Environment		Operation temp: 0 to 50°C Storage temp: -20 to 60°C Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP		
Physical Dimensions / Net Weights		448 x 44 x 790mm (WxHxD) / 19.5KG		
Packing Dimensions / Gross weights		580 x 195 x 940mm (WxHxD) / 23KG		
Accessory				
1.8meter IEC Type Power Cord (1.8meter VGA& PS2Cable + 1.8meter USB A Type Cable for ASK2400S)				
Option Relate Item				
AB-6	1.8meter 2-in-1 KVM Cable-USB&VGA		AD-6	1.8meter 3-in-1 KVM Cable-PS/2&VGA
AB-10	3.0meter 2-in-1 KVM Cable-USB&VGA		AD-10	3.0meter 3-in-1 KVM Cable-PS/2&VGA
AB-15	5.0meter 2-in-1 KVM Cable-USB&VGA		AD-15	5.0meter 3-in-1 KVM Cable-PS/2&VGA
AIP-1000M	KVM over IP module for Remote Bios Level Access			



Lift the display




Display rotate to the right



Operating position


DRAWINGS:

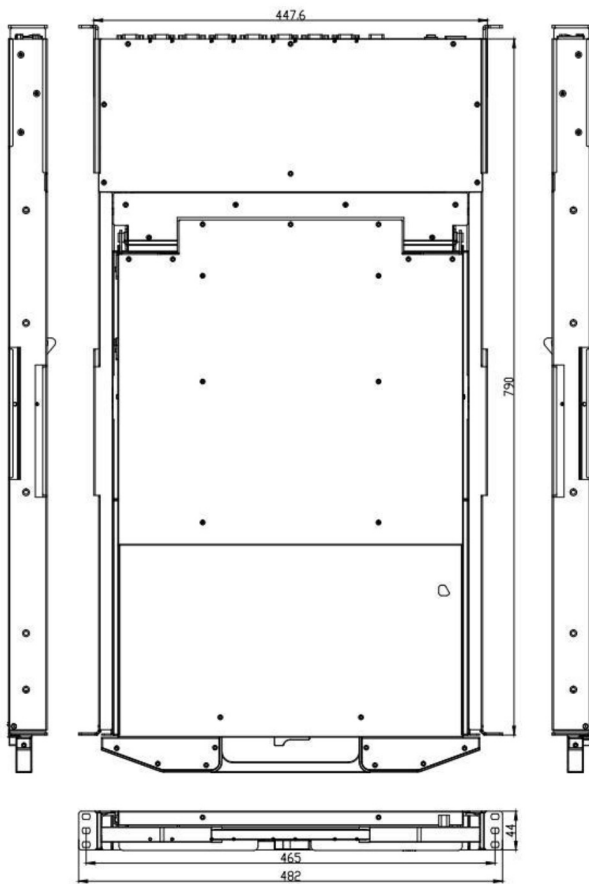

Rear of KVM ASK2400SX
(KVM Only)



Rear of KVM ASK2400SX-S8e
(KVM Only)



Rear of KVM ASK2400SX-S16e
(KVM Only)

