



Model: SDK1019-16e

Dual Slides Rackmount 19" LCD Keyboard Console



Features

- Dual slides for independent Panel and Keyboard tray
- Hidden handle for Keyboard tray
- Support Sun native resolution
- Support 15 various keyboard languages
- Bright Active Matrix TFT Display
- OSD function (On Screen Display) for LCD display
- Durable keyboards w/ 2-buttons Touchpad
- Panel protected by tempered glass



Specification

Display Size	19"
Panel Type	Active Matrix TFT LC D
Resolution Capabilities	Maximum Resolution up to 1280X1024 (SXG A)
Viewing Angle(C R>10)	Right-Left view 140 (Typ) / Up-Down View 140 (Typ)
Contrast Ratio	500:1
Brightness	White 250cd/m2 (C enter 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.2M Colors(6-bit with FRC)
Response Time	Rising Time 2ms, Decay Time 10ms
Operating System	Dos, Windows (3.1, 9x, 2000, N T4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2, SUN and USB
System Cables	VG A+2xPS/2 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45~80KHZ
Power Source	100-240 VAC input
Power Consumption	25W, 21.05W for Panel
Temperature	Operate 0° ~ 50° C /32° ~122°F Storage-20° ~ 60° C /-4° ~ 140°F
Humidity	10%~90%RH
Dimension	450x510x44mm / 17.7x20x1.7in
Package Dimension	570x600x210mm / 22.4x23.6x8.3in
Net Weight	12.4Kg / 27.3Lb
Gross Weight	17.4Kg / 38.3Lb
Chassis Construction	Heavy duty steel materials
Keyboard Language	USA, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss Belgium, Swedish, Norwegian, Danish, Japan, Taiwan
Certification	C E/FC C UL

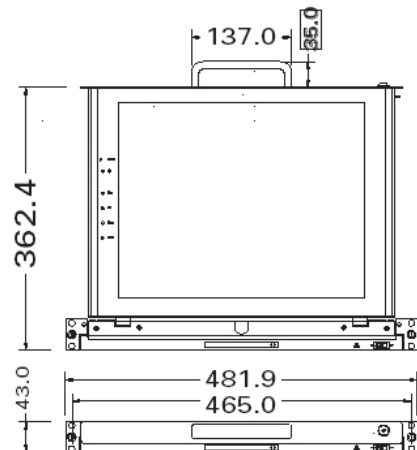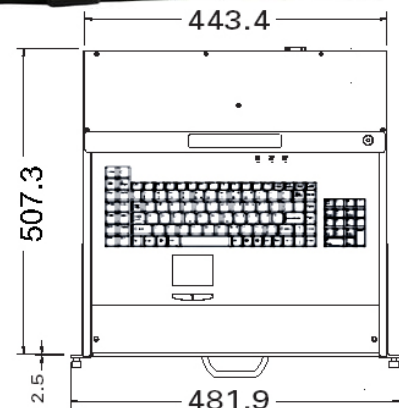

Toll Free: 1-888-itech-18 USA Phone: 1-510-429-9288 Fax: 1-510-372-2736

E-mail: sales@i-techcompany.com 30081 Ahern Ave Union City, CA94587 USA