

Fanless Panel PC with Touchscreen

15" Fanless Panel PC w/Resistive Touch, HS-2616M
(Intel Celeron M processor 600Mhz), w/60W
Adapter, 1GB Memory, 160GB HDD

(Model: BMPC1500CMT)



Features:

Ultra slim, fanless, aluminum front panel design
15" TFT color panel display
Built-in HS-2616(M), 12V DC adapter
Provides Intel P-M/C-M/ULV C-M processor, heavy
duty touch screen
Onboard graphics, dual ethernet, audio with 2W
stereo
AMP and speaker
1 x 2.5" HDD space, 1 x slim CD-ROM space
BPF-3215-V provides CF, 2 x COM, 3 x USB2.0
Option for Wireless LAN module

Display

LCD Size: 15"
Max Resolution: 1024(H) x 768(V) pixels RGB strip arrangement
Brightness (cd/m²): 300 cd/m² (Center 1 points Typ.)
LCD Color: 16.7M colors (6-bit with A-FRC)
Pixel Pitch (mm): 0.297 x 0.297
Touch Screen: 15" resistive or SAW (option)


System

SBC Model: HS-2616(M)
CPU: Intel Pentium M/Celeron M processor 1.3~1.8GHz or ULV Intel Celeron M processor
600MHz/512K (option)
BIOS: AMI PnP Flash BIOS
System Chipset: Intel 852GM(E)/ICH4
System Memory: 1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM
Display Chipset: Intel 852GM(E)
Audio Chipset: RealTek ALC202A
Ethernet Chipset: Intel 82551QM and 82562ET dual 10/100 Mbps LAN, Provides Wireless LAN Module
(option)
Drive Bay: 1 x 2.5" HDD space, 1 x Slim CD-ROM space
Storage: 1 x Type II CF socket
Watchdog Timer: Software programmable time-out intervals from 1~255 sec. or 1~255 min.
Dimensions (LxHxW): 41.5 x 32.0 x 5.75 cm
Cut Out Size (LxH): 36.4 x 28.2 cm
Operation/Storage Temperature: 0~+45 degrees C/-20~+70 degrees C
EMC: FCC/CE
Front Panel Protection: IP65 compliance
Power Adapter: 12V DC in 60W adapter or +12V DC power in

I/O Interface

External I/O: 3 x COM, Line Out, MIC In, 2 x USB2.0, 2 x LAN, CF,
PS/2 KB/MS, VGA

Rear I/O

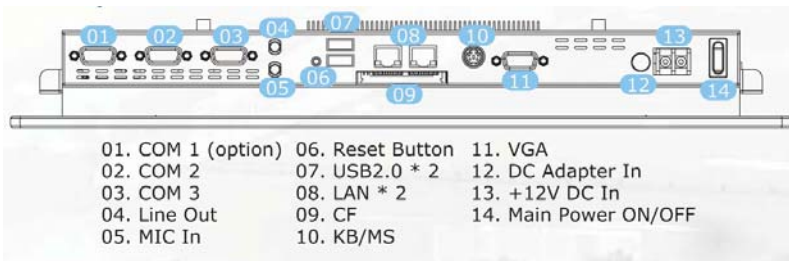

Accessories Options

Table Top Metal Stand, VESA Mount Convert-plate, CPU,
Memory Module, CF Module, Wireless LAN Module,
2.5" HDD, Slim CD-ROM



Mechanical Drawings

