

# Fanless Panel PC with Touchscreen

17" Panel PC w/Touch, HS-2613 (VIA EDEN1.0Ghz CPU), w/60W Adapter, 1GB Memory, 160GB HDD

(Model: BMPC1700VT)



## Features:

Ultra slim, fanless, aluminum front panel design  
17" TFT color panel display  
Built-in HS-2613+VIA V4 Eden 1GHz CPU,  
12V DC adapter  
Provides heavy duty touch screen  
Onboard graphics, dual ethernet, audio controller  
1 x 2.5" HDD space, 1 x slim CD-ROM space  
BPF-3217-Y provides CF, 4 x COM, 1 x USB2.0, TV-Out  
Option for Wireless LAN module

## Display

**LCD Size:** 17"  
**Max Resolution:** 1280 x 1024 pixels  
**Brightness (cd/m<sup>2</sup>):** 300 (center, Typ) @ 7.5mA  
**Contrast Ratio:** 800:1  
**LCD Color:** 16.7M colors (RGB 6-bits + FRC data)  
**Pixel Pitch (mm):** 0.264 x 0.264  
**Touch Screen:** 17" resistive or SAW (option)


## System

**SBC Model:** HS-2613  
**CPU:** VIA V4 Eden 1GHz CPU  
**BIOS:** AMI PnP Flash BIOS  
**System Chipset:** VIA CX700(M)  
**System Memory:** 1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM  
**Display Chipset:** VIA CX700(M)  
**Audio Chipset:** VIA VT1708A  
**Ethernet Chipset:** Dual RealTek RTL8100C 10/100 Mbps LAN, Provides Wireless LAN Module (option)  
**Drive Bay:** 1 x 2.5" HDD space, 1 x Slim CD-ROM space  
**Storage:** 1 x Type II CF socket  
**Watchdog Timer:** Software programmable time-out intervals from 1~255 sec. or 1~255 min.  
**Dimensions (LxHxW):** 45.0 x 37.0 x 6.1 cm  
**Cut Out Size (LxH):** 40.4 x 32.4 cm  
**Operation/Storage Temperature:** 0~+45 degrees C/-20~+70 degrees C  
**EMC:** FCC/CE  
**Front Panel Protection:** IP65 compliance  
**Power Adapter:** 12V DC in 60W adapter or +10~+30V DC power in

## I/O Interface

**External I/O:** 4 x COM, PS/2 KB/MS, 1 x USB2.0, 2 x LAN, VGA, TV-Out, CF, MIC In, Line Out

## Rear I/O

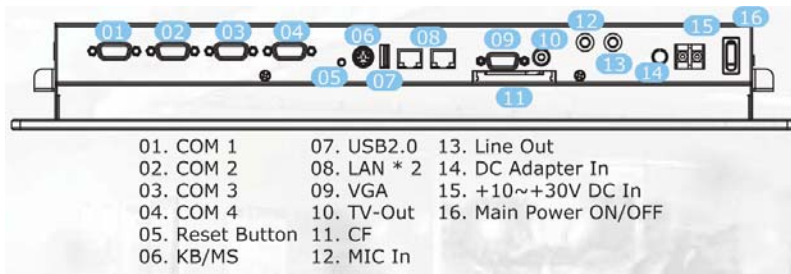

## Accessories Options

Table Top Metal Stand, Memory Module, CF Module, Wireless LAN Module, 2.5" HDD, Slim CD-ROM



# Mechanical Drawings

