

# Fanless Panel PC with Touchscreen

19" Panel PC w/Touch, HS-2613  
(VIA EDEN1.0Ghz,CPU), w/60W Adapter, 1GB  
Memory, 160GB HDD

(Model: BMPC1900VT)



## Features:

Ultra slim, fanless, aluminum front panel design  
19" TFT color panel display  
Built-in HS-2613+VIA V4 Eden 1GHz CPU,  
12V DC adapter  
Provides heavy duty touch screen  
Onboard graphics, dual ethernet, audio controller  
1 x 2.5" HDD space, 1 x slim CD-ROM space  
BPF-3219-Y provides CF, 4 x COM, 3 x USB2.0, TV-Out  
Option for Wireless LAN module

## Display

LCD Size: 19"  
Max Resolution: 1280 x 1024 pixels  
Brightness (cd/m<sup>2</sup>): 300 (center, Typ) @ 7.5mA  
Contrast Ratio:1300:1  
LCD Color: 16.7M colors (RGB 8-bit data)  
Pixel Pitch (mm): 0.294 x 0.294  
Touch Screen: 19" resistive or SAW (option)


## System

SBC Model: HS-2613  
CPU: VIA V4 Eden 1GHz CPU  
BIOS: AMI PnP Flash BIOS  
System Chipset: VIA CX700(M)  
System Memory: 1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM  
Display Chipset: VIA CX700(M)  
Audio Chipset: VIA VT1708A  
Ethernet Chipset: Dual RealTek RTL8100C 10/100 Mbps LAN, Provides Wireless LAN Module (option)  
Drive Bay: 1 x 2.5" HDD space, 1 x Slim CD-ROM space  
Storage: 1 x Type II CF socket  
Watchdog Timer: Software programmable time-out intervals from 1~255 sec. or 1~255 min.  
Dimensions (LxHxW): 48.0 x 38.0 x 6.1 cm  
Cut Out Size (LxH): 43.4 x 34.9 cm  
Operation/Storage Temperature: 0~+45 degrees C/-20~+70 degrees C  
EMC: FCC/CE  
Front Panel Protection: IP65 compliance  
Power Adapter: 12V DC in 60W adapter or +10~+30V DC power in

## I/O Interface

External I/O: 4 x COM, 3 x USB2.0, PS/2 KB/MS, 2 x LAN, VGA, TV-Out, CF,  
MIC In, Line Out

## Rear I/O

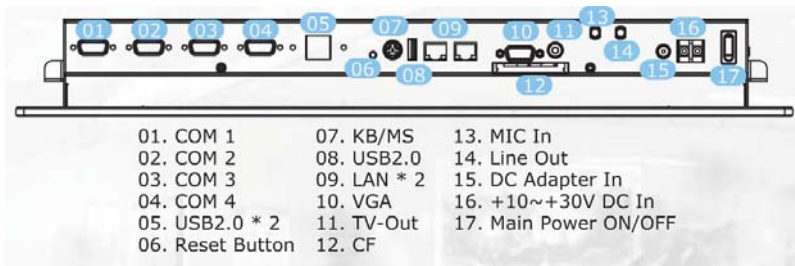

## Accessories Options

Table Top Metal Stand, Memory Module, CF Module,  
Wireless LAN Module, 2.5" HDD, Slim CD-ROM



# Mechanical Drawings

