


IR 6-points Touch Widescreen Display





IR 6-points Touch Chassis Mount, 21.5" LCD monitor, 1920 x 1080, 380 nits, DVI+VGA+AUDIO, CCFL backlight of panel +Flex wall mount, USB Controller. (High speed two point multi-touch --Support Linux and Window XP/7/8)

(Model: BCHW2150-MOT)

FEATURES:

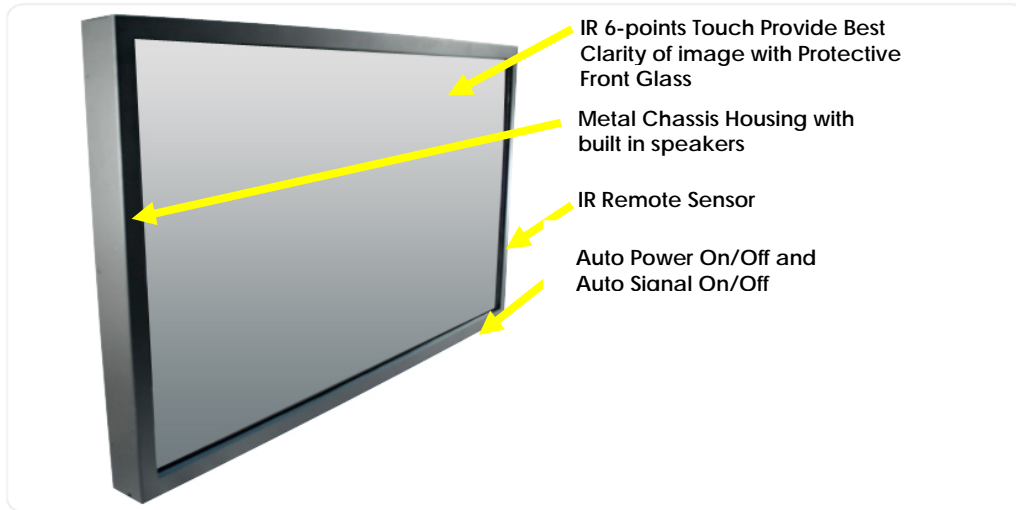

**BCH Series
IR 6-points Touch
Widescreen Display
Chassis Mount
LCD Monitor**

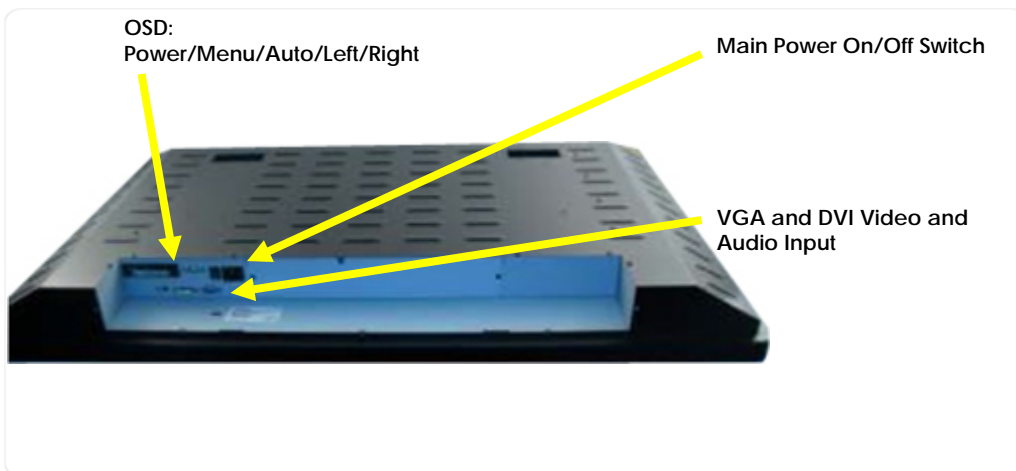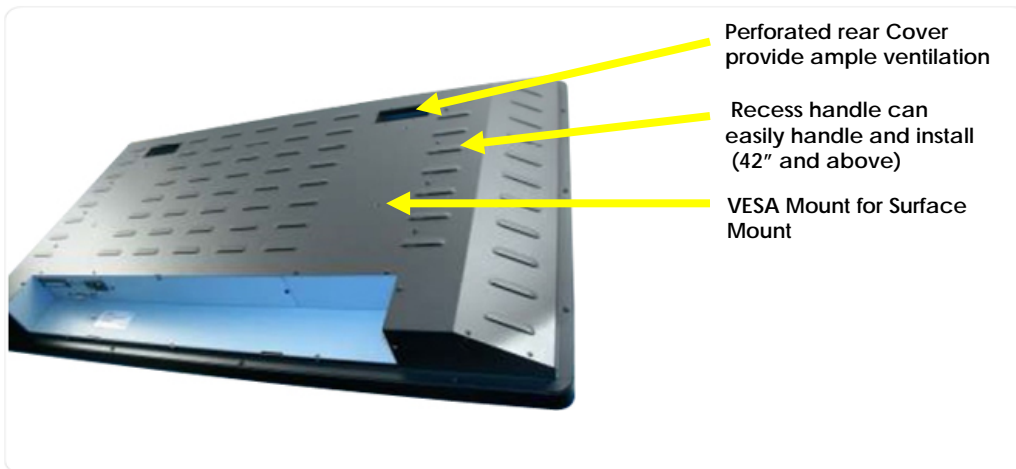

Display Specifications – CCFL PANEL

Active Screen Size	21.5" (16:9)
Display Area(mm)	476.64(H) x 268.11(V)
Number of Pixels	1920 x 1080
Contrast Ratio	1000 : 1
Colors	16.7M (RGB 6-bit + Hi_FRC)
Brightness(cd/m ²)	200~250
View Angle	R/L178° x U/D178°
Response Time	5 ms
Backlight Life Time	30,000/hr

Power

Power Input	100V~240V AC 50/60Hz
Total Power Consumption	21 W


Mechanical Specifications

Operating Temp.	0°~35°C
Relative Humidity	20~80% RH
Storage Temp.	-20°~40°C
Dimensions(mm)	537(L)x329(W)x85.1(D)
Mounting(LxW/mm)	100(L)x100(W)

Accessories

CD x 1
Power Cord x 1
I/O Cover x 1

Included Low Profile Wallmount Bracket

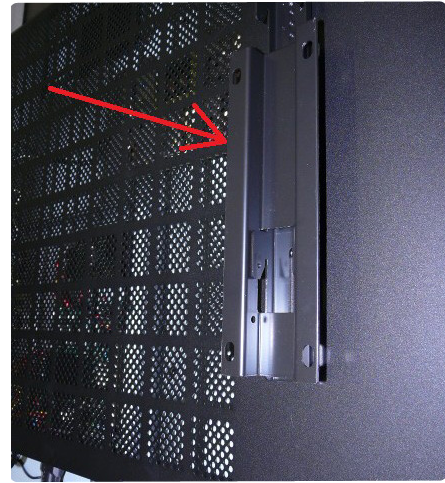

Mechanical Drawings

