




IR 6-points Touch Widescreen Display



IR 6-points Touch Chassis Mount, 32" LCD monitor, 1920 x 1080, 380 nits, DVI +VGA+AUDIO, CCFL backlight of panel +Flex wall mount, USB Controller. (High speed two point multi-touch --Support Linux and Window XP/7/8)

(Model: BCHW3200-MOT)

FEATURES:

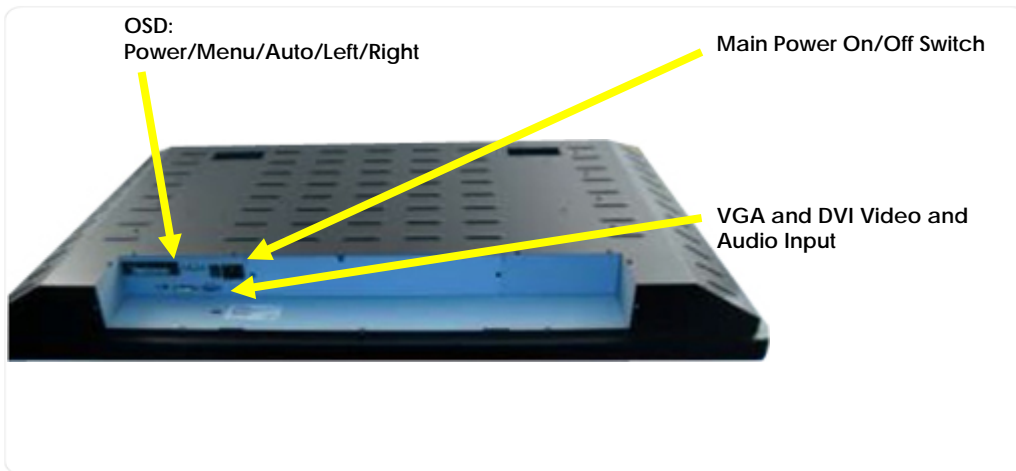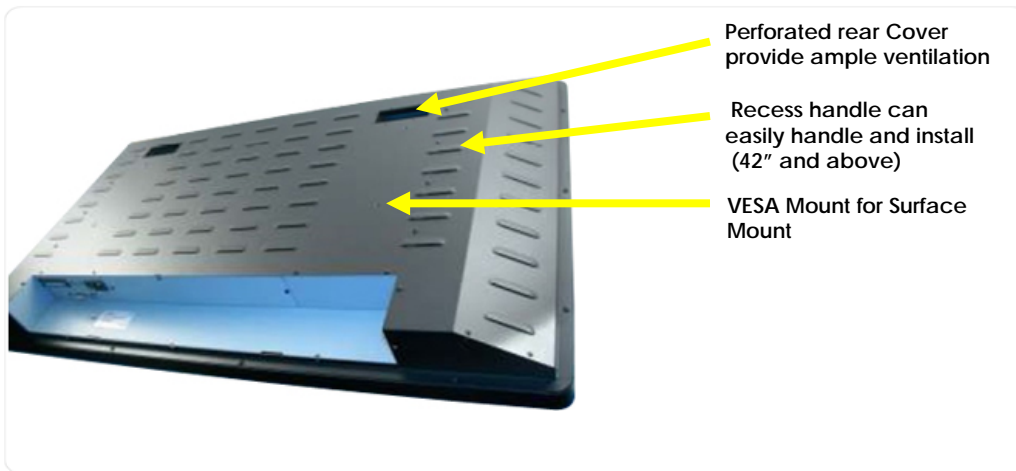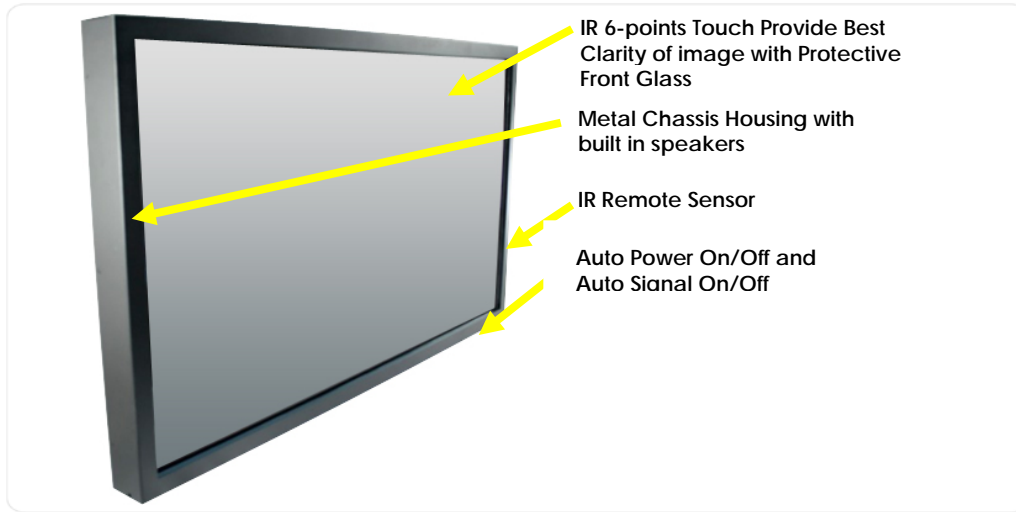

**BCH Series
IR 6-points Touch
Widescreen Display
Chassis Mount
LCD Monitor**

Display Specifications – CCFL PANEL

Active Screen Size	32" (16:9)
Display Area(mm)	698.4(H) x 392.85(V)
Number of Pixels	1920 x 1080
Contrast Ratio	5000 : 1
Colors	16.7M
Brightness(cd/m ²)	400
View Angle	R/L178° x U/D178°
Response Time	6.5 ms
Backlight Life Time	50,000/hr

Power

Power Input	100V~240V AC 50/60Hz
Total Power Consumption	71 W

Mechanical Specifications



Operating Temp.	0°~35°C
Relative Humidity	20~80% RH
Storage Temp.	-20°~40°C
Dimensions(mm)	763(L)x472(W)x130(D)
Mounting(LxW/mm)	400(L)x200(W)

Accessories

CD x 1
Power Core x 1
Wall mount x 1
Remote Control x 1
I/O Cover x 1



Mechanical Drawings

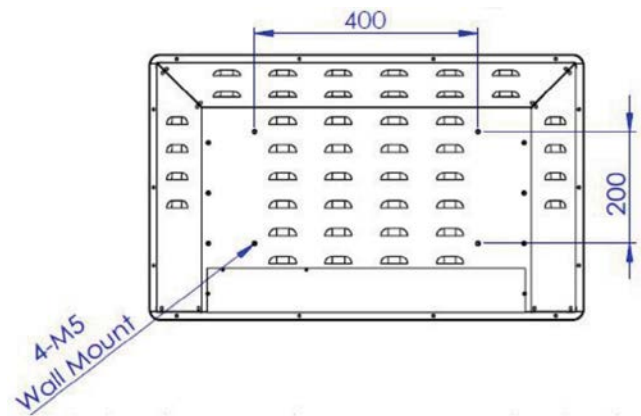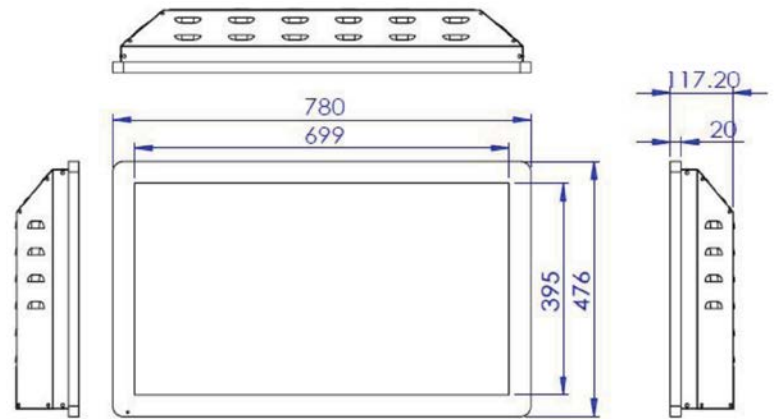

Included Low Profile Wallmount Bracket

