



Model: FOP1500

# 15" Open Frame LCD Monitor

## Features

- \* RoHS compliant, meet UL, CSA, TUV, FCC B, VCCI B, CE, TCO 99, TUV Ergo, EPA Energy Star certification
- \* Kiosks, equipment, and instruments drop-in design
- \* Friendly design on various location options of OSD keys
- \* Superior viewing angles, contrast ratio, and brightness
- \* Sturdy and ventilation consideration structure





## Specifications:

<b>LCD panel</b>	TFT Active Matrix color	80% brightness uniformity (typical)
	15 in/ 381 mm diagonal viewable	500:1 contrast ratio (typical)
<b>Video Interface</b>	XGA 1024 x 768 resolution (maximum)	12 ms response time (typical at 25oC)
	0.297 x 0.297 mm pixel pitch	150o (H), 150o (V) viewing angle (typical at CR=5)
	16 million displayable colors	50,000 hours MTBF (typical at 25oC)
	250 nit brightness (typical, 80% touch option)	
<b>Power Management</b>	VGA compatible analog RGB	
	24-62 kHz horizontal scan	
	50-75 Hz vertical refresh	
	On-screen display	
<b>Mechanical and Environment</b>	VESA DPMS standard	
	5W sleep mode, 30W normal mode	
	12 V/2.92 A, 35 W, Universal Input Adapter	
<b>Mechanical and Environment</b>	Operation temperature: 0~50oC [32~122oF]	
	Storage temperature: -20~60oC [-4~140oF]	
	Humidity: 85% (maximum)	
	391.6 x 299 x 46.5 mm [15.4 x 11.8 x 1.83 inch]	
	3.9 Kg [8.5 Lb]	

## Options

- \* Resistive, Capacitive, and Surface Acoustic Wave touchscreens
- \* DVI, Composite Video, BNC video outputs
- \* Embedded Stand-Alone or Network MPEG Players

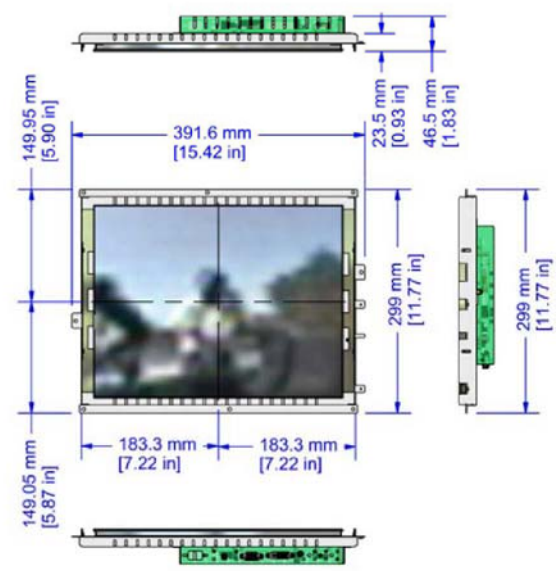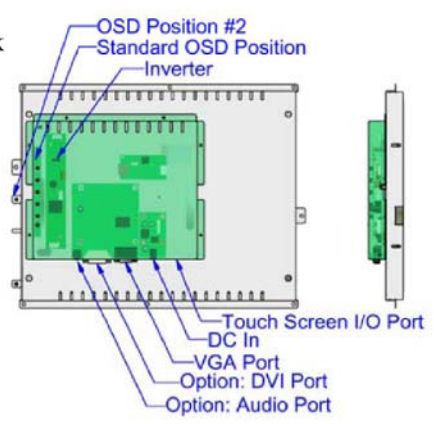



Model: FOP1500

# 15" Open Frame LCD Monitor

