


Open Frame (5-Wire Resistive/SAW) Touch LCD MONITOR

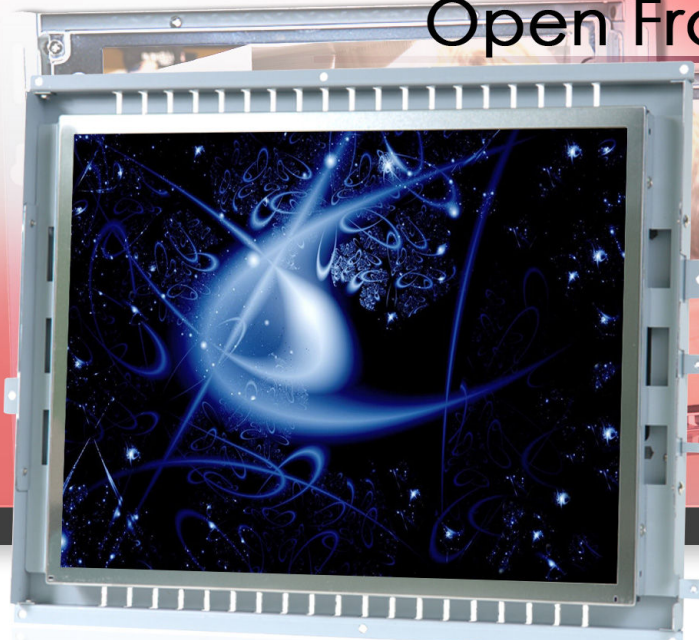

15" Open Frame Serial/USB Touch LCD Monitor

Features:

- * RoHS Compliant, meets UL, CSA, TUV, FCC B, VCCI B, CE TCO 99, TUV Ergo, EPA Energy Star certifications
- * Kiosks, equipment, and instruments drop-in design
- * Superior viewing angles, contrast ratio, and brightness
- * Sturdy and ventilation consideration structure

Specifications:

LCD Panel

TFT Active Matrix color
15 inch diagonal viewable
XGA 1024 x 768 resolution (maximum)
0.297 x 0.297 mm pixel pitch
16 million color display
250 nit brightness (typical, 80-90% with touchscreen)
80% luminance uniformity (minimum)
500:1 contrast ratio (typical at 25°C)
12 ms response time (typical)
±75°L/R, 75°U/D
50,000 hours MTBF (minimum at 25°C)

Power Management

VESA DPMS standard
5W sleep mode, 30W normal mode
12V/3.33A, 40W, Universal Input Adapter

Touchscreens Available:

- FOP1500-RTS-S**
5-Wire Resistive RS232 Touch O/F Monitor
- FOP1500-RTS-U**
5-Wire Resistive USB Touch O/F Monitor
- FOP1500-SAW-S**
SAW RS232 Touch O/F Monitor
- FOP1500-SAW-U**
SAW USB Touch O/F Monitor

Mechanical and Environment

Operation temperature: 0~50oC [32~122oF]
Storage temperature: -20~60oC [-4~140oF]
Humidity: 80% (maximum)
391.6 x 299 x 46.5 mm [15.4 x 11.8 x 1.83 inch]
3.9 kg [8.5 lbs]

Video Interface

VGA compatible analog RGB
24-62 kHz horizontal scan
50-75 Hz vertical refresh
On-screen display Keys

Technical Data

