

Full IP65 Stainless LCD Monitor

Rugged Completely Sealed Full IP66/NEMA4X Stainless Steel Chassis/Surface Mount, 15" LCD monitor, 1024 x 768, 1000 nits, with Glass, VGA and DVI input with Projective Capacitive Touch (1-2mm) USB Controller

MODEL: CCH1500HB-SIP-PCT



USB INPUT IS OPTIONAL FOR TOUCHSCREEN

Features:

- High Contrast color TFT LCD Monitor support resolution up to XGA(1024 x 768)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance

Specifications:




Display	Viewing Size Image	15"
	Active Display Area (mm)	304.1 (H) x 228.1 (V)
	Pixel Pitch (mm)	0.297 (H) x 0.297(V)
	Resolution	1024 x 768
	Contrast Ratio	700 : 1 (typ.)
	Color	16.2M(6bits+FRC)
	Brightness	1000 cd/m ²
	Viewing Angle	-70~70 (H) ; -60~60 (V)
	Recommended Resolution	1024 x 768 @ 60H, 75Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in,with External AC-DC Adapter(100-240V)
	Consumption	25W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

IP65 Waterproof connectors:

VGA Input DVI Input USB Input Power Input
(Option)



Mechanical Drawing

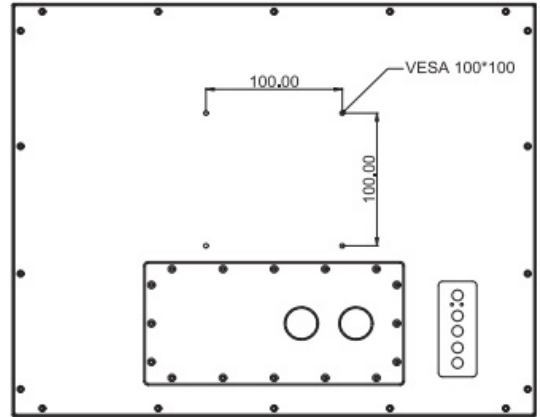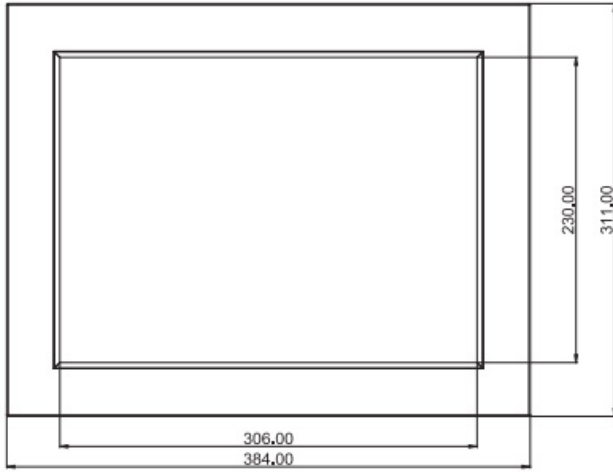

UNIT : mm