

FULL IP65 STAINLESS LCD MONITOR

Rugged Completely Sealed Full IP66/NEMA4X Stainless Steel Chassis/Surface Mount, 15" LCD monitor, 1024 x 768, 1000 nits, with Glass, VGA and DVI input with 5 Wire Resistive Touch Screen and USB Controller

MODEL: CCH1500HB-SIP-TR



USB INPUT IS OPTIONAL FOR TOUCHSCREEN

FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to XGA(1024 x 768)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance



Standard VGA DVI + Power input



USB for touchscreen (Optional)



(Standard 6ft long), option for 10ft or 15ft



OSD




Standard external Power adapter, standard I/O Water proof cable: 1 x VGA, Power x1 6ft long

OPTIONAL:



All in one PC with touch Included IP water proof connectors and cables

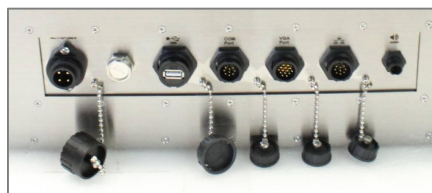

Power, USB, COM, VGA, LAN and Audio out



For outdoor used integrated with pressure release valve.



Optional for front Light Sensor for High brightness LCD

SPECIFICATIONS:

Display	Viewing Size Image	15"
	Active Display Area (mm)	304.1 (H) x 228.1 (V)
	Pixel Pitch (mm)	0.297 (H) x 0.297(V)
	Resolution	1024 x 768
	Contrast Ratio	700 : 1 (typ.)
	Color	16.2M(6bits+FRC)
	Brightness	1000 cd/m ²
	Viewing Angle	-70~70 (H) ; -60~60 (V)
	Recommended Resolution	1024 x 768 @ 60H, 75Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in,with External AC-DC Adapter(100-240V)
	Consumption	25W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP



**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

