

# RUGGED COMPLETELY SEALED FULL IP66/NEMA4X STAINLESS STEEL CHASSIS/SURFACE MOUNT



USB INPUT IS OPTIONAL  
FOR TOUCHSCREEN

15" Industrial Panel / 1024x768 / 1000nits, Operating Temp.: -30C ~ 85C  
Stainless 304 enclosure with Full IP66 / VESA mount, AR glass / Rear OSD  
I/O ( all connectors are waterproof connectors / 6ft long ): VGA and 12VDC  
with external 100-240VAC power adapter

*Remark: This unit designed to be installed under completed shaded area without direct sunlight. Not facing east and west*

**Model: CCH1500HB-SIP**

## FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to XGA(1024 x 768 )
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance


## SPECIFICATIONS:

Display	Viewing Size Image	15"
	Active Display Area (mm)	306 (H) x 230 (V)
	Pixel Pitch (mm)	0.297 (H) x 0.297(V)
	Resolution	1024 x 768
	Contrast Ratio	700 : 1 (typ.)
	Color	16.2M( 6bits+FRC)
	Brightness	1000 cd/m <sup>2</sup>
	Viewing Angle	-70~70 (H) ; -60~60 (V)
	Recommended Resolution	1024 x 768 @ 60H, 75Hz
	Signal Connector	VGA
Power	Source	12V DC in, with External AC-DC Adapter(100-240V)
	Consumption	25W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

*\*Specifications subject to change without notice, not responsible for typographical errors.*

## MECHANICAL DRAWING:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

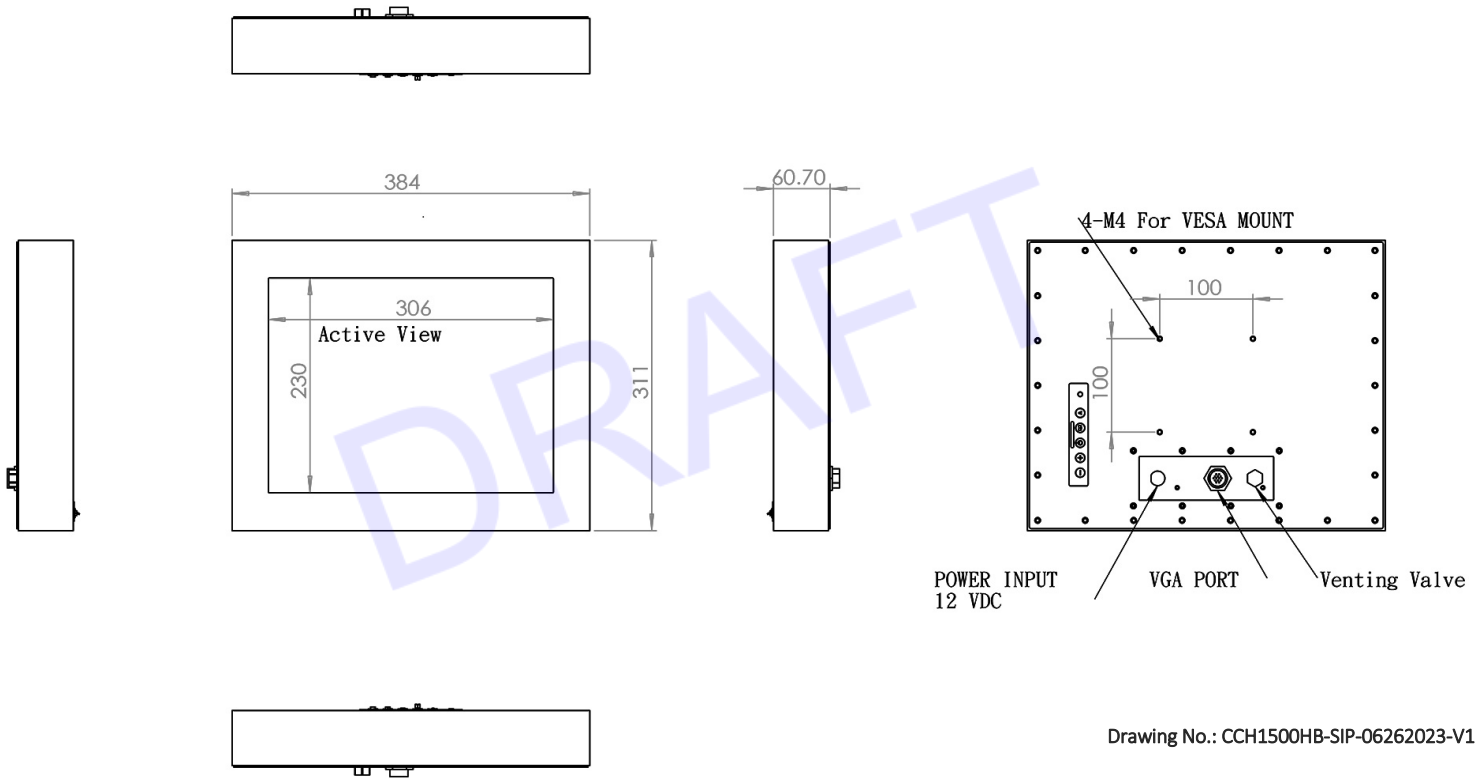

Drawing No.: CCH1500HB-SIP-06262023-V1

### IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input  
(Option)