

Full IP65 Stainless LCD Monitor

Rugged Completely Sealed Full IP66/NEMA4X Stainless Steel Chassis/Surface Mount, 17" LCD monitor, 1280 x 1024, 350 nits, with Glass, VGA and DVI input with Projective Capacitive Touch (1-2mm) USB Controller



USB INPUT IS OPTIONAL FOR TOUCHSCREEN

MODEL: CCH1700-SIP-PCT

Features:

- High Contrast color TFT LCD Monitor support resolution up to XGA (1280 x 1024)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance

Specifications:





Display	Viewing Size Image	17"
	Active Display Area (mm)	337.92 (H) x 207.34 (V)
	Pixel Pitch (mm)	0.264 (H) x 0.264(V)
	Resolution	1280 x 1024
	Contrast Ratio	1000 : 1 (typ.)
	Color	16.7M(6bits+FRC)
	Brightness	350 cd/m ²
	Viewing Angle	-85~80(H) ; -85~80 (V)
	Recommended Resolution	1280 x 1024 @ 60Hz, 75 Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in,with External AC-DC Adapter(100-240V)
	Consumption	42W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

IP65 Waterproof connectors:

VGA Input DVI Input USB Input Power Input
(Option)



Mechanical Drawing

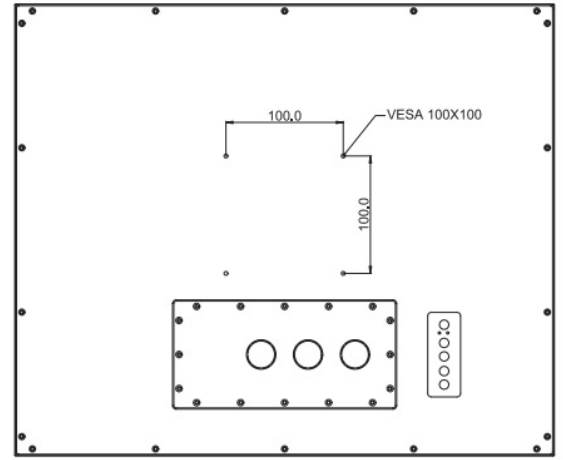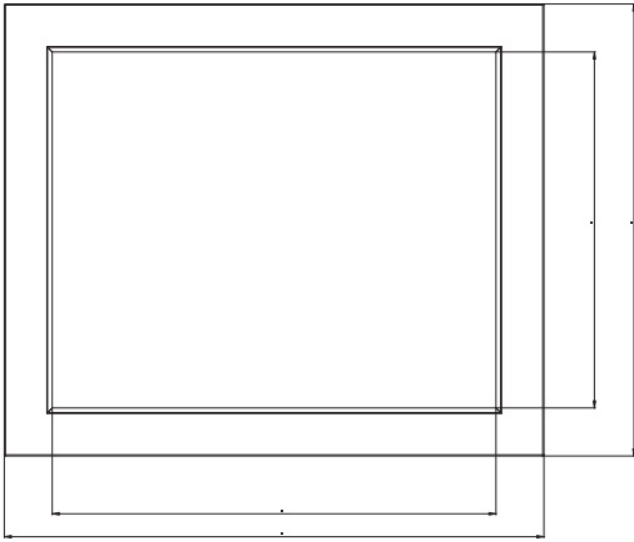

UNIT : mm