

Full IP65 Stainless LCD Monitor

Rugged Completely Sealed Full IP66/NEMA4X Stainless Steel Chassis/Surface Mount, 19" LCD monitor, 1280 x 1024, 300 nits, with Glass, VGA and DVI input with Projective Capacitive Touch (1-2mm) USB Controller.

MODEL: CCH1900-SIP-PCT



USB INPUT IS OPTIONAL FOR TOUCHSCREEN

Features:

- High Contrast color TFT LCD Monitor support resolution up to SXGA(1280 x 1024)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance

Specifications:




Display	Viewing Size Image	19"
	Active Display Area (mm)	376.32(H) x 301.06 (V)
	Pixel Pitch (mm)	0.294 (H) x 0.294(V)
	Resolution	1280 x 1024
	Contrast Ratio	2000 : 1 (typ.)
	Color	16.7M (8bits/colors)
	Brightness	300 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89(V)
	Recommended Resolution	1280 x 1024 @ 60Hz, 75 Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in,with External AC-DC Adapter(100-240V)
	Consumption	51W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option)

Mechanical Drawing

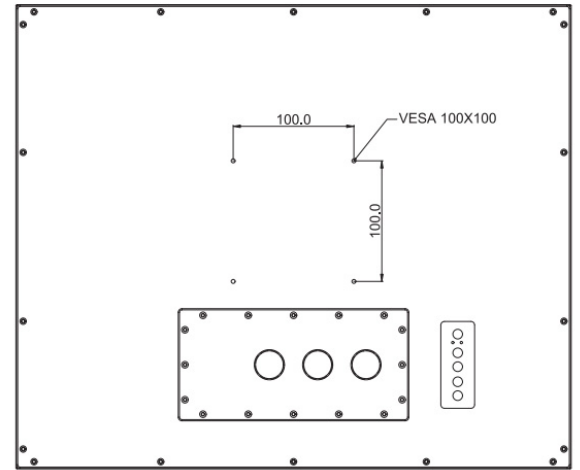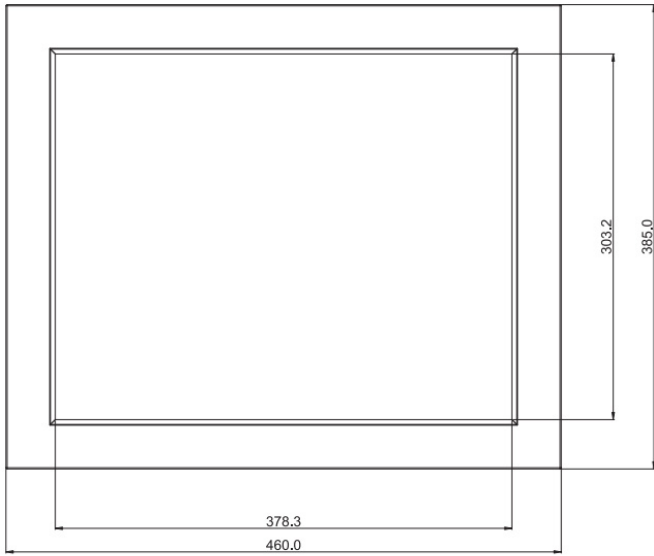

UNIT: mm