


CCHH5200



52" Sunlight Readable LCD Display

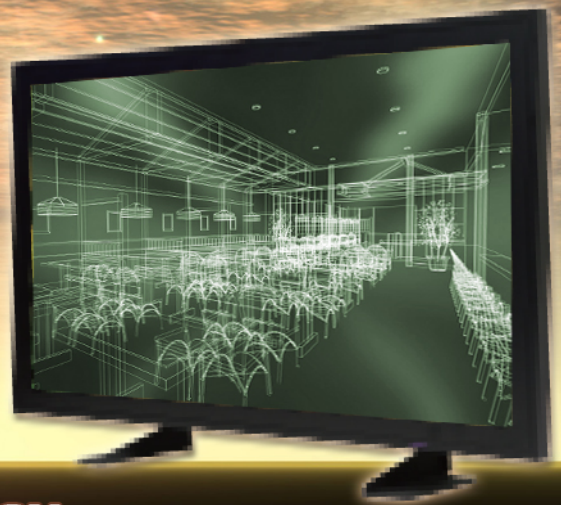

Specifications

LCD PANEL	
Brightness	600 cd/m ²
Contrast Ratio	1500:1
Viewing Angle	H:176° / V:176°
Response Time	6.5ms (GTG)
Supported Colors	16.7M colors
Resolution	1920 x 1080 (16:9)
DISPLAY FEATURES	
Horizontal Frequency	30 ~ 90 KHz
Vertical Frequency	56 ~ 75 KHz
Input Resolution	1920 x 1080@60Hz (Analog) 1920 x 1080@60Hz (Digital)
DDC	DDC 2B
OSD Control	RS232C, Push button, IR Remote Controller
OSD Language	English, Japanese, Chinese
PHYSICAL FEATURES	
Connector	DVI / VGA / AV / Component / AV / S-video / HD-SDi BNC (optional) / Audio (optional)
Dimensions w/o Stand	1269 x 766 x 140 mm (WxHxD)
Weight w/o Stand	Net: 51.7kg Gross: 61.7kg
Wall / Arm Mount Type	200mm x 200mm / 200mm x 600mm VESA

SPECIAL FEATURES	
Multimedia	PIP, PAP, Zoom
Fanless Design	Yes
Source Auto Detect	Yes
Communication Port (Transport Protocol)	D-Sub 9 Pin In, RJ45 In/Out (RS232C In, RS-485 In/Out)
POWER CONSUMPTION	
Power Supply	AC 100V ~ 240V (50 / 60 Hz)
ENVIRONMENTAL	
Operating Temperature	5°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	85%RH
Storage Humidity	85%RH
OPTIONS	
Protective Surface	4mm Tempered Glass (AG/AR)
Audio Amplifier	In *1, Out *1
HD-SDi / SDi	In *1, Out *1

