


# RUGGED COMPLETELY SEALED FULL IP66/NEMA4X STAINLESS STEEL CHASSIS/SURFACE MOUNT

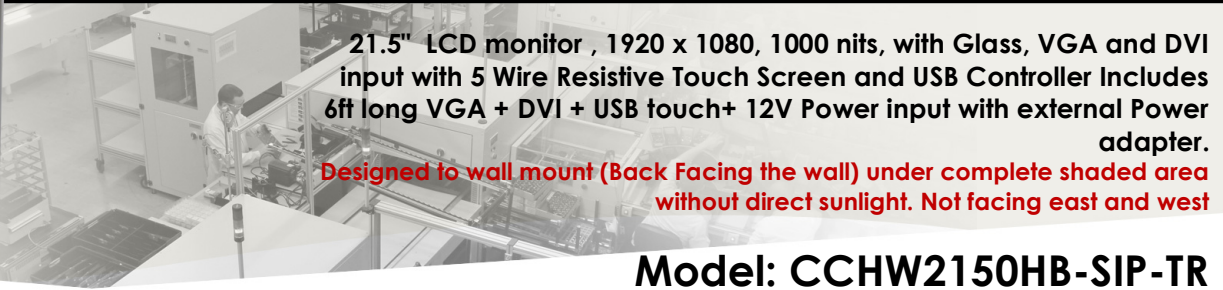

21.5" LCD monitor , 1920 x 1080, 1000 nits, with Glass, VGA and DVI input with 5 Wire Resistive Touch Screen and USB Controller Includes 6ft long VGA + DVI + USB touch+ 12V Power input with external Power adapter.  
Designed to wall mount (Back Facing the wall) under complete shaded area without direct sunlight. Not facing east and west

**Model: CCHW2150HB-SIP-TR**

## FEATURES:

- High Contrast color LCD Monitor with resolution up to Full HD (1920 x 1080 )
- Completely Sealed FULL IP66/NEMA4X
- High Shock & Vibration Resistance
- Widely Application: Automation, Medical, Tourist, Transportation


## SPECIFICATIONS:

<b>Display</b>	Viewing Size Image	21.5"
	Active Display Area (mm)	479 (H) x 270.50 (V)
	Pixel Pitch (mm)	0.248 x 0.248
	Resolution	1920 x 1080
	Contrast Ratio	5000 : 1 (typ.)
	Color	16.7M (8bits/colors)
	Brightness	1000 cd/m <sup>2</sup>
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI
<b>Power</b>	Source	12V DC in, with External AC-DC Adapter(100-240V)
	Consumption	38W typical, normal operation
	Management	VESA DPMS Compliant
<b>Optional</b>	Touch	Resistive, PCAP
	High Brightness	YES
	Auto Dimming	YES
	POWER in	DC24V ,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

## APPLICATIONS:



## MECHANICAL DRAWING:

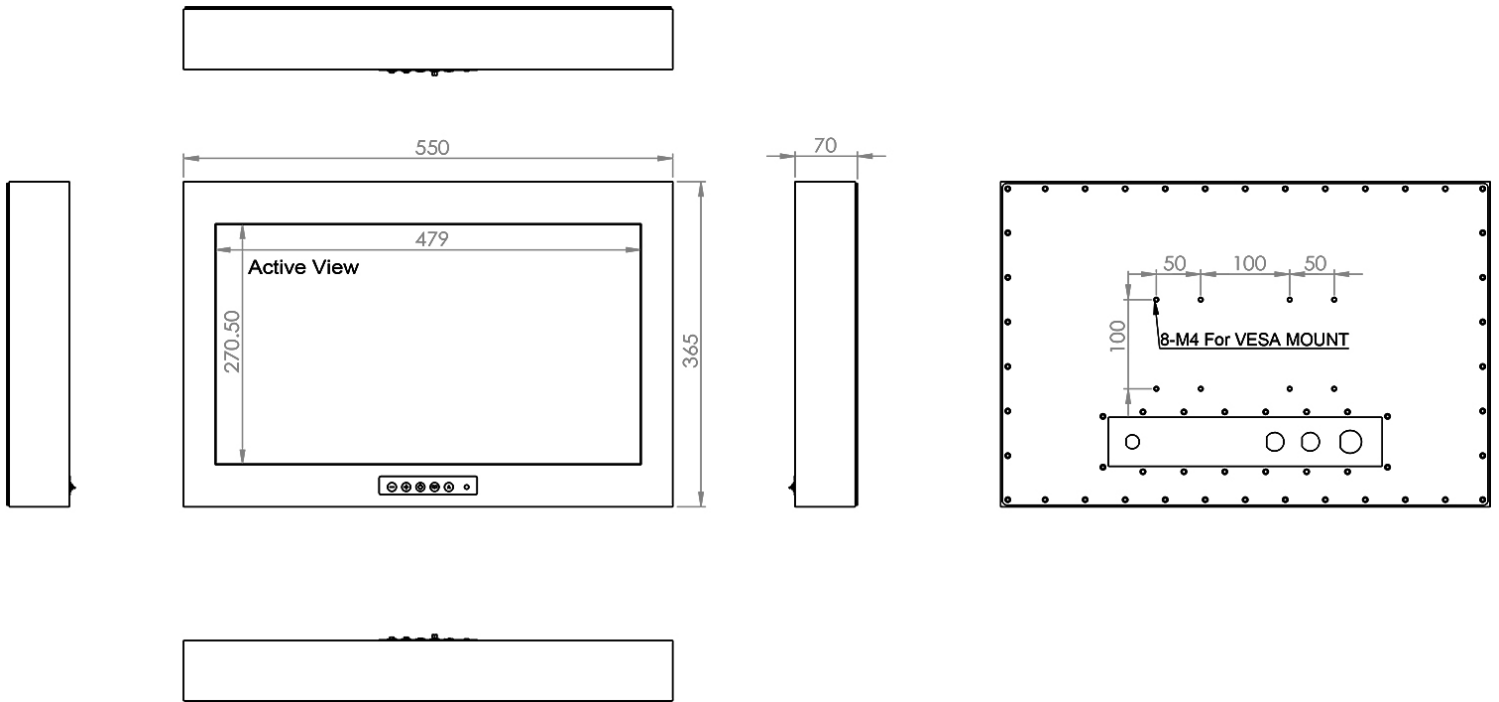

IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input  
(Option)