

# Full IP65 Stainless LCD Monitor

Rugged Completely Sealed Full IP66/NEMA4X  
Stainless Steel Chassis/Surface Mount

24" Normal Brightness 300 nits, 1920x1080 with 5 Wire Resistive Touch Screen  
and USB Controller based on Default 3 set waterproof connectors Waterproof  
connectors & cables: DVI,VGA USB for touchscreen & Power 6ft long only with  
external 100~240V AC + adapter



**Model: CCHW2400-SIP-TR**

## FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to Full HD (1920 x 1080 )
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance
- Auto Power On: Monitor is always "ON" when connect to power.
- Auto Video Signal On: Monitor (Backlight) will turn off when no video signal, but it will Auto turn back on.

## SPECIFICATIONS:

<b>Display</b>	Viewing Size Image	24"
	Active Display Area (mm)	535 (H) x 302 (V)
	Pixel Pitch (mm)	0.27675 (H) x 0.27675(V)
	Resolution	1920 x 1080
	Contrast Ratio	3000: 1 (typ.)
	Color	16.7M(8bits+color)
	Brightness	300 cd/m <sup>2</sup>
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI, USB for Touch
<b>Power</b>	Source	External 100~240V AC + Adapter
	Consumption	45W typical, normal operation
	Management	VESA DPMS Compliant
<b>Optional</b>	Touch	Resistive, PCAP ,IR
	High Brightness	YES
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP
Speakers		

*\*Specifications subject to change without notice, not responsible for typographical errors.*

IP65 Waterproof connectors:




VGA Input DVI Input USB Input Power Input

(Option)

## MECHANICAL DRAWING:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

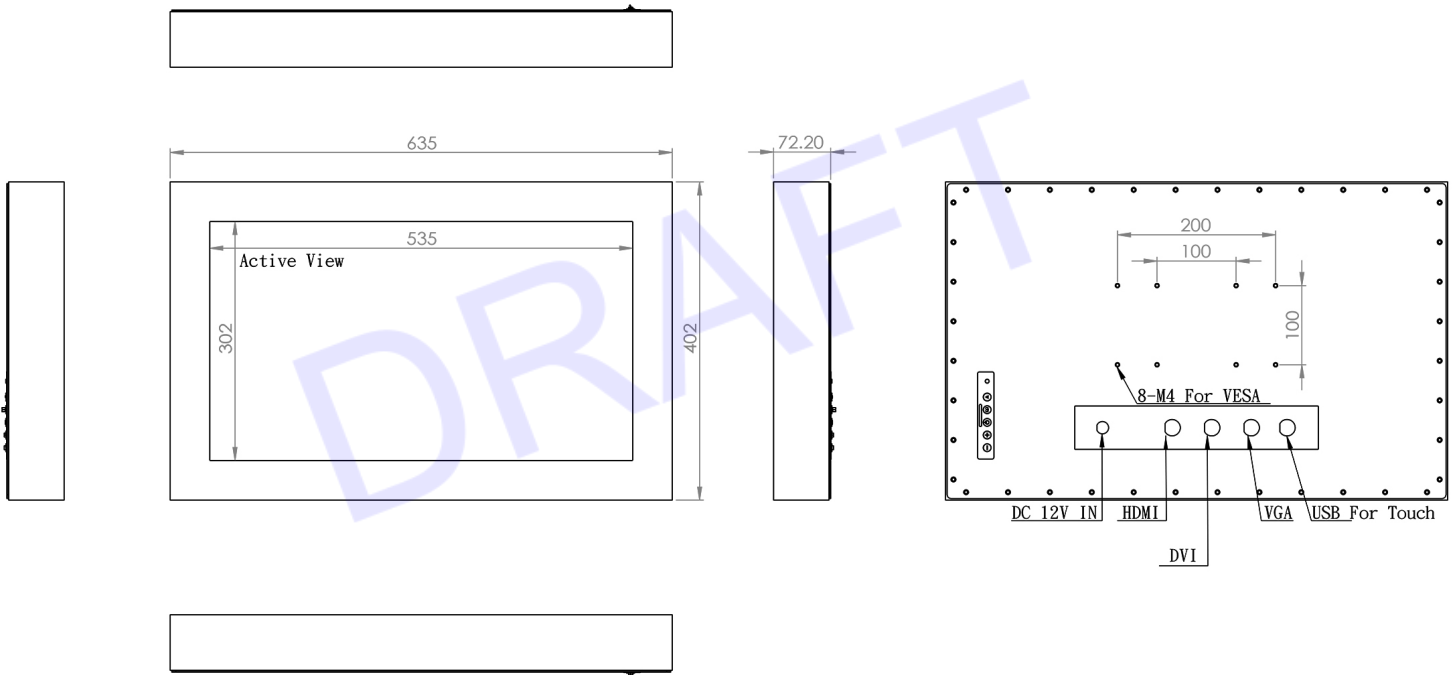

Drawing No.: CCHW2400-SIP-TR-09152022-V1