

**RUGGED COMPLETELY SEALED FULL IP66/NEMA4X
STAINLESS STEEL CHASSIS/SURFACE MOUNT**

**42" Wide LCD Monitor, 1920 x 1080, 1000 nits, with Glass
VGA and DVI input with Projective Capacitive
Touch (1-2mm) USB Controller**

Model: CCHW4200HB-SIP-PCT

FEATURES:

- High Contrast color LCD Monitor with resolution up to FULL HD (1920x1080)
- Completely Sealed FULL IP66/NEMA4X
- High Shock & Vibration Resistance
- Widely Application: Automation, Medical, Tourist, Transportation


SPECIFICATIONS:

Display	Viewing Size Image	42"
	Active Display Area (mm)	930.25 (H) x 523.01 (V)
	Pixel Pitch (mm)	0.4845(H)x 0.4845(V)
	Resolution	1920 x 1080
	Contrast Ratio	4000:1 (typ.)
	Color	16.7 M(8bits+colors)
	Brightness	1000 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI
Power	Source	AC100V~AC240V
	Consumption	110W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,HDMI,DP

APPLICATIONS:



MECHANICAL DRAWING:

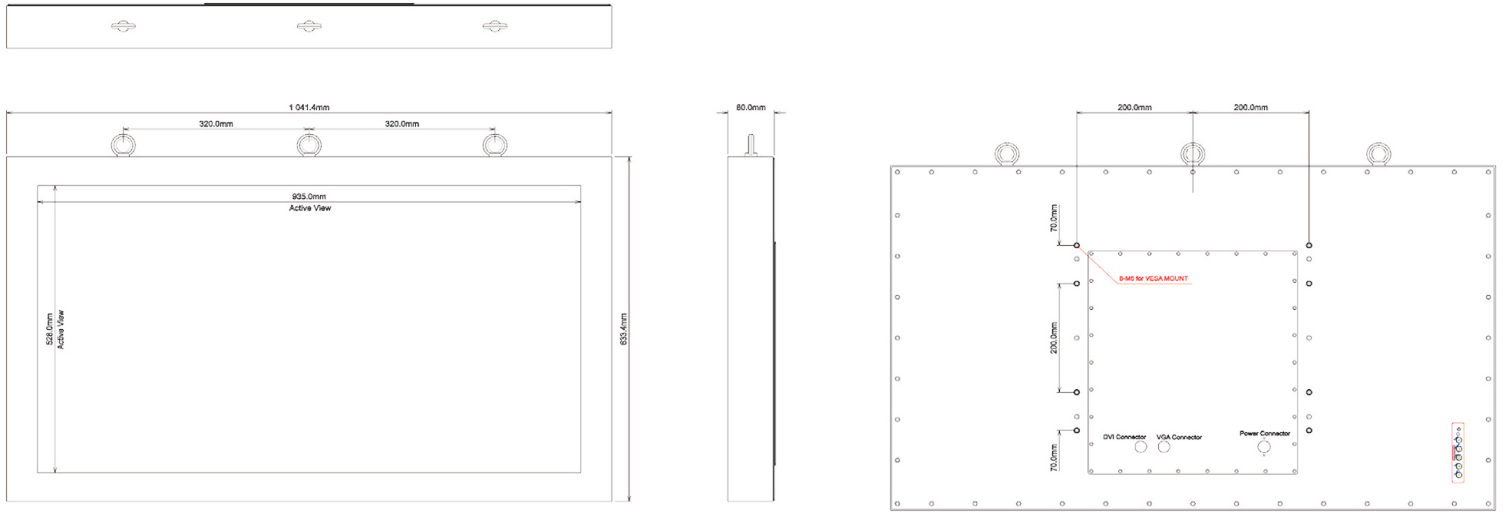

IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option)