

Full IP65 Stainless LCD Monitor

Rugged Completely Sealed Full IP66/NEMA4X Stainless Steel Chassis/Surface Mount, 55" Normal Brightness 450 nits, 1920x1080 with AR Front Glass. Built in 100~240V AC + adapters based on Default 3 set waterproof connectors

Waterproof Connectors & Cables:
HMDI +DVI, VGA & Power 6ft long only



USB INPUT IS OPTIONAL FOR TOUCHSCREEN

MODEL: CCHW5500-SIP

FEATURES:

- High contrast color TFT LCD monitor support resolution up to Full HD (1920x1080)
- Widely used in chemical industry, food industry, medical devices, appliances etc with good corrosion resistance.

SPECIFICATIONS:

Display	Viewing Size Image	55"
	Active Display Area (mm)	1209.6 (H) x 680.4 (V)
	Pixel Pitch (mm)	0.21 (H)x 0.63(V)
	Resolution	1920x1080
	Contrast Ratio	4000 : 1 (typ.)
	Color	1073.7M (10bits/color)
	Brightness	450 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89(V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI, HDMI
Power	Source	AC100V~AC240V
	Consumption	170W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,DP

*Specifications subject to change without notice, not responsible for typographical errors.


IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option)

MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

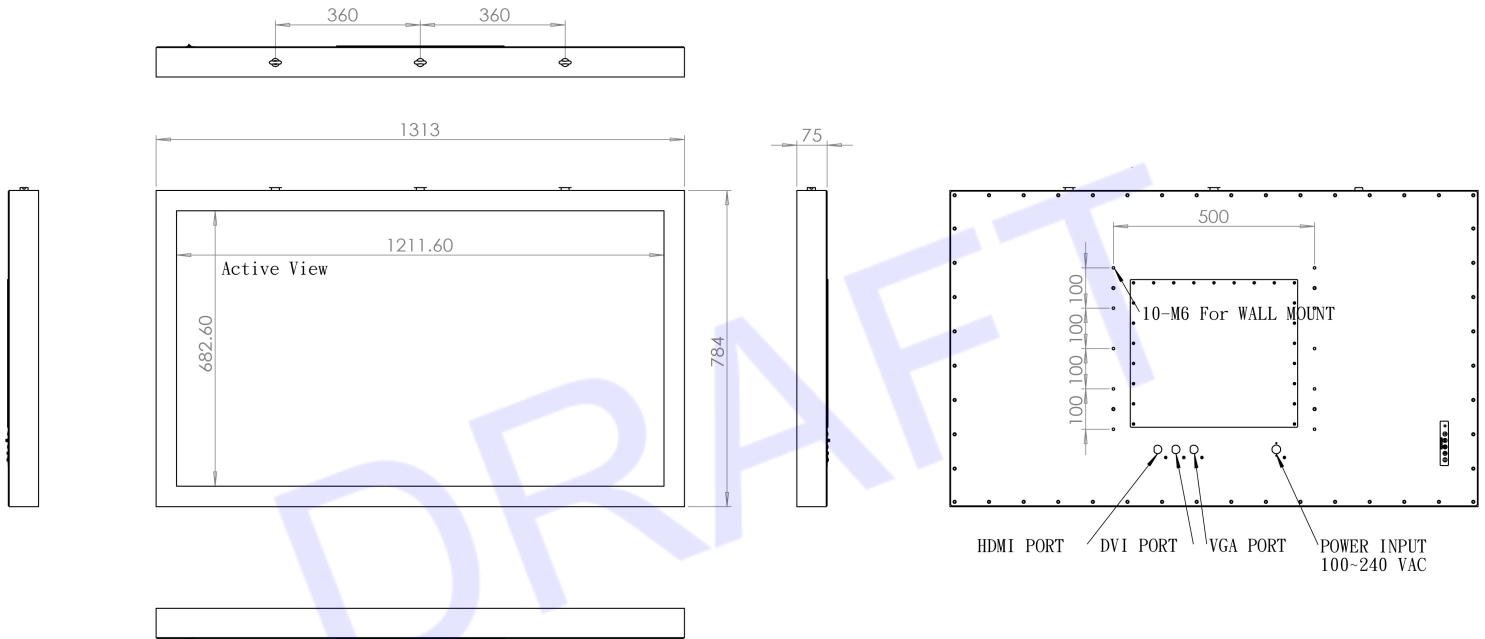

Drawing No.: CCHW5500-SIP-07282022-V1