

**10.4" High Brightness Industrial Panel Stainless Enclosure with Full IP66
1024x768 / 1000nits, -20C ~ 70C, VESA mount, Tempered AR or AG
glass**

*Remark: This unit designed to be installed under completed shaded area without direct sunlight. Not facing east and west
AUO Part no A104XVN01.0*



MODEL: CCH1040HB-SIP-24

**USB INPUT IS OPTIONAL
FOR TOUCHSCREEN**

FEATURES:

- High Brightness
- Full IP66
- High Contrast color TFT LCD Monitor support resolution up to (1024 x 768)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance
- I/O (All Connectors are Waterproof Connectors / 6ft long): HDMI and 24VDC with "+" / "-" Cable.


SPECIFICATIONS:

Viewable Size Image	10.4"
Active Display Area(mm)	213(H) x 159.50(V)
Pixel Pitch(mm)	0.0685 (H) x 0.2055(V)
Number of Pixels	1024x768
Contrast Ratio	1200:1 (typ.)
Display Color	16.2M
Brightness(cd/m ²)	1000 (typ.)
Viewing Angle(CR>=10)	-88~88(H);-88~88(V)
Synchronization Range Horizontal/Vertical	31.5~46.9KHz / 60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	HDMI
Power Source	24VDC with "+" / "-"
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

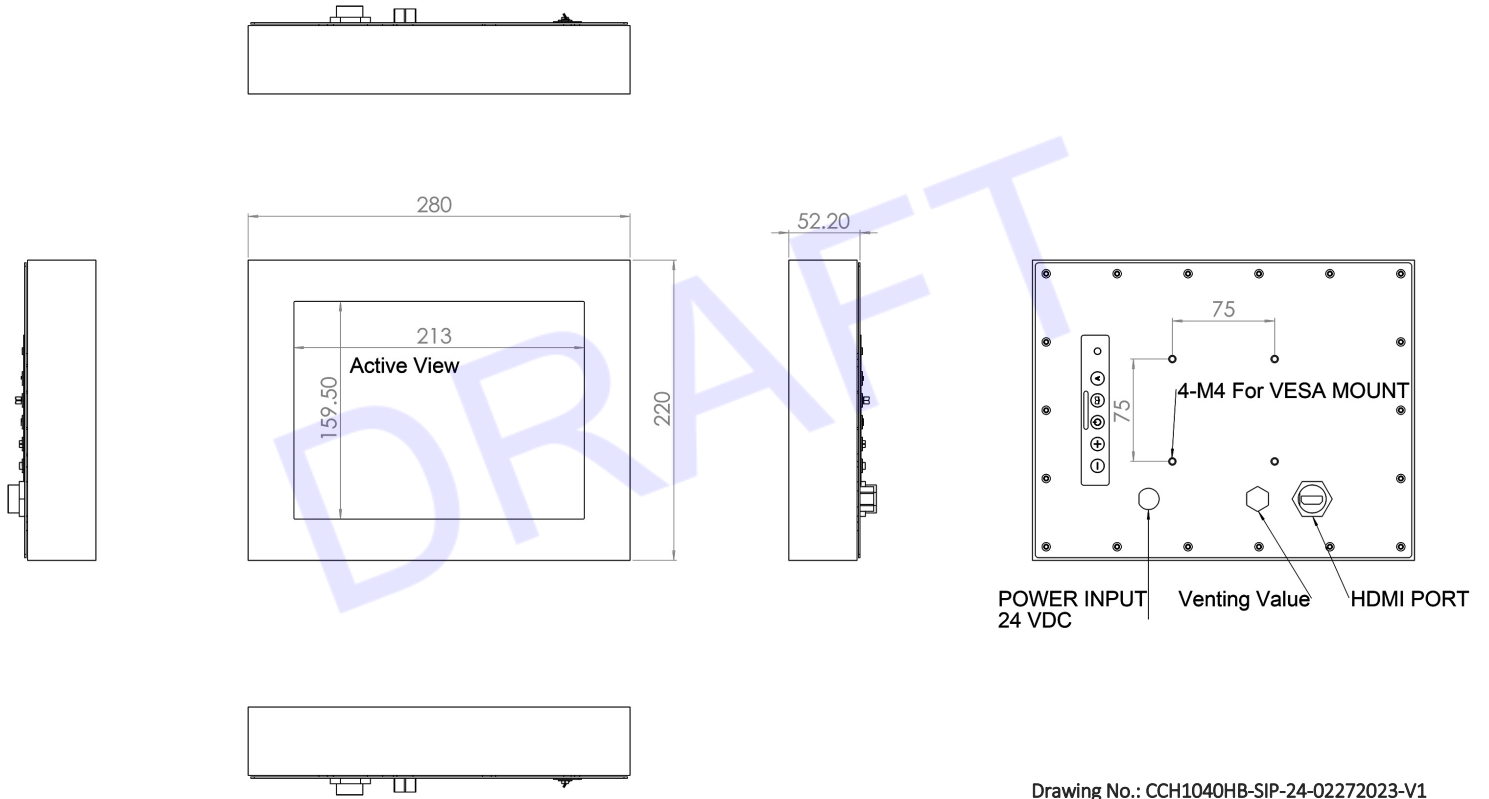

Drawing No.: CCH1040HB-SIP-24-02272023-V1