

Full IP65 Stainless LCD Monitor

High Brightness Rugged Completely Sealed Full IP66/NEMA4X
Stainless Steel Chassis/Surface Mount, 24" Brightness 1000nits, 1920x1080
based on Default 4 set waterproof connectors Waterproof connectors
& cables: HDMI+DVI+VGA & Power 6ft long only with external 100~240V AC
+ adapter 0 to 50 C Operating Temp

Model: CCHW2400HB-SIP



**USB INPUT IS OPTIONAL
FOR TOUCHSCREEN**

FEATURES:

- High Contrast color LCD Monitor with resolution up to XGA (1024x768)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance
- Full IP65 Stainless Design
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment

SPECIFICATIONS:

Display	Viewing Size Image	24"
	Active Display Area (mm)	535(H) x 302 (V)
	Pixel Pitch (mm)	0.276(H)x0.276 (V)
	Resolution	1920 x 1080
	Contrast Ratio	3000 : 1 (typ.)
	Color	16.7M(8 bits/colors)
	Brightness	1000nits
	Viewing Angle	-89~89(H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
Signal Connector	HDMI+ DVI+VGA	

Power	Source	External 100~240V AC + Adapter
	Consumption	45W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V, DV9V~36V
	Remote Control	YES
	IO	AV, DP


**Specifications subject to change without notice. not responsible for typographical errors.*

OPTIONAL: BNC Waterproof Connector



MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

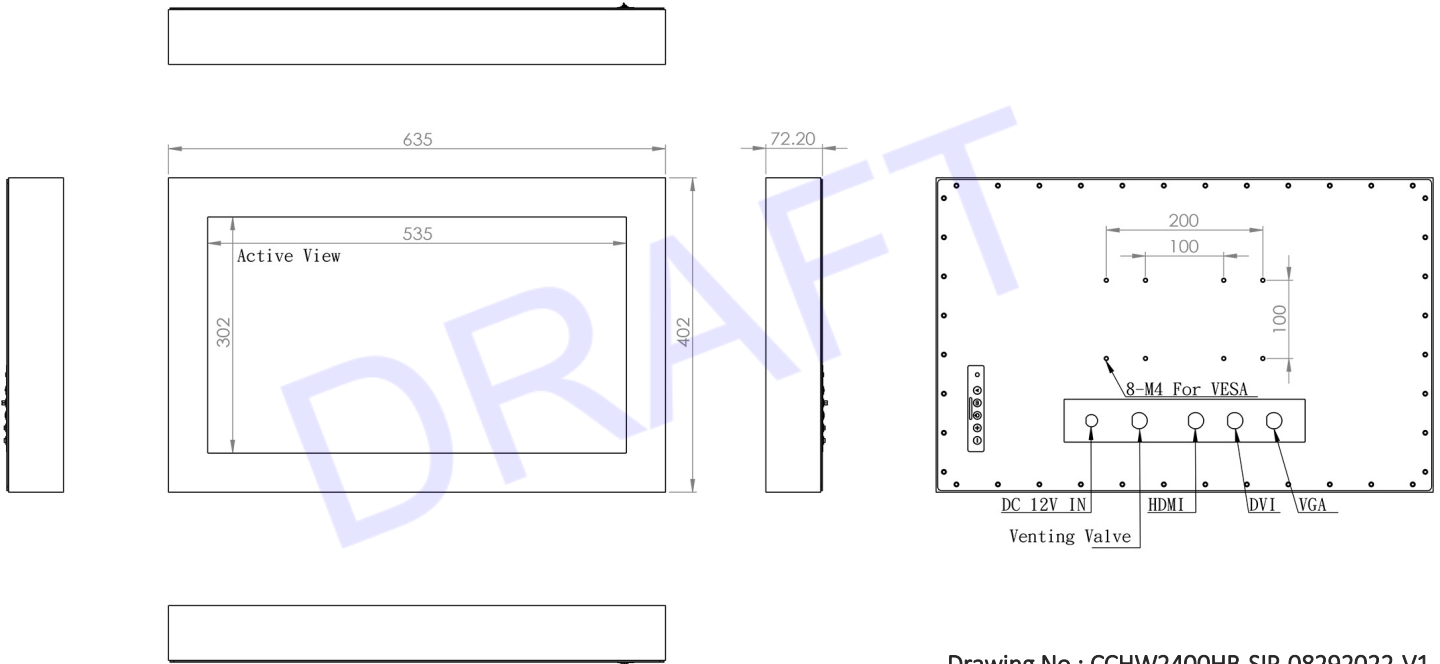

Drawing No.: CCHW2400HB-SIP-08292022-V1