



**24" LCD Monitor, 1920 x 1200, 250 nits, VGA+DVI+HDMI, Rear OSD, including /VESA Mount with 5 Wire Resistive Touch Screen and USB Controller**

**Model: CCHW2400X-TR**

**FEATURES:**

- High Contrast color TFT LCD Monitor support resolution up to FULL HD (1920 x 1200)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.
- Custom design by request.





**SPECIFICATIONS:**

Screen Diagonal	[mm]	611.32(24.07")
Active Area	[mm]	517 (H)x 322 (V)
Pixels H x V		1920(x3)x1200
Pixel Pitch	[mm]	0.270 (per one triad) x 0.270
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		AHVA mode, Normally Black
White Luminance	[cd/m <sup>2</sup> ]	250 (center, Typ) @ 60mA
Contrast Ratio		1000 : 1 (Typ)
Optical Response Time	[msec]	14 (Typ., on/off)
Power Supply Input Voltage (VDD)	[Volt]	+12V
Power Consumption	[Watt]	TBC (sim: LED 40.33(W) + LCD 4.8(W) (typ))
Weight	[Grams]	2500(Typ)
Physical Size (Hx VxD)	[mm]	546.4 (H)x 352.0 (V) x 18.1 (D) (Typ)
Electrical Interface		Dual channel LVDS
Surface Treatment		Anti-Glare treatment
Support Color		1.07B colors
Temperature Range	[°C]	0 to +40
Operating Storage (Non-Operating)	[°C]	-20 to +50
RoHS Compliance		RoHS Compliance

**APPLICATIONS:**



# MECHANICAL DRAWING:

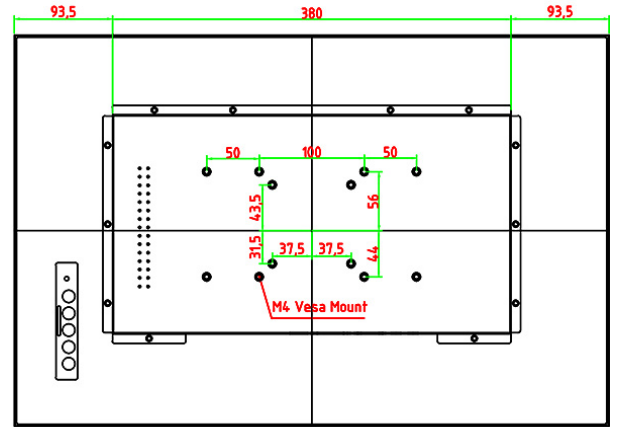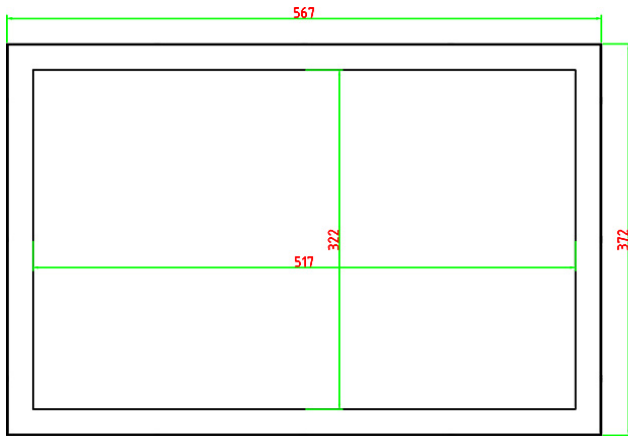

Touch USB Connector  
VGA Connector  
DVI Connector  
HDMI Connector  
AC110-240 power input

UNIT:mm