

**RUGGED COMPLETELY SEALED FULL IP66/NEMA4X
STAINLESS STEEL CHASSIS/SURFACE MOUNT**

46" Brightness 1500 nits, 1920x1080 based on Default 3 set waterproof connectors Waterproof connectors & cables: DVI,VGA & Power 6ft long only with built in 100~240V AC + adapter Wide Temp -20 ~ 50C Operating Temp
Remark: This unit designed to be installed under completed shaded area without direct sunlight. Not facing east and west



Model: CCHW4600HB2-SIP

FEATURES:

- High Contrast color LCD Monitor with resolution up to FULL HD (1920x1080)
- Completely Sealed FULL IP66/NEMA4X
- High Shock & Vibration Resistance
- Widely Application: Automation, Medical, Tourist, Transportation


SPECIFICATIONS:

Display	Viewing Size Image	46"
	Active Display Area (mm)	1018.08(H) x 572.67 (V)
	Pixel Pitch (mm)	0.53025(H)x0.53025(V)
	Resolution	1920x1080
	Contrast Ratio	4000 : 1 (typ.)
	Color	16.7 M(8bits+colors)
	Brightness	1500nits
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI
Power	Source	AC100V~AC240V
	Consumption	125W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,HDMI,DP

APPLICATIONS:



MECHANICAL DRAWING:

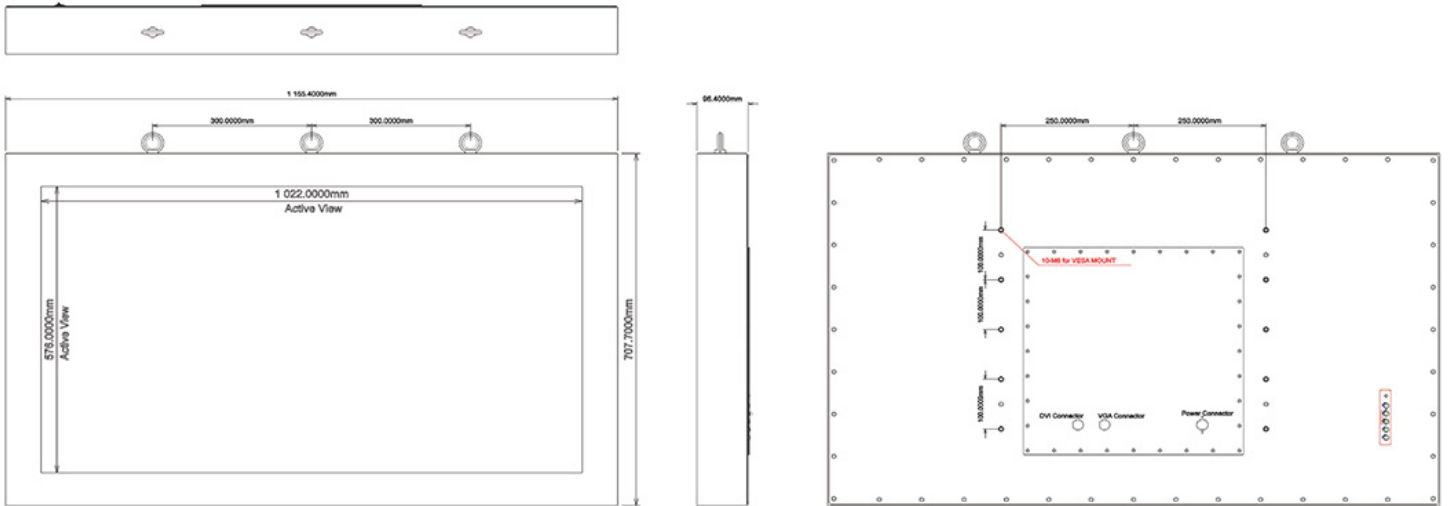

IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option for Touch)