

INDUSTRIAL OPEN FRAME LCD

10.4" Wide Open frame LCD Rear OSD with Rear Housing
400nits TFT LCD, 1024x768, VGA + DVI Input

Model: COP1040X



FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to XGA(1024x768)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.


SPECIFICATIONS:

Display	Viewing Size Image	10.4"
	Active Display Area (mm)	211.2 (H) x 158.4 (V)
	Pixel Pitch (mm)	0.264 x 0.264
	Resolution	1024 x 768
	Contrast Ratio	700 : 1 (typ.)
	Color	16.2M (8bits / color)
	Brightness	400 cd/m ²
	Viewing Angle	-80~80(H) ; -60~80(V)
	Recommended Resolution	1024 x 768 @ 60Hz, 75Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in, with External AC-DC Adapter(100-240V)
	Consumption	15W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

APPLICATIONS:



MECHANICAL DRAWING:

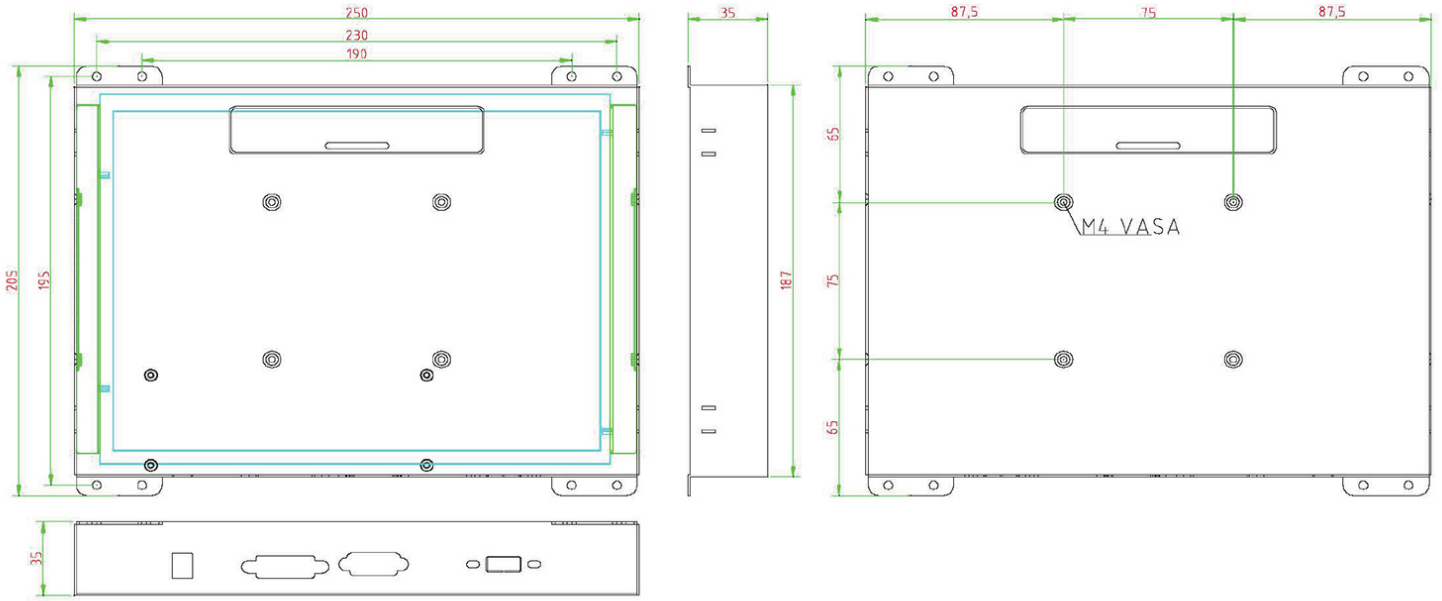

UNIT: mm