


# INDUSTRIAL OPEN FRAME LCD

12.1" Open frame LCD Rear OSD with Rear Housing  
500nits TFT LCD, 1024x768, VGA + DVI Input

Model: COP1210X

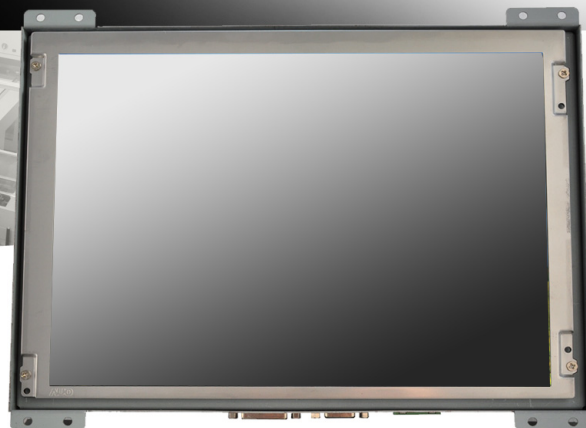

## FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to XGA(1024x768)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.

## SPECIFICATIONS:

<b>Display</b>	Viewing Size Image	12.1"
	Active Display Area (mm)	245.76 (H) x 184.32 (V)
	Pixel Pitch (mm)	0.204 x 0.204
	Resolution	1024 x 768
	Contrast Ratio	700 : 1 (typ.)
	Color	262K,16.2M (6bit/colors)
	Brightness	500 cd/m <sup>2</sup>
	Viewing Angle	-80~80 (H) ; -80~80 (V)
	Recommended Resolution	1024 x 768 @ 60Hz, 75Hz
	Signal Connector	VGA,DVI
	<b>Power</b>	Source
Consumption		20W typical, normal operation
Management		VESA DPMS Compliant
<b>Optional</b>	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

## APPLICATIONS:



# MECHANICAL DRAWING:

