

INDUSTRIAL OPEN FRAME LCD

20.1" Open frame LCD Rear OSD with Rear Housing
300nits TFT LCD, 1600x1200, VGA + DVI Input

Model: COP2010



FEATURES:

- High Contrast color LCD Monitor with resolution up to UXGA (1600x1200)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.


SPECIFICATIONS:

Display	Viewing Size Image	20.1"
	Active Display Area (mm)	432.0 (H) x 331.5 (V) x 25.0 (D)
	Pixel Pitch (mm)	0.255 (H) x 0.255(V)
	Resolution	1600 x 1200
	Contrast Ratio	800 : 1 (typ.)
	Color	16.7M (8bits/colors)
	Brightness	300 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1600 x 1200 @ 60Hz
	Signal Connector	VGA,DVI
	Power	Source
Consumption		60W typical, normal operation
Management		VESA DPMS Compliant
Optional	Touch	Resistive, PCAP ,IR
	High Brightness	YES
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

APPLICATIONS:



MECHANICAL DRAWING:

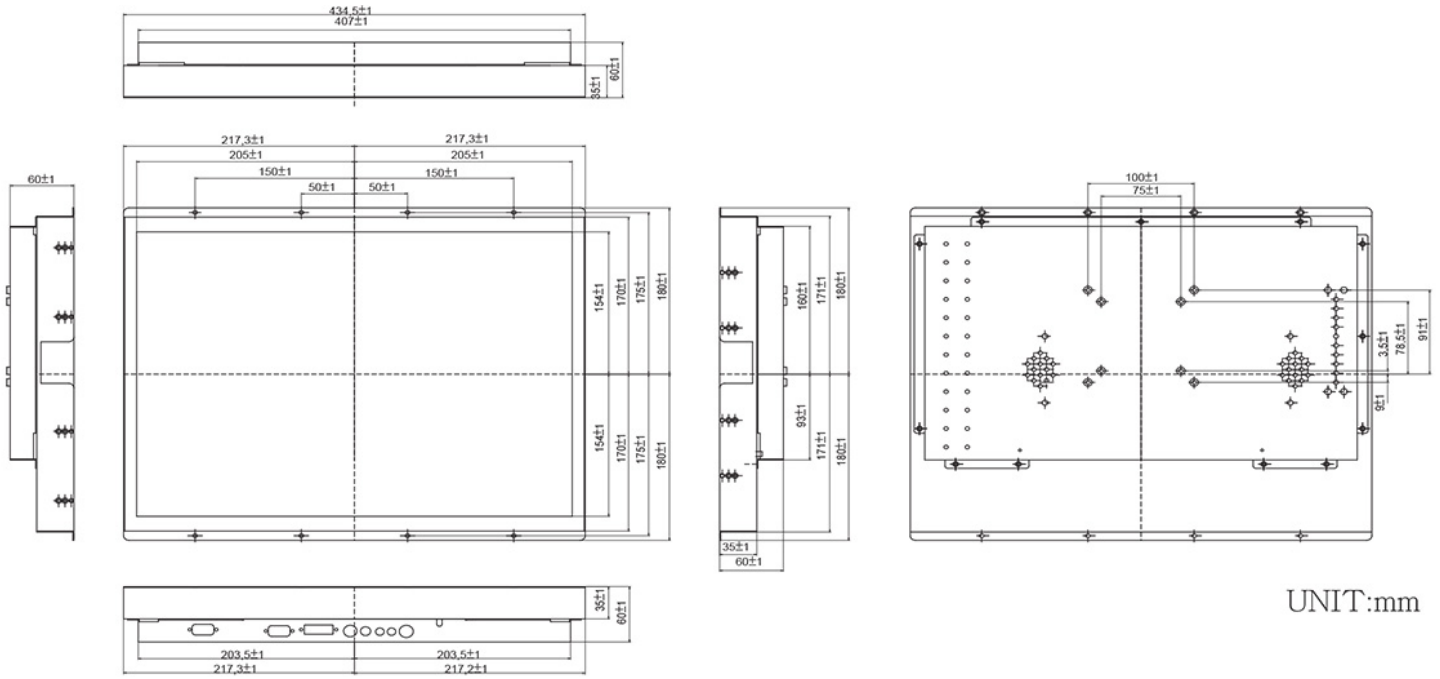

UNIT:mm