

IP65 FRONT PANEL PC (Metal-5mm)



12.1" LCD monitor, 1024x768, LED-350nits, Rear OSD, including rear screw/Clamp/VESA Mount, WV(160°/160°), WT(-30~80C), 12VDC-IN w/Adapter with Projective Capacitive Touch Screen + MS-98E1 (H110 SKU) / i7-7700 / RAM 8GB (0C~70C) / HDD 1TB (0C ~70C)

MODEL: CPM1210XWV-i7- PCAP



FEATURES:


- Modularize mechanical design provides flexible product configuration and easy maintenance
- Optional build-in touch screen for interactive application
- 2 independent displays with multiple video outputs (LVDS, HDMI, DVI-D, VGA)
- Supports DirectX 11.1 and Intel® Clear Video Technology (up to 1080P)
- 3 SATA 3.0 ports for faster and high-capacity storage
- Supports m-SATA function by Mini-PCIe slot
- Plenty USB ports for more peripherals(USB3.0*4, USB2.0*4, Vertical Type USB2.0*1)

SPECIFICATIONS:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ratio / Size	4 : 3 / 12.1" viewable diagonal area
	Active Area / Pixel Pitch	245.8(H) x 184.3(V) mm / 0.24(H) x 0.24(V) mm
	Native Resolution / Colors	1024(H) x 768(V) / 16.2 M
	Brightness / Contrast	350 cd/m2 (typ) / 550 : 1
	Response Time	< 25 ms
	Viewing Angle (typical)	H. 160° (- 80° ~ + 80°) , V. 160° (- 80° ~ + 80°)
	Light Source	LED backlight, Long life, 35,000 hrs (typ)
Power	Power Input	12V DC input with adapter
	Power Consumption	35.75 Watt,
Operating Condition	Temperature / Humidity	-30°C ~ 80°C (22°F ~ 176°F) , 10% ~ 90% (no condensation)
Dimensions	Physical	Please refer to Drawing
	Carton	W x H x D = TBD

Options	Touch	Video / TV	Enhanced Panel	Others
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Capacitive touch	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming

MS-98E1 MB Specifications

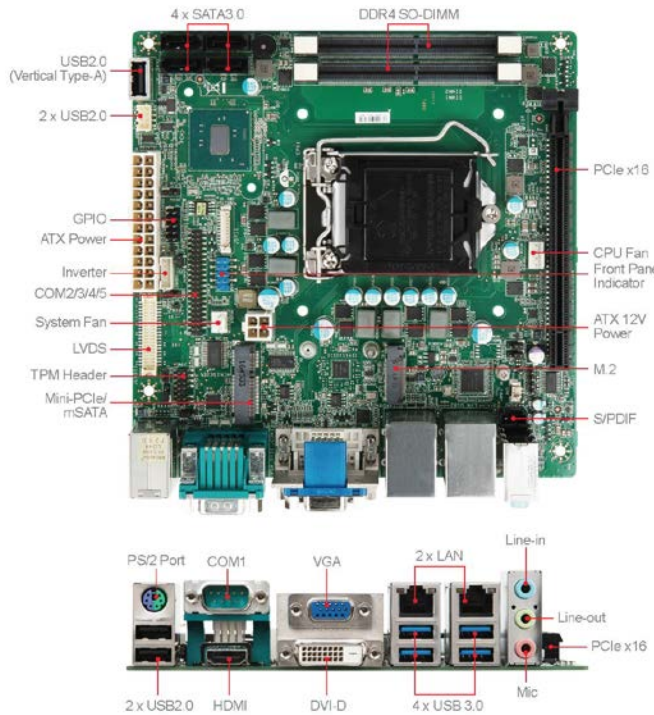

Processor	CPU	Intel Core i7-7700
	Frequency	2.3GHz- 4.0GHz (Depends on CPU)
	L2 Cache	2M - 8M (Depends on CPU)
	CPU Type	Socket (LGA 1151)
	Chipset	Intel® H110 Express
Memory	BIOS	AMI
	Technology	Dual-channel DDR4 (non-ECC) 2133MHz/2400MHz (7th Gen)
	Max. Capacity	Up to 32 GB
Display	Socket	2 x 260-pin SO-DIMMs
	Controller	Intel® HD Graphics
	Graphic Memory	Shared system memory up to 1.7 GB SDRAM
	LVDS	1
	eDP	N/A
	VGA	1
	DVI	1 (DVI-D)
	HDMI	1
	Display port	N/A
	Multiple Display	2 independent displays
Ethernet	Display Interface	LVDS up to 1920 x 1200 HDMI up to 3840 x 2160 DVI-D up to 1920 x 1200 VGA up to 1920 x 1200
	Controller	1 x Intel® I219-LM GbE-PHY 1 x Intel® I211-AT PCIe GbE LAN (Co-lay I210-AT)
Audio		Realtek® ALC887 HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer Yes
	Smart Fan	Yes
TPM	Controller	Pin header
I/O Interface	USB	4 x USB 3.0 (4 x rear) 4 x USB 2.0 (2 x rear; 2 x internal) 1 x USB 2.0 (Vertical, internal)
	Serial	5 x COM (1 x rear; 4 x internal) COM1: RS-232/422/485, 0V/5V/12V COM2/3/4/5: RS-232, 0V/5V/12V
	Parallel	N/A
	PS/2	1
	GPIO	8-bits (4 x GPI, 4 x GPO), 5V
Expansion Slot	PCIe x 16	1
	M.2	N/A
	Mini-PCIe	1 x Full-size, mSATA
Storage	SATA	3 x SATA 3.0
	mSATA	1 (shared w/ Mini-PCIe)
Power Supply	DC	N/A
	ATX	ATX-Power 24P, 12V-4P
Environment	Operating Temperature	0 - 60°C
	Operating Humidity	10 - 90%, non-condensing
	Storage Temperature	-20 - 80°C
	Storage Humidity	10 - 90%, non-condensing
Form Factor	Dimension	170mm x 170mm (Mini-ITX)
	Weight EMC	0.37 kg
Certification	EMC	FCC, CE, RCM, VCCI, BSMI
Software Platform	OS Support	Windows 7 (32/64-bit) Windows 8.1 (64-bit) Windows 10 (64-bit) Linux Kernel 4.X, support Fedora 23(64Bit) & Ubuntu 16.04 (64Bit) of Kaby Lake-S & Skylake-S



MECHANICAL DRAWING:

