

# 1U RACK MOUNT FULL HD

Wide 17.3" 1U Rackmount LCD keyboard 1920 x 1080

Model: DKPW117HD-Fe




## FEATURES:

- Support 1920 x 1080 full HD resolution
- Provide front USB port to easy data access
- Various keyboard options
- Upgrade options: Analog KVM switch, IP KVM switch, CAT5 KVM switch, USB Hub KVM switch

## SPECIFICATIONS:

<b>Number of ports</b>	1
<b>Dimension</b>	468.9 x 482.0 x 44.0 mm / 18.5 x 19.0 x 1.7 inches
<b>Package Dimension</b>	606 x 551.5 x 230 mm / 23.9 x 21.7 x 9.0 inches
<b>Net Weight</b>	13 Kg / 28.7 lbs
<b>Gross Weight</b>	20.5 Kg / 45.2 lbs
<b>Display Size</b>	17.3 inches Full HD
<b>Panel Type</b>	TFT LCD
<b>Resolution Capabilities</b>	Maximum Resolution up to 1920 x 1080 (Full HD)
<b>Pixel Pitch</b>	Supports 0.198 mm x 0.198 mm
<b>Viewing Angle (CR&gt;10)</b>	Right-Left view 140°(Typ) Up-Down View 120°(Typ)
<b>Contrast Ratio</b>	650 : 1
<b>Brightness</b>	White 300 cd/ m <sup>2</sup>
<b>Back Light</b>	DualLamps for Back Light
<b>Supported Colors</b>	16.7M Colors (8-bit with FRC)
<b>Response Time</b>	Rising Time 2 ms, Decay Time 6 ms
<b>Operating System</b>	Dos, Unix, Linux, OSX, Windows ( XP, 7, 8, Server 2012 R2)
<b>Multi Platform</b>	Support PS/2 and USB
<b>System Cables</b>	VGA + PS/2 x 2 or VGA + USB x 1 cable
<b>Keyboard Mouse</b>	106 key PS/2 keyboard with touch pad
<b>Sync</b>	45 ~ 80 KHz
<b>Power Source</b>	100 ~ 240 VAC input
<b>Power Consumption</b>	Total 8.3W (Max.) @ cell 1.9W (Max.), BL 6.4W (Max.)
<b>Temperature</b>	Operate 0 ~ 50°C / 32 ~ 122°F Storage -20 ~ 60°C / -4 ~ 140°F
<b>Humidity</b>	10% ~ 90% RH
<b>Chassis Construction</b>	Heavy duty steel materials
<b>Keyboard Language</b>	US, UK, German, French, Spanish, Italian, Dutch, Portuguese, Swiss, Belgium, Swedish, Norwegian, Danish, Russian, Hebrew, Arabic, Japanese, Mandarin

## APPLICATION:

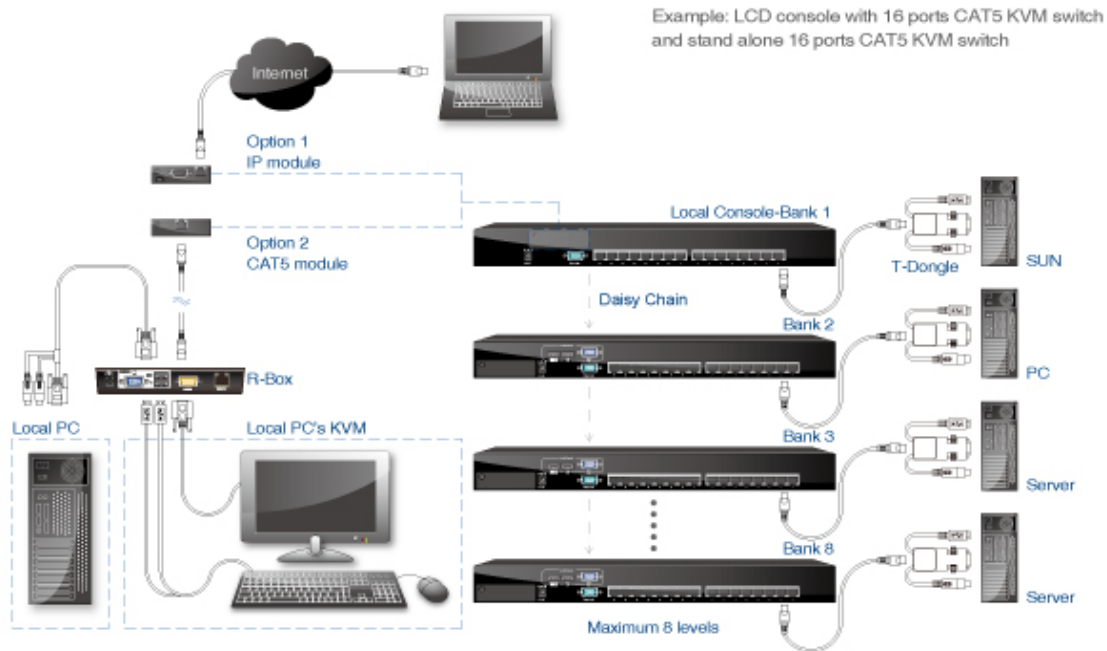

## DRAWINGS

