

1U RACK MOUNT FULL HD

Wide 19" 1U Rackmount LCD keyboard 1440 x 900

Model: DKPW119-Fe




FEATURES:

- Support 19" wide-screen LCD panel.
- Provide front USB port to easy use. (optional)
- Scalable from single port LCD console to multiple ports all in 1U form factor.
- Informational keyboards option.
- Upgrade options Analog KVM switch, IP KVM switch, CAT5 KVM switch.

SPECIFICATIONS:

System Connections	1
Dimension	526.0 x 482.0 x 43.8 mm / 20.7 x 19.0 x 1.7 inches
Package Dimension	827 x 564 x 206 mm / 32.6 x 22.2 x 8.1 inches
Net Weight	14.0 Kg / 30.9 lbs
Gross Weight	21.5 Kg / 47.4 lbs
Display Size	19 inches wide-screen
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Max. up to 1440 x 900 (WXGA)
Pixel Pitch	Supports 0.283 mm x 0.283 mm
Viewing Angle(CR>10)	Right-Left view 90° (Typ) Up-Down View 65° (Typ)
Contrast Ratio	700 : 1
Brightness	White 200 cd/m ²
Back Light	Dual Lamps for Back Light
Supported Colors	16.7M Colors (RGB 6-bit + HI_ FRC)
Response Time	Rising Time 3.6 ms, Decay Time 1.4ms
Operating System	Dos, Unix, Linux, OSX, Windows (XP, 7, 8, Server 2012 R2)
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin 2 x PS/2 Mini Din 6 pin 1 x USB 1 x PS/2-USB switch 1 x DC Jack 1 x RR4 36 pin socket for modular KVM switch
System Cables	KC-0303 (for PS/2 keyboard mouse use) KC-0303 & USB A-A (for USB keyboard mouse use) DVI + PS/2 DVI + USB
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	15.5 W
Temperature	Operate 0° ~ 50°C / 32° ~ 122°F Storage -20° ~ 60°C / -4° ~ 140°F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Hebrew, Norwegian, Danish, Japanese, Mandarin, Russian, Arabic

APPLICATION:

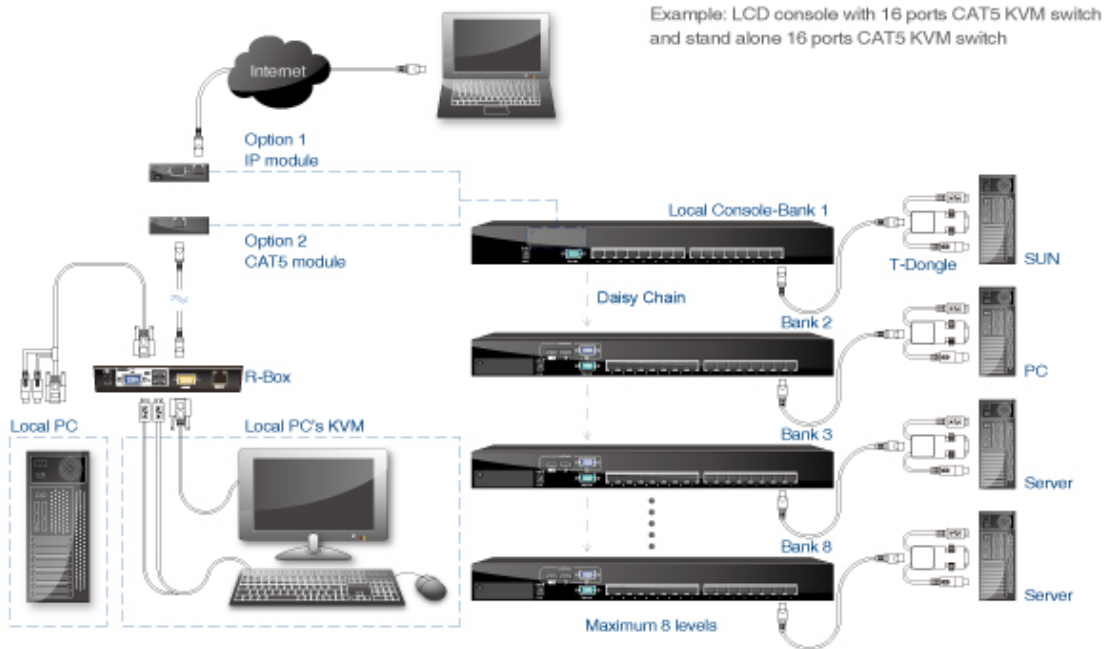

DRAWINGS

