



DRP2W2150/DRP3W2150 Series

INDUSTRY FIRST 21.5" QUAD-HEAD!


FEATURES:

- 3U/4U 26" Rugged Deep 19" Rack Mount Supporting up to Four 21.5" LCDs
- 1920x1080 Full HD LED Backlit Displays
- New Unified Button Board Design for Independent or Simultaneous LCD Control
- High Bright and Touch Screen Options Available



OPERATIONAL TRANSITION:


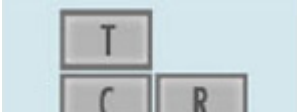


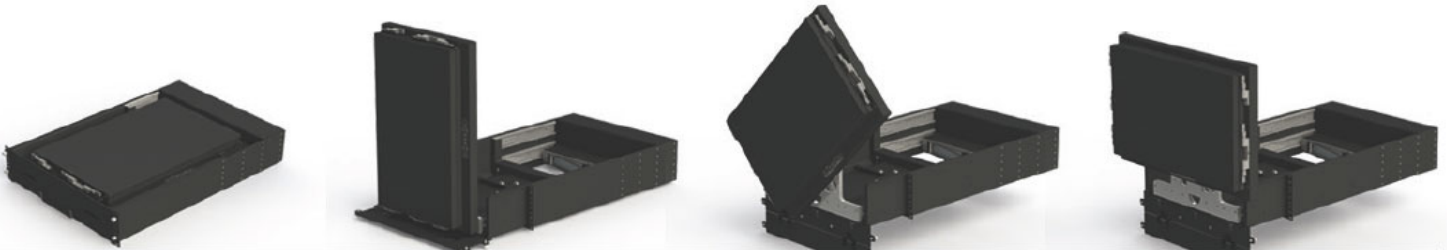




Stowed Mode > Operation Mode



CONFIGURATION:

OVER 9 DIFFERENT ORDERING CONFIGURATIONS GIVING YOU AN ABUNDANCE OF OPENING POSITIONS



 <p>3 PANEL OPTION Left - Center - Right</p> <p>Model: DRP3W1700A DRP3W2150A</p>	 <p>3 PANEL OPTION Top - Center - Right</p> <p>Model: DRP3W1700B DRP3W2150B</p>	 <p>3 PANEL OPTION Left - Center - Top</p> <p>Model: DRP3W1700C DRP3W2150C</p>
 <p>2 PANEL OPTION Top - Center</p> <p>Model: DRP2W1700A DRP2W2150A</p>	 <p>2 PANEL OPTION Center - Right</p> <p>Model: DRP2W1700B DRP2W2150B</p>	 <p>2 PANEL OPTION Left - Center</p> <p>Model: DRP2W1700C DRP2W2150C</p>
 <p>2 PANEL OPTION Top - Bottom</p> <p>Model: DRP2W1700D DRP2W2150D</p>	 <p>1 PANEL OPTION Center Horizontal</p> <p>Model: DRPW2150A</p>	 <p>1 PANEL OPTION Center Vertical</p> <p>Model: DRPW2150B</p>

SPECIFICATIONS:

ENCLOSURE

- 3U/4U 26" Deep Rugged 19" Rack Mount
- 1,2 or 3 Screens Available in 3U; Quad in 4U Only
- New Unified Button Board Design For Independent or Simultaneous LCD Control
- Heavy Duty Friction Slides
- Integrated Cable Guide
- Gas Spring Supports
- Convenient Fold-up Front Face
- Robust Torque Hinges
- 90 Degree Mechanical Swivel
- XLR Quick-Disconnect Power Cord

VIDEO CONTROLLER

- Latest Generation LCD Controller
- Support For Digital Picture-In-Picture
- Flexible Video Options
 - VGA, DVI, CVS(2x), YPbPr, HDMI
 - Dual or Single Channel 3G HD/SD-SDI (Optional)

DISPLAY >>Touch Screen & High Bright Options Available

- 21.5"W FHD 1920x1080 LED Backlit Displays
- 250NITS Brightness
- Ultra Wide Viewing Angle 178/178
- 16.7M Colors
- 1000:1 Contrast Ratio
- Response Time 8ms G to G

ADDITIONAL SPECS

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none">• Operating Temperature: 0-50c• Storage Temperature: 20-60c• Dimensions<ul style="list-style-type: none">- Single/Dual/Triple: 5.25"H (3U) x 19"W x 26"D- Quad: 7"H (4U) x 19"W x 26"D• Weight (Approx.)<ul style="list-style-type: none">- Single: 50 lbs- Dual: 61 lbs- Triple: 70 lbs- Quad: 85 lbs | <ul style="list-style-type: none">• Power Consumption (Approx.)<ul style="list-style-type: none">- Single: 35 W- Dual: 70 W- Triple: 105 W- Quad: 140 W |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

