




**Model: DOD1200AV**

# 12.1" Rugged All-Weather Sunlight Readable LCD

i-Tech's harsh-duty All-Weather Monitor (AWM) is a flat panel display, engineered to survive the most demanding applications. Designed to be rugged, the AWM handles a wide-range of extreme environments making it the industry choice for mobile applications. Housed in a milled billet aluminum case, the slim-profile AWM is light weight and watertight, with fully sealed connectors. Front-mounted controls and the optional touch screen make the monitor user-friendly. The AWM incorporates the latest optical engineering to achieve optimum viewability in all lighting conditions, including direct sunlight. The AWM's power efficient, low heat design results in the increased reliability and longevity required for mission critical deployment.



- 1 BNC Input
- 2 S-Video Input
- 3 Power Input



IP67 Sealed Cable (NEMA 6P)

**NOTE: BNC and S-Video Cables are not included**

### Standard Features

- Auto Sensing NTSC/PAL
- Video Input (BNC and S-Video)
- 12.1" TFT AM LCD SVGA (800 x 600)
- Brightness Range 5-800 nits
- Transflective Enhancement
- Antireflective/Antiglare Surface Treatments
- 3 Button OSD User Interface
- Milled AL Case, sealed to IP67 NEMA 6P Standard
- Black Anodized Finish
- IP67 Anti-Corrosion Metal Sealed Connectors
- Wide Range Input (8-30 VDC)
- Protected against an Internal Short Circuit, Load Dump, Over Voltage and Reverse Polarity
- 20 Watts Maximum Power Consumption

### Optional Features

- Night Vision Goggle Filter (MIL-STD-3009)
- Flush Mount Bezel, IP67 Sealed
- Internal Heaters for operating to -40°C (-40°F)
- External VAC Power Supply

### Specification

Technical		
Display	12.1" TFT AM, SVGA, LCD, 256K Colors	
Sunlight Readable	800 nits, Transflective, AR /AG	
Dimming Ratio	100:1	
Video Input	NTSC/PAL (B, D, G, I, K)	
Connectors	BNC, S-Video and Power	
Housing	Milled Aluminum, Black Anodized, UV Clear Coat	
Mounting	Panel Mount or RAM Mount	
Power Consumption	6 Watts Min - 20 Watts Max	
Wide Range DC Power Input	8-30 VDC (12, 24, 28 VDC nominal)	
Power Conditioning	Internal Short Circuit Protection Load Dump Protection Over Voltage Protection Reverse Polarity Protection	
Environmental		
Operating temperature	0°C to 60°C (32°F to 140°F)	
Operating temp. w/ Heater Option	-40°C to 60°C (-40°F to 140°F)	
Storage temperature	-40°C to 75°C (-40°F to 167°F)	
Shock	50 G	
Vibration	5.8 G (5-500 Hz)	
IP rating	IP67 (NEMA 6P Submersible)	
Humidity	0-100%	
EMI	Designed to Meet FCC B, CE	
Altitude	45,000 ft.	
Dimensions		
	MILLIMETERS	INCHES
Height	234 mm	9.20"
Width	331 mm	13.00"
Depth (Main Case)	27 mm	1.05"
Connector Pod Depth	29 mm	1.12"
Weight	2.7 kg/ 6.0 lbs	
Cables		
Included	Power	
Not Included	BNC, S-Video	



**Toll Free: 1-888-itech-18 USA Phone: 1-510-429-9288 Fax: 1-510-372-2736**

**E-mail: sales@i-techcompany.com 30081 Ahern Ave Union City, CA 94587 USA**



www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com



Model: DOD1200AV

# 12.1" Rugged All-Weather Sunlight Readable LCD

## Mechanical drawing

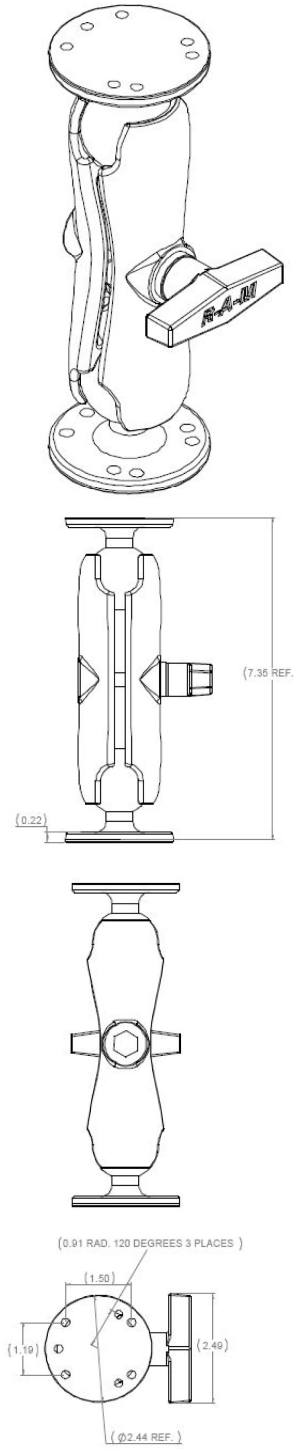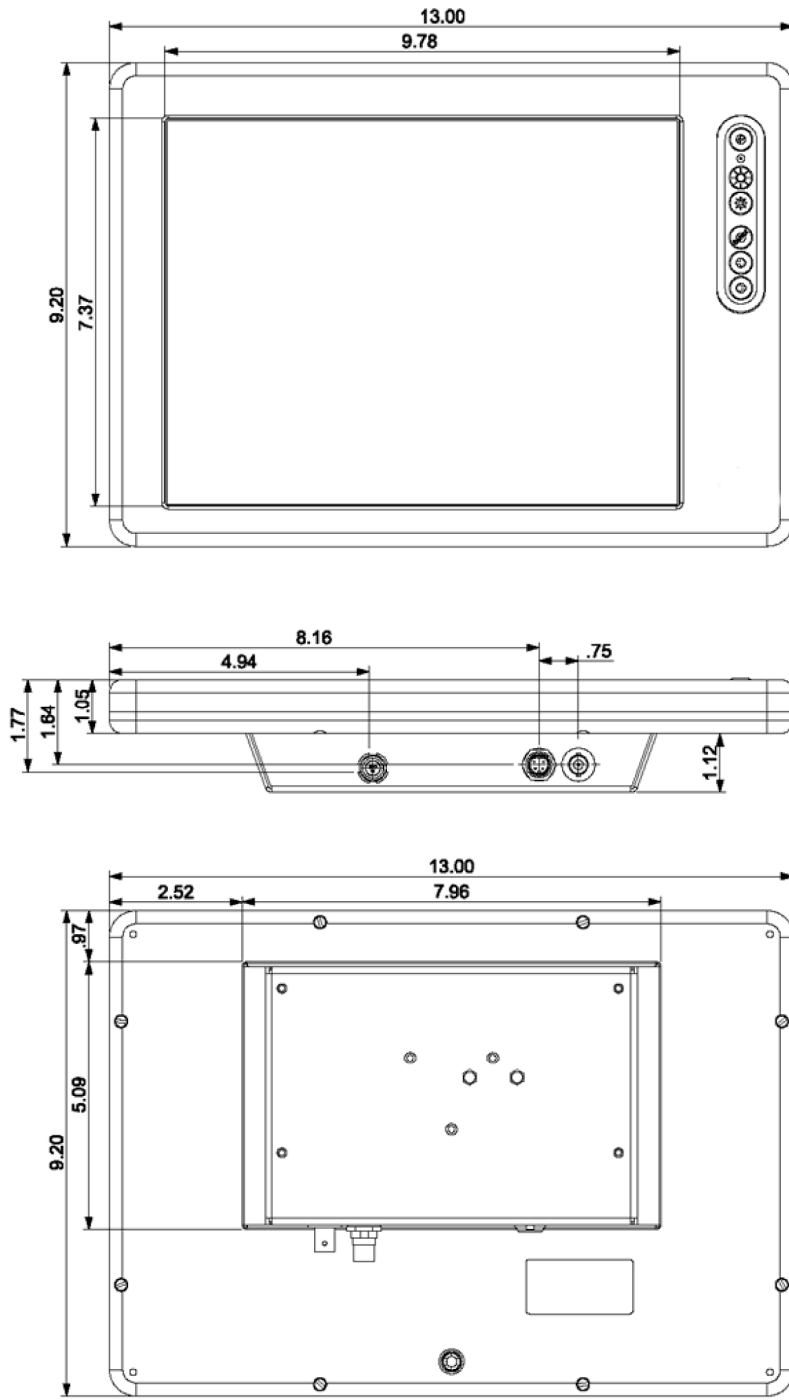

**Toll Free: 1-888-itech-18 USA Phone: 1-510-429-9288 Fax: 1-510-372-2736**  
**E-mail: sales@i-techcompany.com 30081 Ahern Ave Union City, CA94587 USA**

www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com