

# DU-5K-NI

## Nonincendive Keyboard with HulaPoint II™

iKey manufactures devices to reduce risk of failure in your hazardous areas. The nonincendive DU-5K-NI is designed to meet NEMA 4X specifications. It features 116-key functionality, including 24 function keys, and an ABS polycarbonate case. It has a Factory Mutual approval of Class I, Division II. These units do not require barriers and are ideal for harsh working conditions. An upgraded HulaPoint II™ pointing device is integrated into the DU-5K-NI, which offers improved sensitivity and increased durability. All units ship with bulkhead cables.



### Technical Specifications

Certifications	NEMA 4X UL60950, FCC Part 15 Class B Factory Mutual Class I, Division II
Shock	3x11 ms pulses of 50g on each of 3 axes
Cable	LENGTH: 5 feet from keyboard to Bulkhead Connector DESIGN: 2 separate cables on PS/2 or single-cable USB
Key Switch	MATERIAL: Industrial silicone rubber LIFE: 10 million cycles TRAVEL: 0.055 in. (1.4mm) ACTUATION FORCE: 6.35 oz +/- 1.06 oz (200g +/- 30g) FEEDBACK: Tactile with mechanical snap
Vibration	POWER SPECTRAL DENSITY: 0.04g/Hz FREQUENCY RANGE: 20Hz - 2 kHz DURATION OF TEST PER AXIS: 3 hours
Power	KEYBOARD: 5V@ 10 ma (from CPU port) HULAPOINT: 5V@ 10 ma (from mouse conn. port)
Flammability	PRINTED CIRCUIT BOARD: 94 VO SILICONE OVERLAY: 94 HB INTERFACE CABLE: 94 VO
Compatability	PS/2 KEYBOARD/HULAPOINT: All Windows Operating Systems USB KEYBOARD/HULAPOINT: All Windows and Macintosh OS
Temperature Range	STORAGE: -40C to +70C (-40F to +158F) OPERATING: -20C to +60C (-4F to +140F)
Weight	2.6 lbs +/- 0.10 lbs (1.7 kg +/- 0.05 kg)
Warranty	1 year limited warranty
Humidity	100%
Dimensions	14.94" x 6.63" x 1.81" (w-h-d) 379.5mm x 168.4mm x 46mm
Model Numbers	

### Features and Benefits


- 10-Key Numeric Pad
- 24 Function Keys
- Polycarbonate Case with Mounting Holes
- 116-Key Functionality
- Integrated HulaPoint II Pointing Device
- PS/2 or USB configurations available

DATE	CHANGES	INTL	REV
12.19.11	Original	JW	1.0

# DU-5K-NI

Hazardous (Classified) Location

Non Hazardous (Unclassified) Location

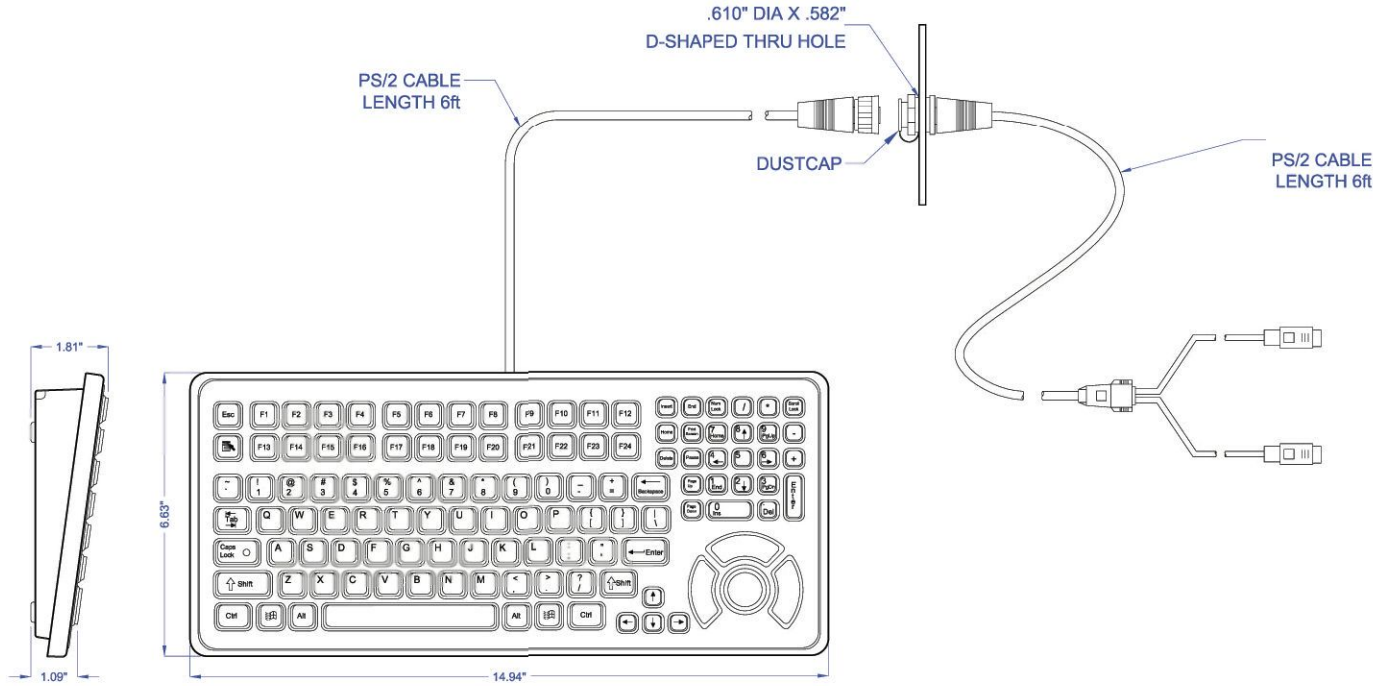

**KEYBOARD SPECIFICATIONS:**

**KEY SWITCH**

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

**POWER**

Reference Drawing Number HL0003 for Power Requirements  
 Installation shall be in accordance with NEC, Article 504,  
 ANSI, NFPA 70

**TEMPERATURE RANGE**

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

**HUMIDITY**

100% Humidity Resistant

**VIBRATION**

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

**SHOCK**

3 X 11 ms pulses of 50g on each of 3 axis

**WEIGHT**

2.6 lbs +/- 0.10 lbs (1.7 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

NOT TO SCALE

Part Number: DU-5K-NI	Drawing Number: MKT0301	Sheet: 1 OF 1	
Drawing Title: DU-5K-NI-MKT	Revision: 1.0	Date: 12.19.11	JMW



Distributed by:  
 i-Tech Company LLC  
 TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)