

# 1U Rack mount Dual Slides 15" TFT LCD monitor keyboard drawer / KVM switch

**Model: NVP 1015,  
NVP1015-801& NVP1015-1601**

## Monitor Features:

- **Unique mechanical design** to maximize rack mountable space
- **Unique monitor flip up design** allows viewing through closed glass door of cabinet
- **Adjustable mounting brackets** from 15.4" to 31.1" (390 to 790 mm) (front to rear 19" mounts). Suitable for 30" to 39.4"(750 to 1000mm) deep 19" cabinet
- Keyboard with GlidePoint touch pad mouse
- **Built-in on screen display** controlled by integral membrane switches
- Standard D-sub 15-pin VGA input connector
- Supplied with 12V 5A remote power adapter
- **All mounting hardware included**



## With KVM Features only:

- **Multi-platform-mix** PCs, SUNs, IBMs, HPs, Compaq & DELL
- **Support 8 characters password protection** & search PC server name
- **Cascades for use with up to 128 servers**
- New keep alive feature safeguards server for power loss to the switch
- **Built-in microprocessor** emulation for each port boots up process
- **Auto scan-mode** for monitoring your servers at intervals 5 to 99s
- **Hot-pluggable** when adding or removing PC w/o powering down the switch
- Name you server up to **16 characters long**
- Supplied w/12V 1A remote power adapter(single power source)
- **Supplied with 8 screened cables 6ft long**
- **No software needed & all mounting hardware included**

## Specification

### Monitor

Panel:	15" LCD panel
Display type:	TFT / LCD active matrix color
Resolutions:	1024 x 768
Response time:	Tr=5ms/ Tf=20ms
Contrast ratio:	300 : 1 typical
Brightness:	250 cd/m <sup>2</sup> typical
Pixel pitch:	0.297mm (H) x 0.297mm (W)
Panel color:	16.7 million display colors
Viewing angle:	130° (Horiz.)/ 110° (Vert.)
Storage temp.	-25° C to 60° C
Operating temp.	0° C to 50° C
MTBF	35,000 hours

### Power supply

Remote adapter:	110V – 220V AC Input 12V 5A Output
Adapter Size:	4.3"(L) x 2.4" (W) x 1.2"(H) (108x61x30mm)
Cable length from mains plug to adapter:	6ft (180cm)
Cable length from adapter to unit:	6ft (180cm)
Safety approval:	UL, CE

Mains plug options available

### KVM

Computer connectors:	8/16
Connector:	15-pin HDB type, Keyboard, mouse, all-in-1
Cascade level:	8
Max. access PCs:	128
Input VGA resolution:	1,920 x 1,440

### Weight

Model No	KVM	Net/ Gross weight
NVP1015e	Non	22.0 lbs / 39.6lbs(10 kg/18kg)
NVP1015-801e	8	24.2 lbs / 44.0 lbs(11kg/20kg)
NVP1015-1601e	16	26.4 lbs / 46.2 lbs(12kg/21kg)

### Keyboard Selection:



1: Notebook type keyboard with touch pad mouse

**Product dimension**--- 17.3"(W) x 1.75"(H) x 25.6"(D) (439x4.45x650mm)


**Packing dimension**--- 28.96"(L) x 22.66"(W) x 7"(H) (735x575x180mm)

### Construction

- |   |  |
|---|--|
| 1. Class A active matrix TFT LCD panel      | 6. Inverter                                |
| 2. Rear metal case                          | 7. Ball bearing telescopic slides          |
| 3. 8 or 16-port KVM control board           | 8. 8-push-button channel selector switches |
| 4. Adjustable mounting bracket              | 9. Front cover                             |
| 5. Analog-to-digital signal converter board | 10. Panel button control                   |
|   | 11. Front metal case                       |

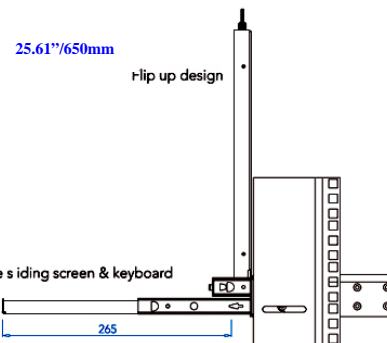

Unit : mm



KVM membrane Controller



KVM Switches

- Up to 16 PCs connection
- VGA, Keyboards & mouse all-in-one by 15 pin KVM cable

