



Digital Signage LCD Frame Advertising Media Player Displays

EDD2700



- plug & play
- landscape or portrait
- scrolling text
- 24/7 usage
- high definition
- HDMI™
- image, video & music
- secure input compartment
- wide viewing angle
- scheduling software
- eco-friendly power timer
- LED backlit




Plug-n-Play Solution

Custom Digital Signage In 3 Easy Steps!

No Internet Connection Required.



1. Save image or video file to USB



2. Plug USB into player



3. Play on screen!

"These high-definition LED Displays are simple to use and are purpose built for commercial environments"

EDD2700

FEATURES:

- Digital Signage LCD Frame
- Commercial Grade LCD with Metal housing
- Anti-Reflective AR 3mm Front Glass for protection
- CF / SD / USB Plug and Play
- High Definition 1920 x 1080
- LED backlit
- Play Video/Photo/Music
- PG, MP3, MPG1/2/4, AVI, DIVX
- Additional DVI/ HDMI input
- Wide Viewing angle
- Auto-Play, Auto-repeat
- Support Timer to programming power on/off
- Support play list to specify files to play
- Support Programmable Photo Slide Timing
- Support Disconnection Memory to continuously play where it break
- Power Resume : Continue play the content from break point after power recover
- Power on password Setting
- Photo Rotation
- Full Function Remote Control
- Optional Built in Speakers
- Optional High brightness 1000nits
- Optional Motion Sensors and Dimming Sensors
- Optional 6mm Vandal Proof Safety Glass
- Optional Stainless steel Front Bezel

LCD SPECIFICATIONS:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 27" viewable diagonal area	
	Active Area / Pixel Pitch	597.89(H) x 336.31 (V) mm / 0.3114(H) x 0.3114(V) mm	
	Native Resolution / Colors	1920(H) x 1080(V) / 16.7 Million	
	Brightness / Contrast	300 cd/m ² (typ) / 1000 :1	
	Response Time	^ 3.4 ms	
	Viewing Angle (typical)	H. 178° (- 89° ~ + 89°) , V. 170°(- 85° ~ + 85°)	
	Light Source	CCFL , Long life, 50,000 hrs (typ)	
Input Sources	PC System	Signal	Analog RGB (0.7/1.0 V _{p-p} , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F _H : 30 - 82Khz , F _V : 50 -75Hz
	Audio System	3W Amplifier	
Input Terminals	1 x VGA (15 Pin Female D-Sub), 1 x PC Audio (Stereo Headphone Jack), 1 x AC-Inlet		
Convenient Features	Auto Calibration , Back Light Adjustment, Plug&Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages , Wall Mount Ready (VESA 400 x 200 mm)		
Power	Internal power supply with universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz		
Power Consumption	Operation / Power Saving	35 watt, < 5 watt (Support DPMS)	
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F), 10% ~ 90% (no condensation)	
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F), 10% ~ 90% (no condensation)	
Certification	FCC,CE		
Dimensions	Physical	With Base(W x H x D): TBD	
		Without Base(W x H x D): TBD	
	Carton	W x H x D = TBD	
Weight	N.W. / GW.	10.0 Kgs/11.5 Kgs	

Options	Touch	Video/TV	Enhanced Panel	Others
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Capacitive touch	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming


Digital Signage LCD Frame Advertising Media Player Displays

EDD2700

MEDIA PLAYER SPECIFICATIONS:

Video Function	MPEG-1 video playback
	MPEG-2 video playback
	MPEG-4 at full screen D1 video playback
	AVI
	Video Bandwidth -ASF simple profile 320 x 240 video
Photo Function	Motion JPEG playback
	JPEG photo playback
	Progressive JPEG photo playback
	Photo Bandwidth -
	Motion JPEG Maximum 10 fps
Audio Function	JPEG minimum 16x16 pixels, Maximum 5120x3840 pixels
	MP3 music playback
	DIVX
	WMA music playback
	AAC audio decode and playback
Media Card Supported	Audio bandwidth - MP3 minimum 32Kbps, Maximum 256Kbps
	CF / SD / USB
Convenient Features (By Remote Controller)	Auto-Play, Auto-repeat
	Support Timer to programming power on/off
	Support play list to specify files to play
	Support calendar
	Support Disconnection Memory to continuously play where it break
	Support auto copy content from USB disk to CF card with password
	Play/Pause , Stop
	Page up , Page Down
	Photo Zoom In/Out
	Photo Rotation
	Programmable Photo Slide Timing

MECHANICAL DRAWING:

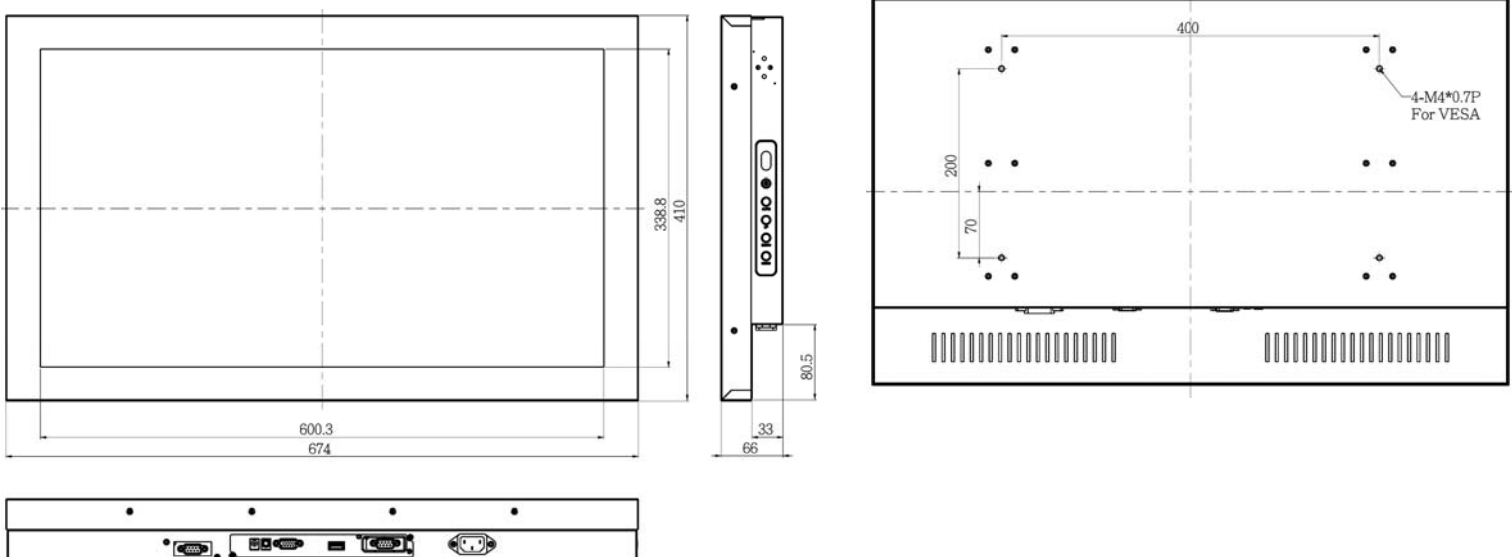

i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

"These high-definition LED Displays are simple to use and are purpose built for commercial environments"