



Model: 3220L

3220L 32" LCD Desktop/Wall-Mount Touchmonitor

The ELO 3220L is especially designed for public viewing of advertisements, maps and other consumer information, as well as interactive digital signage. The ELO 3220L features quiet, fanless operation and built in speakers and can be mounted in portrait mode. VGA loop through allows daisy-chaining of multiple monitors, and the monitor can be remotely controlled by a network.

Features

- Available with IntelliTouch Surface Wave Technology and dual serial/USB interface
- High quality panel with 178° total viewing angle
- Wide format WXGA resolution for sharper display
- Metal bezel adds durability for protection against vandalism
- Controls on the back rather than the front, for less public access
- Desktop base can be removed or reversed for wall mounting
- VESA mounting option
- Detachable speakers included
- Sealed touchscreen
- Multilingual on-screen display (OSD)

Specifications	Part I
Model	3220L
Series	5000
Availability	Worldwide (In EU/Asia, available on a project basis only)
Case/bezel color	Black
Display	Size : 32" diagonal Type : Wide format WXGA Aspect ratio : 16 x 9
Useful screen area	Horizontal : 27.6" (701.54 mm) Vertical : 15.6" (396.24 mm)
Monitor dimensions (without base and speakers)	Width : 31.2" (794 mm) Height : 19.2" (490 mm) Depth : 5.32" (130 mm)
Optimal (native) resolution	1360 x 768 at 60 Hz
Other supported resolutions	1360 x 768 at 60 Hz 1280 x 768 at 60 Hz 1024 x 768 at 60-75 Hz 800 x 600 at 60-75 Hz 720 x 400 at 70 Hz 640 x 480 at 60-75 Hz
Colors	16.7 million
Brightness	LCD panel : 500 cd/m ² (typical) with IntelliTouch : 450 cd/m ² (typical)
Response time	8 msec
Viewing angle (typical)	Horizontal : 178° total Vertical : 178° total
Contrast ratio	1000:1 (typical)



Toll Free: 1-888-itech-18 Fax: 1-510-372-2736 E-mail: infor@i-techcompany.com

www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com









Model: 3220L

3220L 32" LCD Desktop/Wall-Mount Touchmonitor

Specifications	Part II
Model	3220L
Pixel pitch	0.067" x .201" (0.170 mm x 0.511 mm)
Connectivity (AV Input)	Component (YPbPr) x 1 Audio (left/right) for YPbPr x 1 S-Video x 1 Composite (CVBS) x 1 Audio (left/right) x 1 SCART x 1
Connectivity (AV Output)	Audio (left/right) x 1 Composite (CVBS) x 1 Ext 3.5 mm jack x 1
Power supply	Type : Built in, 90?264 VAC, 50/60 Hz
Power consumption	100W (PC); 130W (TV) . Off mode : <3W
Temperature	Operating : 0°C to 35°C ; Storage : -10°C to 60°C
Humidity	Relative : 5%?90% ; Operating : 20%-80% ;Storage : 20%-80%
Weight (approx.)	Shipping : 42.3 lb (19.2 kg) Shipping box dimensions
Warranty	Monitor : 3 years Backlight lamp life : 50,000 hours MTBF : 50,000 hours
Agency approvals	CE
On-screen display (OSD)	Multilingual OSD

Accessories

IntelliTouch Stylus Pen :
Stylus pen with rubber tip,
designed specifically for
use with IntelliTouch
surface wave touch
technology.

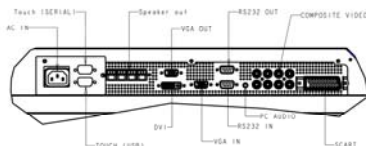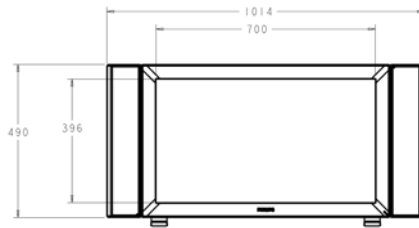

Toll Free: 1-888-itech-18 Fax: 1-510-372-2736 E-mail: infor@i-techcompany.com

www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com