



**27" Open Frame Monitor with 1500nits LCD Applied**  
 1920x1080 resolution, I/O:VGA/DVI/HDMI, power: 100~240V AC-in, metal chassis with ear mount design, external sensor for brightness control accessories: VGA cable x1, AC power cable x1, light sensor cable x1

**Model: GOPW2700HB2V2**

## FEATURES:

- 27" LCD support 1920x1080 FHD resolution
- High brightness: 1500 nits LCD applied
- Video signal IO: VGA / DVI / HDMI
- 178 / 178 extra wide view angle
- Special design for 24/7 long-term operation
- Auto brightness control integrated
- Auto Power On: Monitor is always "ON" when connect to power.
- Auto Video Signal On: Monitor (Backlight) will turn off when no video signal, but it will Auto turn back on.

## SPECIFICATIONS:


Function	Items	Description	Remark	
Display	Display area (mm)	597.6 (H) x 336.15(V)	(27" 16:9 diagonal)	
	Brightness (nits)	1500		
	Optimum resolution	1920 x 1080		
	Contrast Ratio	3000:1	Dark room	
	View angle (W /H)	178 / 178 degree	All direction	
	Backlight Life	50K hours (typ.)		
System	Video input	VGA / DVI / HDMI	Video signal auto-detection	
	Video output	NA		
	Audio output	Built-in	(Option)	2Wx2 R/L
		Extend	NA	
	Memory	NA		
	Storage	NA		
	Ethernet	NA		
Wireless	NA			
Cover glass	Type	NA		
	Protection glass	NA		
	Support OS	NA		
Special Control	Manual	(Option)		
	OSD	5 keys at back side		
	RS232	(Option)		
	Display feedback	NA		
Power	Power Input voltage	AC 100~240 V		
	Consumption (W)	100		
Mechanical	Outline (mm)	646.40 x 394.59 x 43.74 (D)	With brackets	
	Mounting	Ear mounting	200x200 (mm) VESA	
	Weight	TBD		
Environment	Operating temp.	<u>-10~50 0C</u>	TFT surface	
	Storage temperature	<u>-20~60 0C</u>		
	IP protection	NA		
	Anti-vandal	NA		
	Auto brightness	Yes	By external light sensor cable	
	Outdoor visibility enhance	(Option)		
	Direct sunlight	NA		
Certification	CE, FCC			

*\*Specifications subject to change without notice, not responsible for typographical errors.*

**Modified Date: 01-12-2021**

## DRAWINGS FOR REFERENCE:

This is subject to change without Notice. Final Drawings will be provided for Approval after Order.

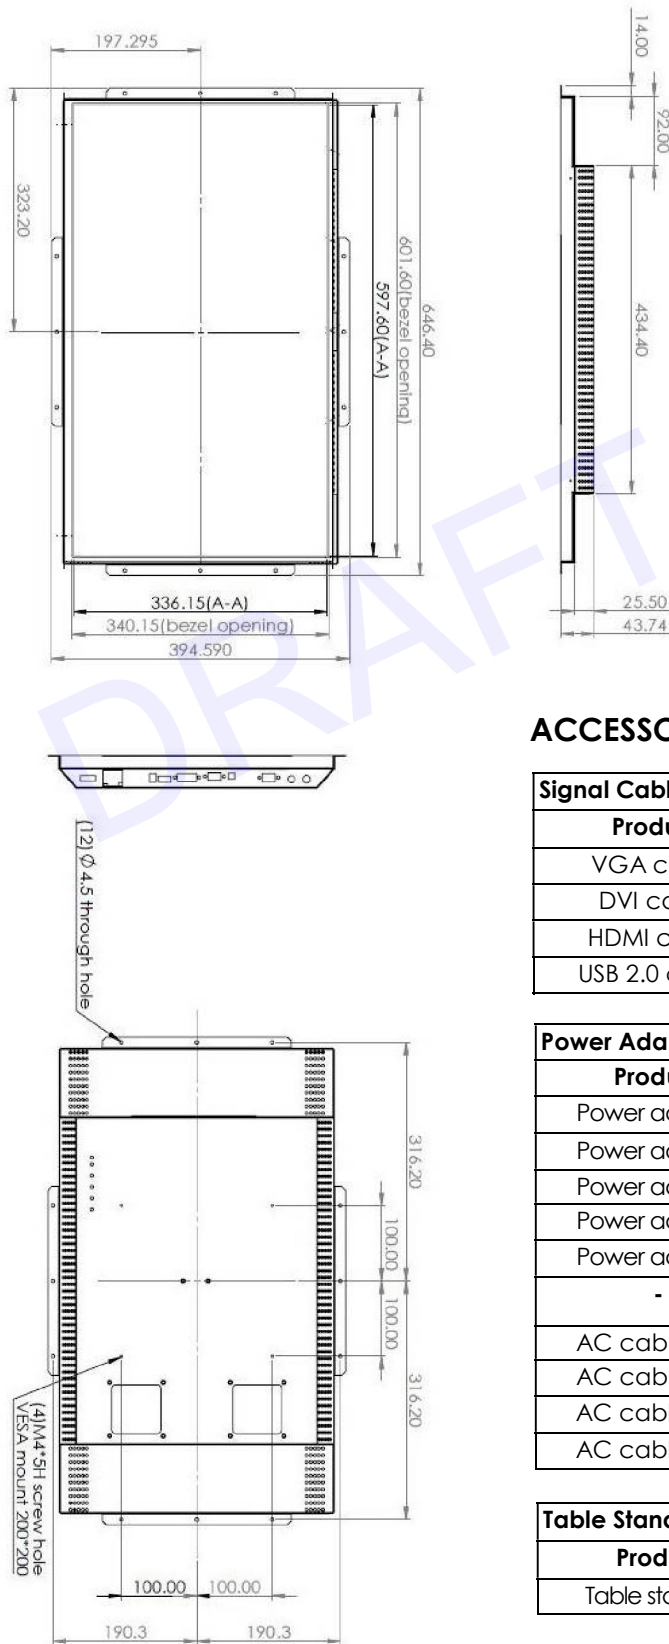

## ACCESSORIES for Option: *Please contact our sales team for details*

Signal Cables	
Product	Description
VGA cable	M to M, 1.5M
DVI cable	M to M, 1.8M
HDMI cable	M to M, 1.2M
USB 2.0 cable	Type A to Type A, 1.8M; for touch

Power Adapter & AC Cables	
Product	Description
Power adapter	I/P:100~240V; O/P:24V (60W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:24V (90W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (40W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (60W); (US2/EU2)
Power adapter	I/P:100~240V; O/P:12V (60W); (US3/EU3)
-	-
AC cable (US)	(US3) 1.8M, US type plug
AC cable (US)	(US2) 1.5M, US type plug
AC cable (EU)	(EU3) 1.8M, EU type plug
AC cable (EU)	(EU2) 1.5M, EU type plug

Table Stand	
Product	Description
Table stand (S)	203(W)*213(H)*227(D)mm / VESA 75x75 mm